



TZ-17 Thermolizer

Description

Belshaw's TZ-17 Thermolizer is part of the Thermoglaze system for frozen donut processing. The TZ-17 is designed for thawing and maintaining moisture in frozen donuts over a period of up to five hours. In this way, frozen donuts can be reheated in less than 5 minutes.

The TZ-17 has adjustable heat and humidity controls and with a blower system for evenly circulating warm air.

The TZ-17 does not plug into the Thermoglaze and is operated independently

Standard features

- Accepts 17"x25" screens (also accepts up to 23"x23" screens)
- 17 shelves with 3" shelf spacing when all 17 are used
- Capacity 68 dozen donuts/hour at proofing time 30 minutes (using 17" x 25" screens holding 24 donuts each)
- Six plexiglass doors (enables the operator to put in or take out one or two screens as they are ready, without opening a full height door)
- Thermostat-controlled adjustable dry heat
- Thermostat-controlled adjustable humidity (water reservoir with element)
- Blower system for evenly circulating warm humid air
- 4 heavy duty casters (2 lockable)
- Fully self-contained electrical compartment that can be removed like a drawer
- Removable shelves
- Stainless steel construction
- No plumbing, hard wiring or special installation
- 208 or 240V operation
- ETL certified to UL-197, CSA C22.2. NSF certified

Options

- Auto-water connection
- Worldwide voltages (see model selection)



Belshaw TZ-17 Thermolizer

Dimensions

- Overall height: 75" (190cm)
- Overall width: 28" (71cm)
- Overall depth: 32" (81cm)

Shipping data

Data is approximate for North America shipments


- Carton size: 80" x 37" x 31"
- Carton weight: 300 lbs (137 kg)

Certifications



- Certified by ETL to UL-197, NSF Std 4, and CSA C22.2
- Certified by NSF Std 4
- CE approval on selected models (see table below)

TZ-17 views

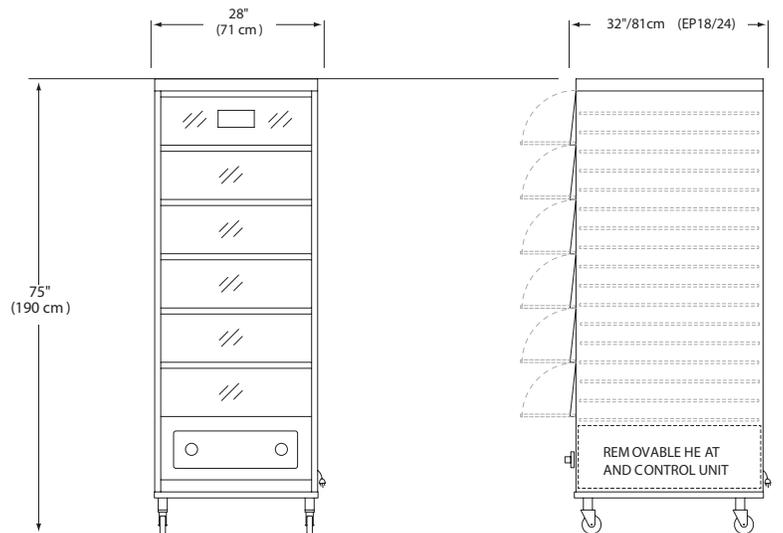

Model Selection

Item Nbr	Description key	Volt, Hz, Phase	Amps, Watts	Specified options
20220	TZ17-AW-220/240,50/60,1-D	220/240,50/60,1	17.7A, 4.3kW	Domestic, autowater
20221	TZ17-AW-240,50/60,1-C	240,50/60,1	17.7A, 4.3kW	CE/export, autowater
20223	TZ17-MF-208,50/60,1-D	208V,50/60,1	20.5A, 4.3kW	Domestic, manual fill
20224	TZ17-MF-240,50/60,1-C	240,50/60,1	17.7A, 4.3kW	CE/export, manual fill
20227	TZ17-AW-208,50/60,1-D	208,50/60,1	20.5A, 4.3kW	Domestic, autowater
20228	TZ17-MF-208,50/60,1-D	208V,50/60,1	20.5A, 4.3kW	Domestic, manual fill
20257	TZ17-MF-200,50,1-B	200V,50,1	19.9A, 4.0kW	Japan, manual fill
Description key codes:		MF=Manual water fill AW=Auto-water fill C=CE approved D=Domestic		

Accessories

Item Nbr	Description
SL200-0004	GLAZING SCREENS 17 X 25