


- Base mounting options available with all sizes
- Temperature range of fluids up to 450°F (232°C)



KEY APPLICATIONS

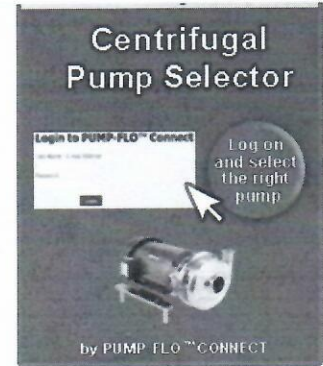

SPECIFICATIONS



| MODEL | INLET | OUTLET | MAXIMUM IMPELLER SIZE | MAXIMUM CAPACITY | | MAXIMUM HEAD | |
|--------|-------------------------------|------------|--------------------------------------------|-----------------------|----------------------|----------------|-----------------|
| | | | | 1750 RPM | 3500 RPM | 1750 RPM | 3500 RPM |
| 2045 | 1" (38mm) 2" (51mm) | 1½" (38mm) | 4½" (114 mm) | 97 GPM (22 m³/hr.) | 190 GPM (43 m³/hr.) | 22 ft. (7 m) | 88 ft. (27 m) |
| 2065LV | 1½" (38mm) thru 2½" (64mm) | 1½" (38mm) | 6½" (165 mm) | 100 GPM (23 m³/hr.) | 200 GPM (45 m³/hr.) | 44 ft. (13 m) | 180 ft. (55 m) |
| 2065 | 2½" (64mm) | 2" (51mm) | 6½" (165 mm) | 245 GPM (56 m³/hr.) | 400 GPM (91 m³/hr.) | 47 ft. (14 m) | 190 ft. (58 m) |
| 2065HV | 3" (76mm) | 2" (51mm) | 6½" (165 mm) | 370 GPM (84 m³/hr.) | 500 GPM (114 m³/hr.) | 50 ft. (15 m) | 200 ft. (61 m) |
| 2075 | 3" (76mm) | 1½" (38mm) | 8 ¹¹ / ₁₆ " (218 mm) | 125 GPM (28 m³/hr.) | 300 GPM (68 m³/hr.) | 80 ft. (24 m) | 320 ft. (98 m) |
| 2085LV | 2" (51mm) | 1½" (38mm) | 8½" (216 mm) | 70 GPM (16 m³/hr.) | 145 GPM (33 m³/hr.) | 81 ft. (25 m) | 330 ft. (101 m) |
| 2085 | 3" (76mm) 4" (102mm) | 2½" (64mm) | 8 ¹¹ / ₁₆ " (218 mm) | 480 GPM (109 m³/hr.) | 840 GPM (191 m³/hr.) | 85 ft. (26 m) | 342 ft. (104 m) |
| 2105 | 4" (102mm) 6" (152mm) | 4" (102mm) | 10½" (267 mm) | 1400 GPM (318 m³/hr.) | N/A | 133 ft. (41 m) | N/A |

DIMENSIONS



Select Model

MODEL 2045