

DRILLING RIG INVENTORY November, 2022



PORTABLE DRILLING UNIT

BREWSTER D4 Double Drum Carrier-Mounted Drive-In Portable Drilling Unit, S/N 1-67, LEBUS Grooved f/1" Drill Line, PARMAC 122 Hydromatic Brake p/b DETROIT Series 60 Diesel Engine, S/N-O6R0599092, w/ALLISON CLBT-5860 Transmission, IDECO KM-108-268ACH 108'H 268,000# Static Hook Load Telescoping Mast, S/N-1489, (2) Hydraulic Raising Rams, Racking Board, 5-Sheave Crown Block, Mounted on 5-Axle Carrier w/(4) Hydraulic Leveling Jacks, (2) Hydraulic Utility Winches, Walkways, Stairs, Fuel, Air & Hydraulic Tanks, 385/R22.5 Front & 11R24.5 Rear Tires, Hydraulic Makeup & Breakout System.

SUBSTRUCTURE/CATWALK

14'6"H Trailer-Mounted Substructure w/Rotary Beams, V-Door Ramp, Stairs, Safety Rails, Mounted on Tandem Axle Catwalk/Trailer w/20' Pull Out Extension, Lateral Base Beam.


GENERATOR

MARATHON Magnum 275 KW AC Generator, S/N-LM246405-0405, p/b DETROIT Series 50 Diesel Engine, S/N-N/A, w/Electric Starter, Radiator, Gauges, Skidded. The generator is mounted in 8'W X 20'L House w/Switchgear & Transformer, on Tandem Axle trailer that includes 2000 gallons of diesel fuel tanks and an integrated tool room. The Detroit Series 50 engine is fully permitted in California under the CARB PERP program.



MUD PUMPS

(1) GARDNER-DENVER PZ-7 Triplex Mud Pump, S/Ns-N/A, 550 HP, 7" x 7", w/Forged Steel Fluid End, Type D Pressure Gauge, MISSION Magnum 5" x 6" Centrifugal Charging Pump, Powered by 14 liter DETROIT Series 60 Diesel Engine, S/N-N/A, w/Air Starter, Radiator, Gauges, ALLISON 5860 Transmission, Mounted on Tandem Axle Rockover-Type Trailer.

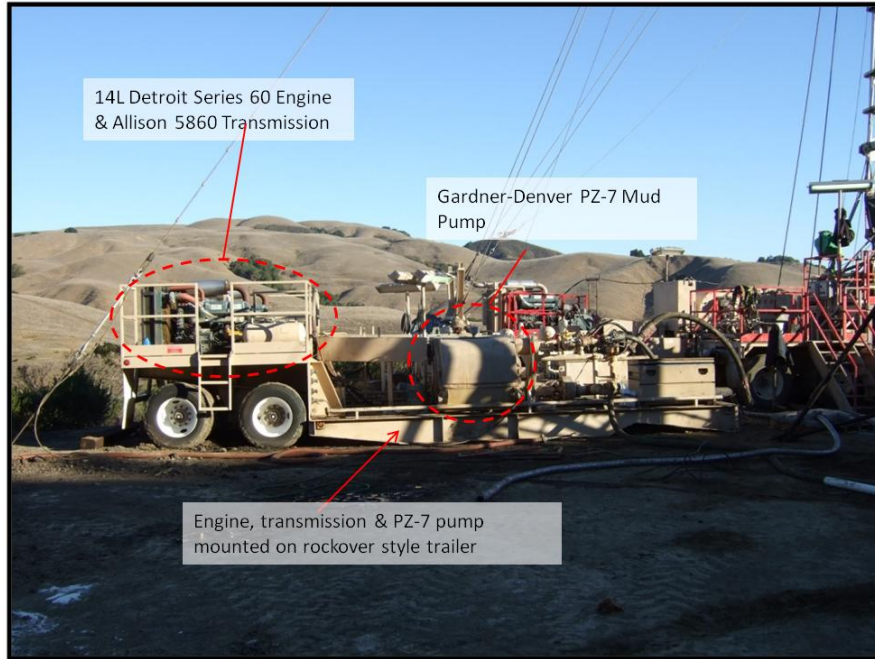

ROTATING/TRAVELING EQUIPMENT

GARDNER-DENVER 22-1/2" Rotary Table w/Split Master Bushing.

OILWELL SA-150 150-Ton Swivel

3-1/2" x 40'L Square Kelly.

VARCO 4KRVP Kelly Drive Bushing.

Upper Kelly Valve

McKISSICK 150-Ton Block/Hook w/(4) 24" Sheaves, WEB WILSON Hook

2-1/4" X 72" Elevator Links

WELL CONTROL EQUIPMENT

HYDRIL GK-12-900 Annular Blowout Preventer

SHAFFER Type E 10" 3000# Double Hydraulic Blowout Preventer

SHAFFER Model T-20120-3S 5-Station Closing Unit, S/N-152370L, w/279-Gallon Hydraulic Tank, (1) Air-Operated Hydraulic Pump, Triplex Pump p/b Electric Motor, (10) Accumulator Bottles, Skidded

MUD SYSTEM

8'W x 5'H x 44'L 270-Barrel 3-Compartment Mud Tank w/(2) 4" x 5" Shale Shakers, (2) Mission Magnum 5" x 6" Centrifugal Pumps p/b SIEMENS 50 HP Electric Motors, 3,000# Choke Manifold, Mounted on Tandem Axle Rockover-Type Trailer w/Stairs, Walkways, Safety Rails

RIG HOUSES

8'W x Approximately 28'L Doghouse w/V-Top, 3'L Porch, Knowledge Box, Bench Storage, Cabinets, Fluorescent Lights, Skidded, Mounted on 3-Axle Float

WATER TANK

500-Barrel. Water Tank

HANDLING TOOLS

Hydraulic Drill Pipe Spinner

WEB WILSON Type B Rotary Tongs w/Heads

BJ 150-Ton SD Drill Pipe Elevators

M&W 4-1/2" SS SD Elevators

WILSON 7" & 8-5/8" SS SD Elevators

VARCO 3-1/2" Drill Collar Slips

WOOLLEY 3-1/2" & 6" Drill Collar Slips

Mud Bucket

AUXILIARY EQUIPMENT

MARTIN-DECKER Type F Weight Indicator w/Pump Pressure, Tong Pull & RPM Gauges

2-1/2"ID x Approximately 40'L Rotary Hose

2-1/2"ID Vibrator Hoses

(2) 42"H x 28'L Triangular Pipe Racks

Fluorescent Rig Lights & Wiring

Approximately 5000' of 1" Drill Line w/Spool, Stand