



Rotorbake T16 18T Master Pro

Gas Supply

CODE: 926018680

Trays	18T 80x120 cm (17.2m ²)
Outside dimension	1950 L x 2674 P x 2550 H mm
Tray distance	93 mm
Power	93 kW - 80.000 Kcal/h - Ele. 2 kW
Weight	1300 Kg
Max temperature	270° C
Power supply	400 V ~ 3PH + N + PE 230 V ~ 3PH + PE 230 V ~ 1PH + N + PE 50-60 Hz

Equipment


BakeAIR multi-fan system	Double low emissive glass	High-performance thermal insulation
USB connection	Five fan speeds and semi-static cooking	Five cooking modes
Automatic chimney opening BakeDRY	Program blocking with password	Combustion chamber covered by 7-year warranty
Heat exchanger inside the cooking chamber	CE Certificate	Automatic control of dry/steam balance inside the chamber
Steam control in percentage BakeSTEAM	Automatic control of the cooking level and load	Double steamer RotorBake
Multi-timer function for multiple and mixed cooking	Time-programmable steam injection	Manual steam injection
Storage, viewing* and exportation of cooking data (haccp)	Customized programs mode	Manual mode
Preset programs mode	Automatic preheating	Cooling program
Delayed start programming	Delayed cooking programming	Cooking chamber automatic cooling
Pre-loaded and online cookbook	Automatic detection and errors report	

Options

Ethernet connection and wi-fi set-up BakeNET	S/S external paneling	Double-closing door and double gasket
Rotating platform	Double-rack rotating platform	Rack automatic lift for Rotorbake
Left door opening		

Rotorbake T16 18T Master Pro

Gas Supply

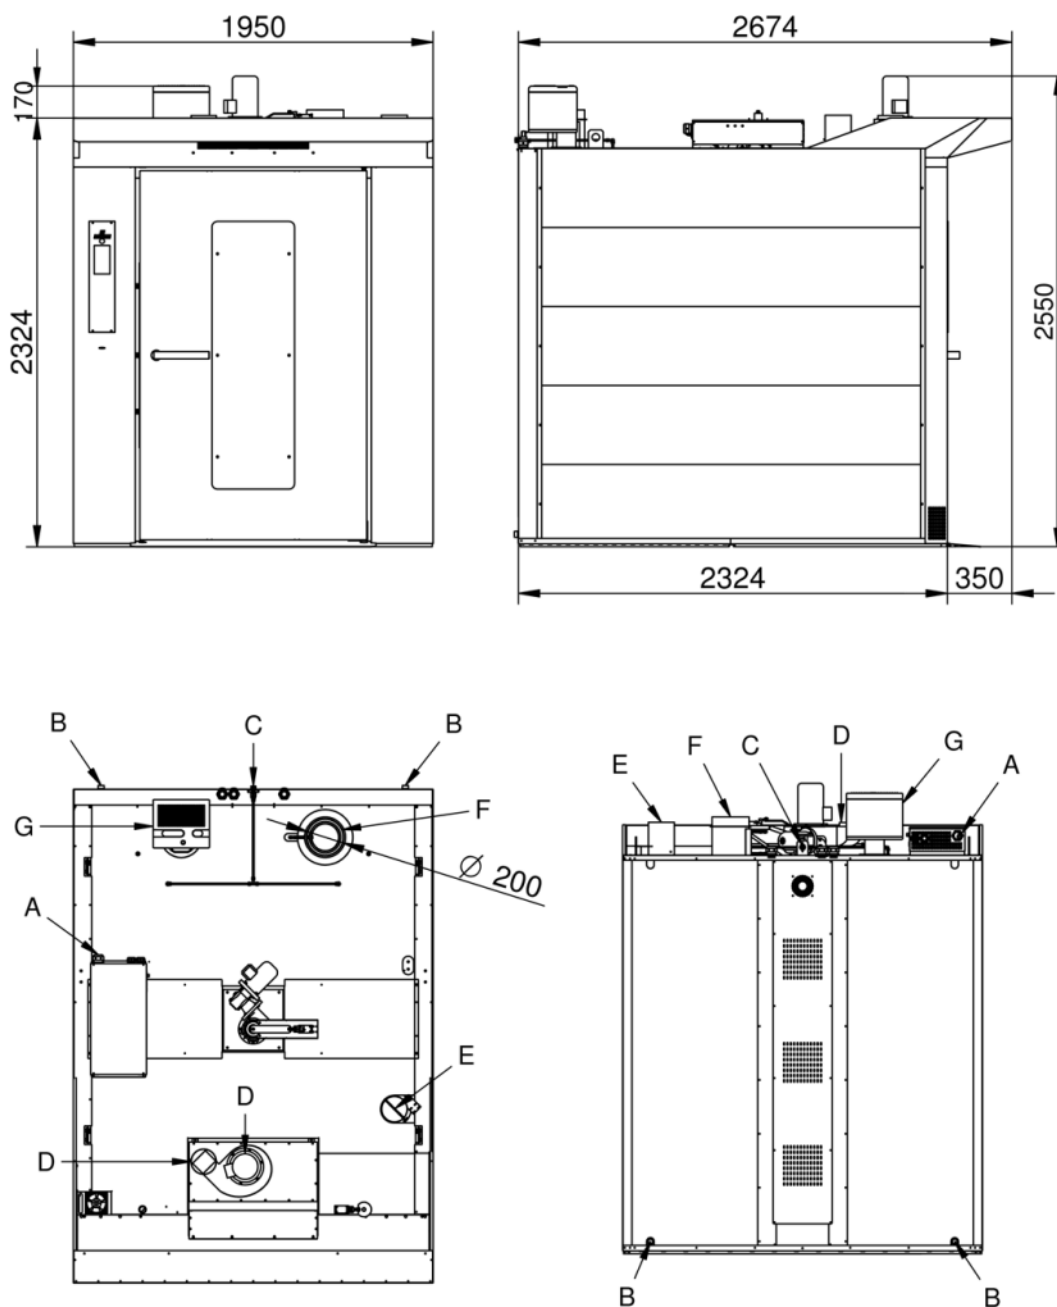

Legend


- A - Electric supply 2 kW - (Pg36)
- B - Water discharge 1"
- C - Water inlet 3/4"
- D - Extractor hood discharge
- E - Chamber steam discharge Ø 140
- F - Ø 200mm Combustion chamber fumes exhaust

G - Burner


Rotorbake T16 18T Master Pro

Gas Supply

Supply and Connections

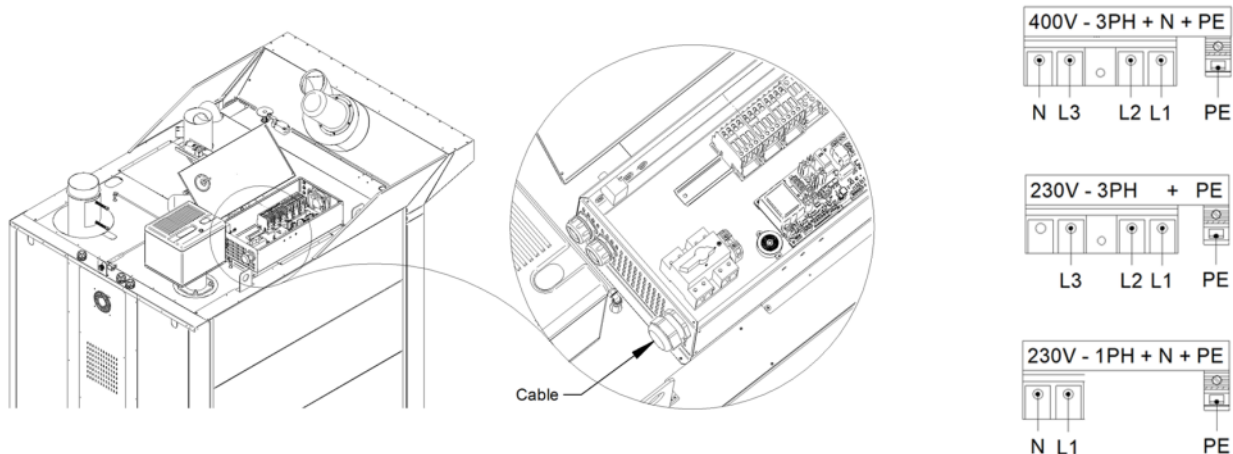

Packaging

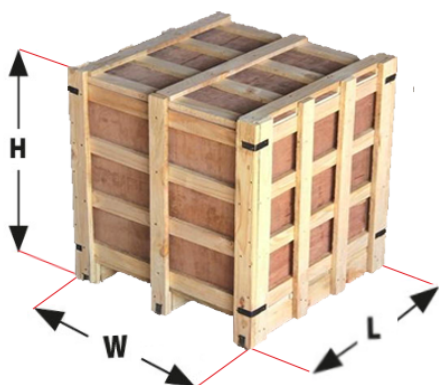

Packing size:	2030 L x 2670 P x 2550 H mm
Net weight:	1300 Kg
Gross weight:	1490 Kg