



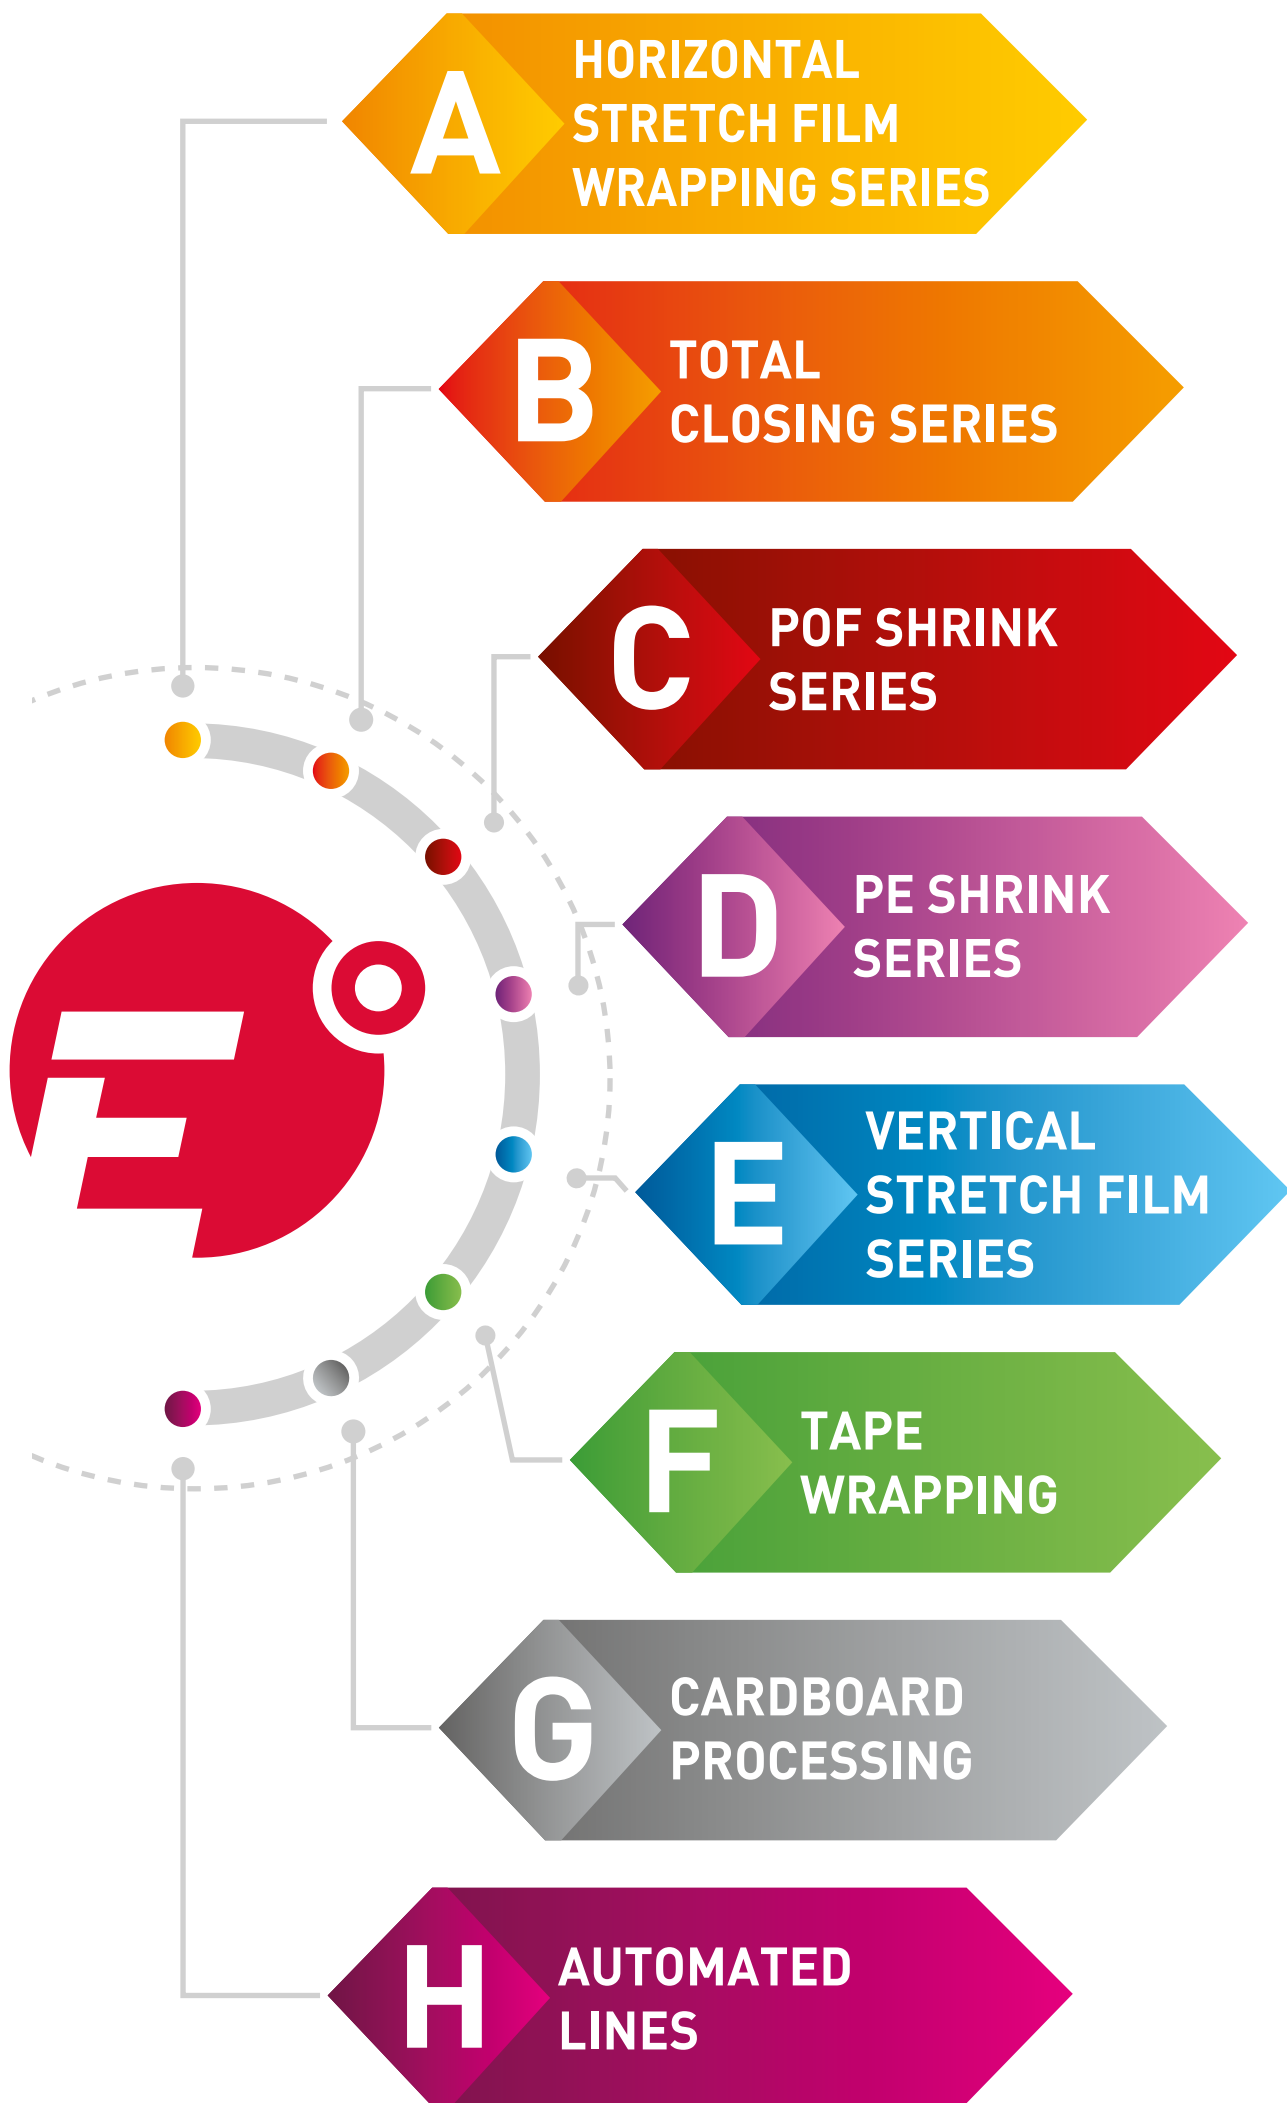
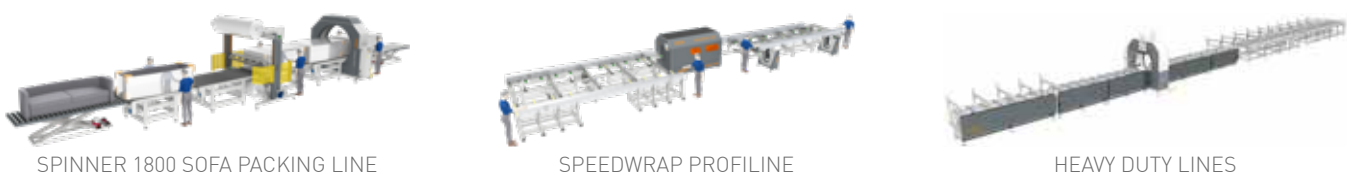


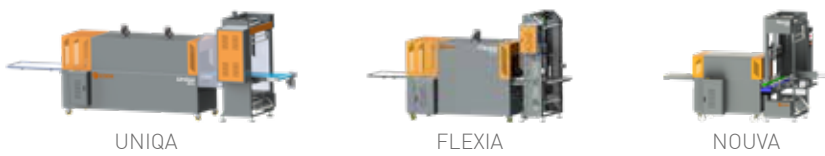

TAURUS
CRACO

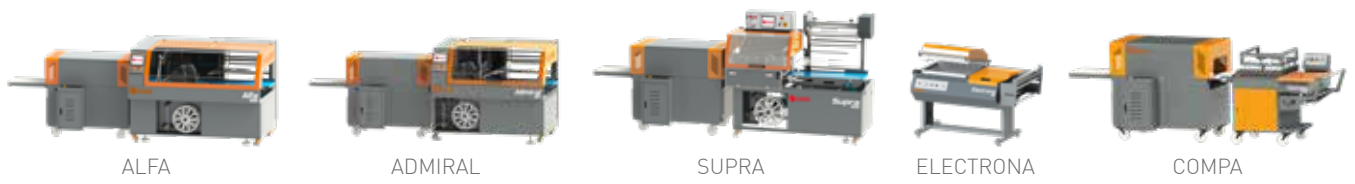

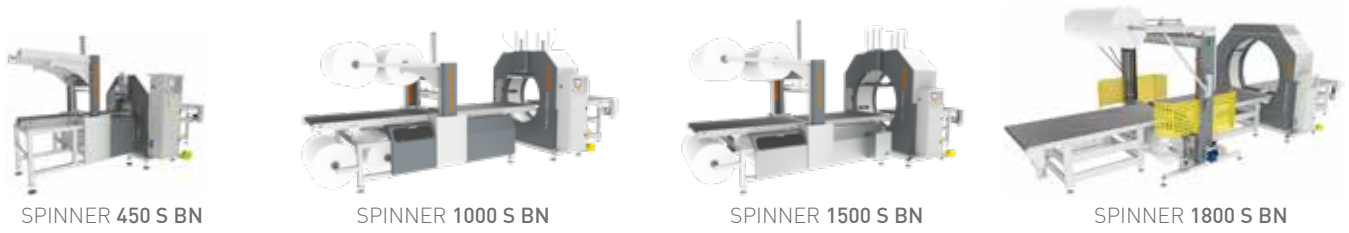

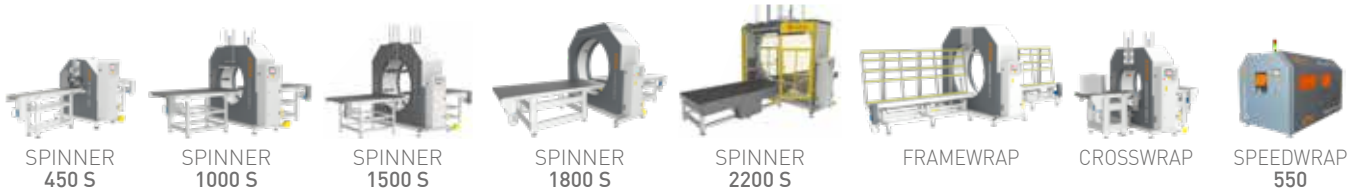



TOTAL CLOSING SERIES



TOTAL CLOSING SPINNER s BN SERIES





**TAURUS
CRACO**

UNPACK THE INNOVATIVE TECHNOLOGIES


SPINNER S BN Series

Edda Spinner series of Horizontal Stretch Wrapping Machine with various models are well-known as the best solutions of packaging needs.

All models are equipped with the latest technology. By the durable mechanical structure and required systems for operator safety, this machines compliance with European Union safety directives and are certified with CE Certificate. All standard components which used in machine are the best in their field as worldwide trademarks.

These machines are developed for a long and trouble-free servicing life and are produced with well-know, best quality components by our qualified staff.

Edda Spinner Series packing machines are intended for easy packing of the products by the PE bubble nylon, PE foam film and PE stretch film materials.

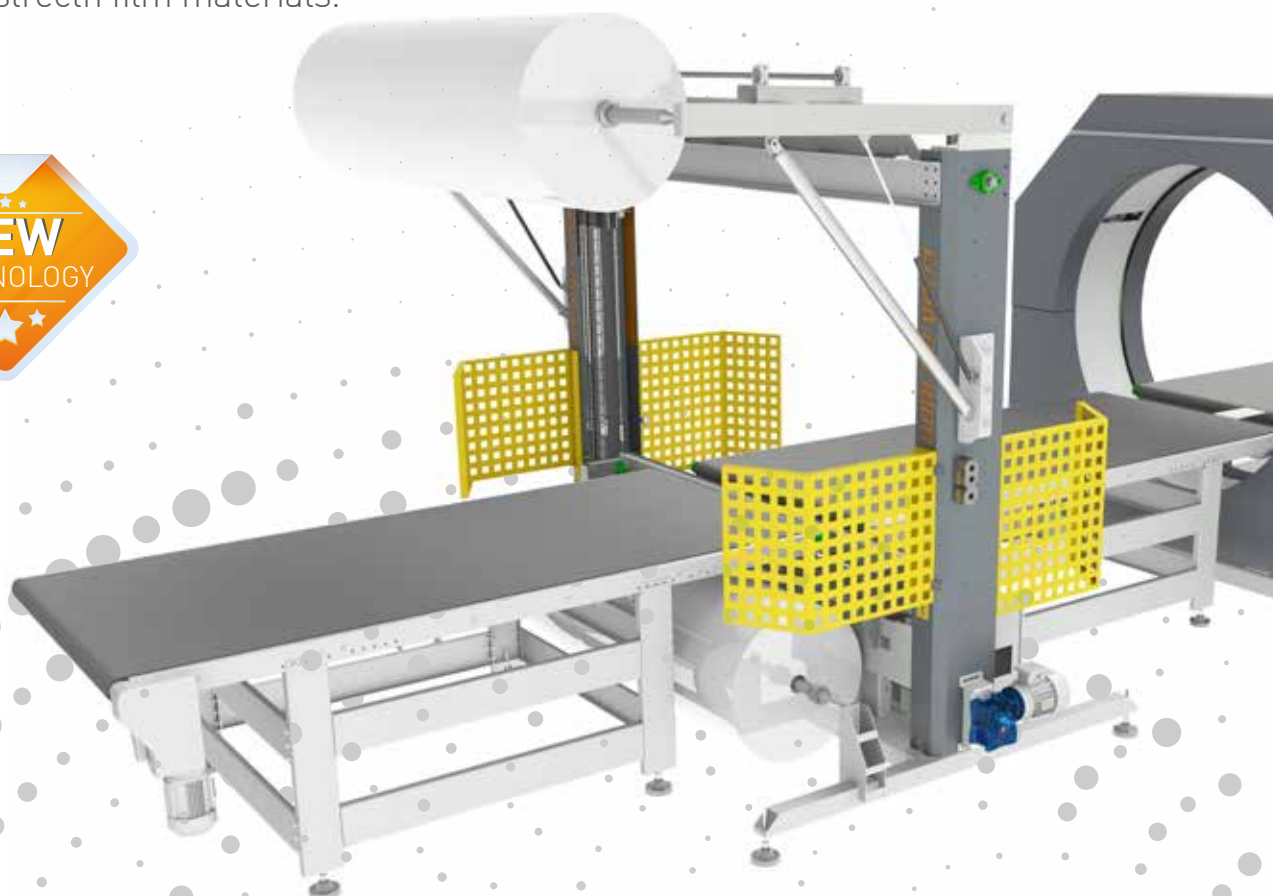



TAURUS CRACO

SPINNER 450 S BN

DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES PVC PROFILE PRODUCTS ETC.



TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited	
Min. Dimensions (W x H x L)	mm/inch	100 x 18 x 600*	3^{15}_{16} '' x 45_{64} '' x 23^5_8 ''

* With Short Part Nail

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1820	71^{21}_{32} ''
Total Length	mm/inch	2000	78^{47}_{64} ''
Working Height	mm/inch	901	35^{15}_{32} ''
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	15	
Max. Load Capacity	kgs/meter	100	

AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	450	17^{23}_{32} ''
Max. Film Reel Diameter	mm/inch	Ø500	19^{11}_{16} ''
Reel Core Diameter	mm/inch	Ø20 ~ Ø76	2^5_{32} '' ~ 2^{43}_{64} ''
Cutting & Welding System	°C	50 ~ 150	
Operating Temperature			
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

STRETCH FILM FEATURES

Max. Width	mm/inch	170	6^{11}_{16} ''
Max. Diameter	mm/inch	Ø 230	9^{1}_{16} ''
Reel Core Diameter	mm/inch	Ø 76	2^{63}_{64} ''
Recommended Thickness	micron	23, 30, 35	

(Max. Weight: 3 kg)

MACHINE GENERAL FEATURES

Main Motor Power	kW	1,1	
Max. Ring Rotation Speed	rpm	160	
Min. Ring Rotation Speed	rpm	40	
Total Power	kW	2,95	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Standard Machine Dimensions (W x H x L)	mm/inch	1571 x 2089 x 4195	61^{27}_{32} '' x 82^{1}_{4} '' x 165^5_{32} ''
Total Weight	kg	800	


* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)



TAURUS CRACO

SPINNER 1000 S BN

MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS - DOOR FRAMES AND MOULDINGS
LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

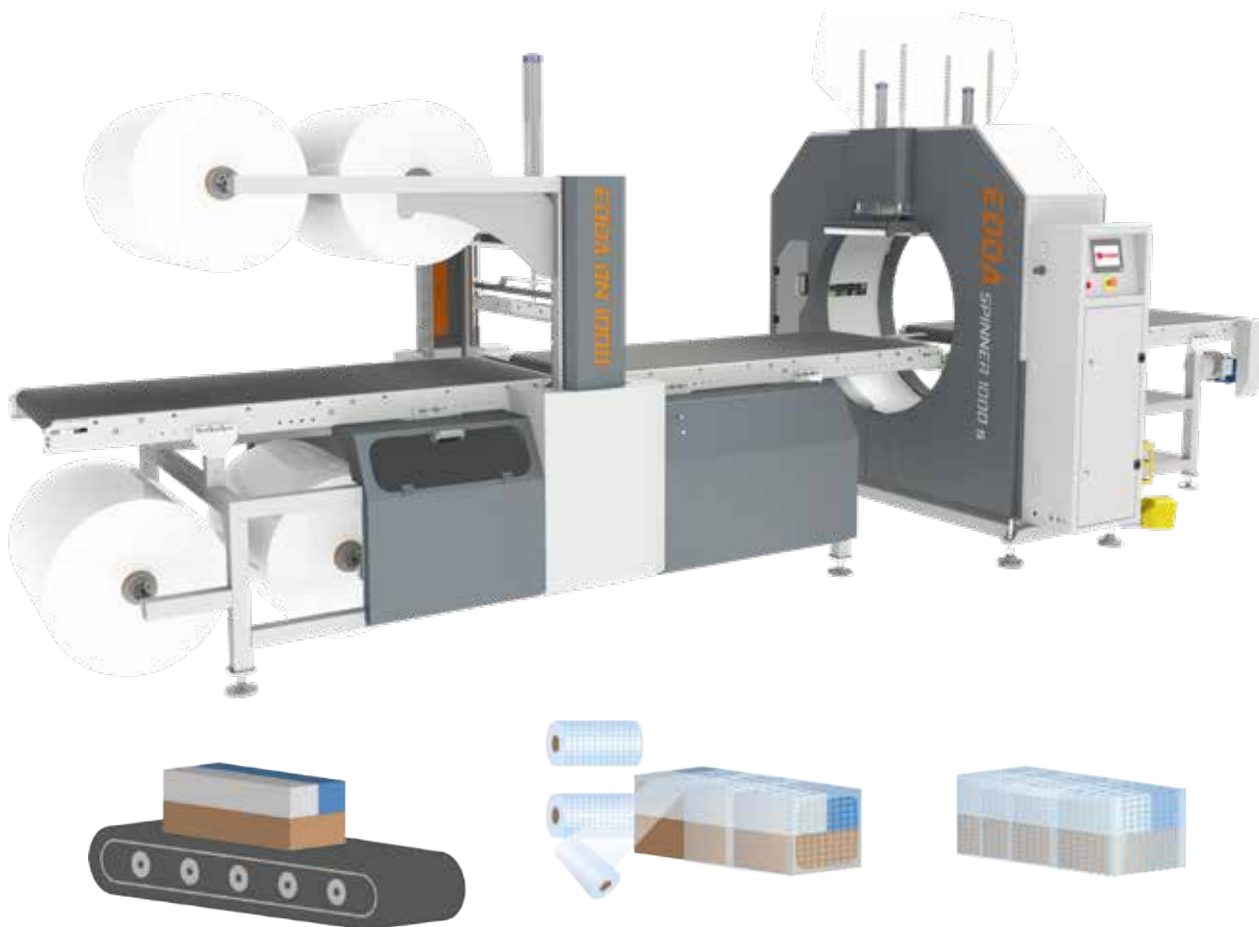

TOTAL CLOSING SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited
Min. Dimensions (W x H x L)	mm/inch	100 x 18 x 600* 3^{15}_{16} '' x 4^{5}_{64} '' x 23^{5}_{8} ''

* With Short Part Nail

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1924	75^{3}_{4} ''
Total Length	mm/inch	2000	78^{47}_{64} ''
Working Height	mm/inch	915	36^{1}_{2} ''
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	800	31^{1}_{2} ''
Max. Film Reel Diameter	mm/inch	Ø600	23^{5}_{8} ''
Reel Core Diameter	mm/inch	Ø20 ~ Ø76	2^{5}_{32} '' ~ 2^{63}_{64} ''
Cutting & Welding System			
Operating Temperature	°C	50 ~ 150	
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

STRETCH FILM FEATURES

Max. Width	mm/inch	170	6^{11}_{16} ''
Max. Diameter	mm/inch	Ø 230	9^{1}_{16} ''
Reel Core Diameter	mm/inch	Ø 76	2^{63}_{64} ''
Recommended Thickness	micron	23, 30, 35	

(Max. Weight: 3 kg)

MACHINE GENERAL FEATURES

Main Motor Power	kW	1,5
Max. Ring Rotation Speed	rpm	85
Min. Ring Rotation Speed	rpm	20
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G
Total Power	kW	3,75
Standard Machine Dimensions (W x H x L)	mm/inch	2191 x 2441 x 6362 86^{17}_{64} '' x 96^{7}_{64} '' x 250^{15}_{32} ''
Total Weight	kg	1320


* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)



TAURUS
CRACO

SPINNER 1500 S BN

BEDROOM FURNITURE - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS
DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND
PIPES PVC PROFILE PRODUCTS ETC.

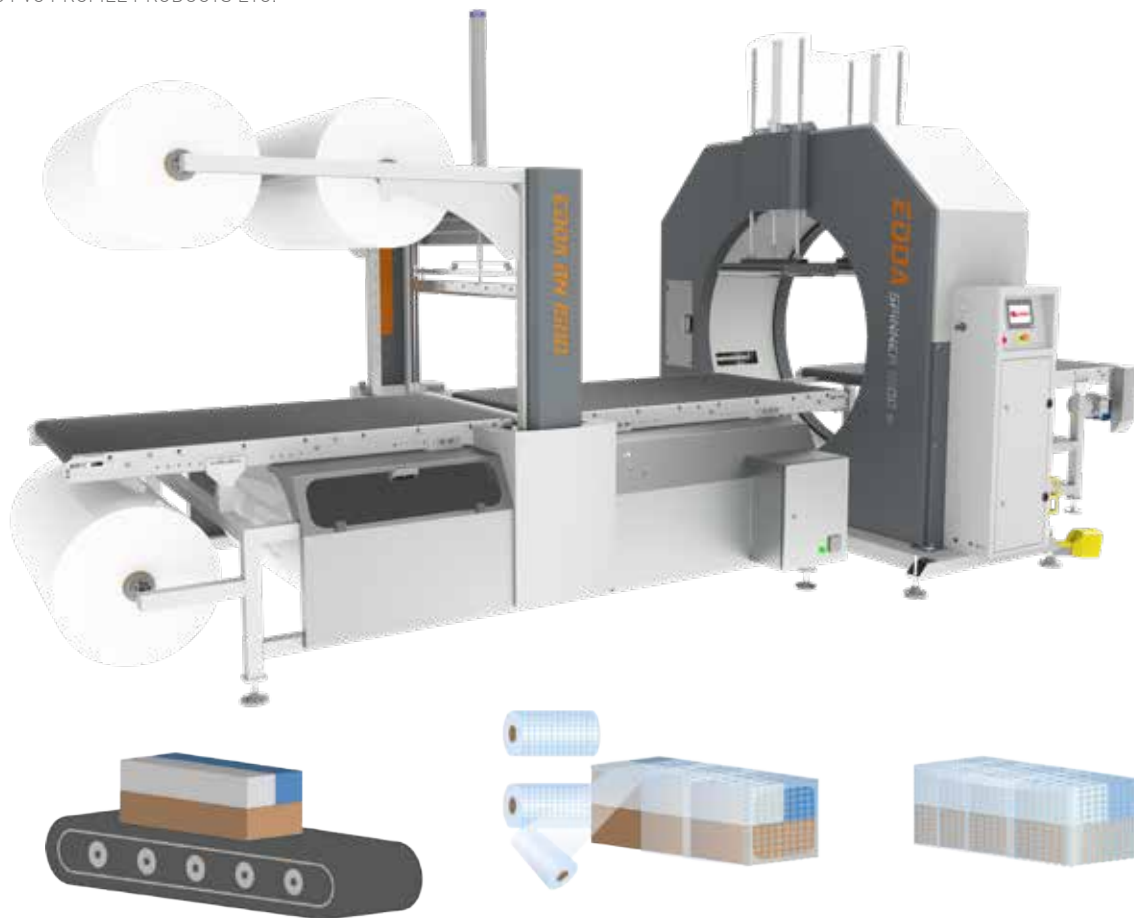

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited	
Min. Dimensions (W x H x L)	mm/inch	200 x 18 x 600*	$7\frac{7}{8}$ '' x $4\frac{5}{64}$ '' x $23\frac{5}{8}$ ''

* With Short Part Nail

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1924	$75\frac{3}{4}$ ''
Total Length	mm/inch	2000	$78\frac{47}{64}$ ''
Working Height	mm/inch	900	$35\frac{7}{16}$ ''
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	10	
Max. Load Capacity	kgs/meter	100	

AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	1350	$53\frac{5}{32}$ ''
Max. Film Reel Diameter	mm/inch	Ø600	$23\frac{5}{8}$ ''
Reel Core Diameter	mm/inch	Ø20 ~ Ø76	$2\frac{5}{32}$ '' ~ $2\frac{63}{64}$ ''
Cutting & Welding System			
Operating Temperature	°C	50 ~ 150	
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

STRETCH FILM FEATURES

Max. Width	mm/inch	250	$9\frac{27}{32}$ ''
Max. Diameter	mm/inch	Ø 230	$9\frac{1}{16}$ ''
Reel Core Diameter	mm/inch	Ø 76	$2\frac{63}{64}$ ''
Recommended Thickness	micron	23, 30, 35	

(Max. Weight: 4,5 kg)

MACHINE GENERAL FEATURES

Main Motor Power	kW	2,2	
Max. Ring Rotation Speed	rpm	60	
Min. Ring Rotation Speed	rpm	15	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	5,4	
Standard Machine Dimensions (W x H x L)	mm/inch	2741 x 2882 x 6532	$107\frac{29}{32}$ '' x $113\frac{15}{32}$ '' x $257\frac{11}{64}$ ''
Total Weight	kg	1700	


* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)



TAURUS CRACO

SPINNER 1800 S BN

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

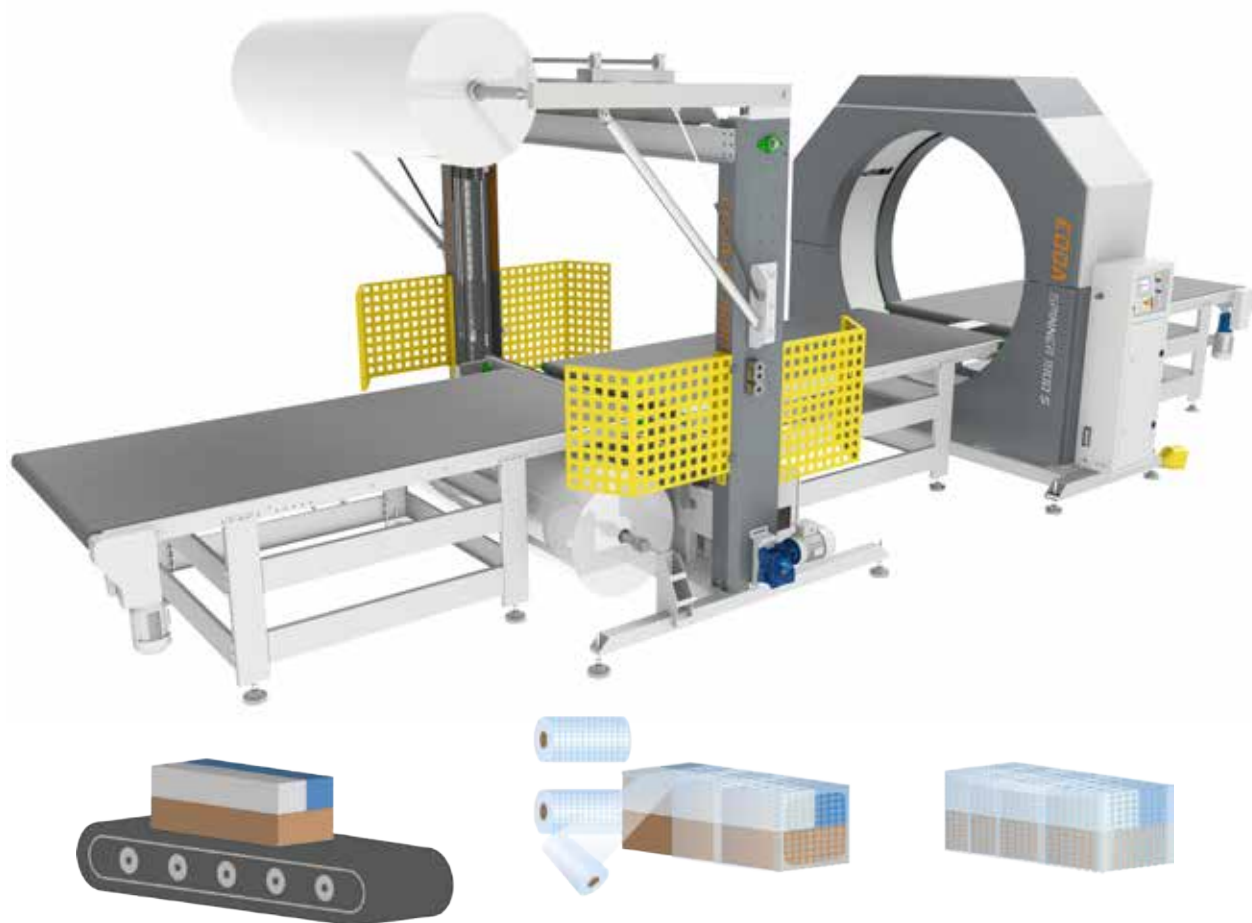

TOTAL CLOSING SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length	Unlimited		
Min. Dimensions (W x H x L)	mm/inch	700 x 200 x 1000*	27 ⁹ / ₁₆ '' x 7 ⁷ / ₈ '' x 39 ³ / ₈ ''

* With Short Part Nail

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	2680	105 ³³ / ₆₄ ''
Total Length	mm/inch	2910	114 ⁹ / ₁₆ ''
Working Height	mm/inch	950	37 ¹³ / ₅₂ ''
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	2000	78 ⁴⁷ / ₆₄ ''
Max. Film Reel Diameter	mm/inch	Ø650	25 ¹⁹ / ₃₂ ''
Reel Core Diameter	mm/inch	Ø20 ~ Ø76	25 ¹⁹ / ₃₂ '' ~ 2 ⁶³ / ₆₄ ''
Cutting & Welding System	°C	50 ~ 150	
Operating Temperature			
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

STRETCH FILM FEATURES

Max. Width	mm/inch	250	9 ²⁷ / ₃₂ ''
Max. Diameter	mm/inch	Ø 230	9 ¹ / ₁₆ ''
Reel Core Diameter	mm/inch	Ø 76	2 ⁶³ / ₆₄ ''
Recommended Thickness	micron	23, 30, 35	

(Max. Weight: 4,5 kg)

MACHINE GENERAL FEATURES

Main Motor Power	kW	3	
Max. Ring Rotation Speed	rpm	50	
Min. Ring Rotation Speed	rpm	10	
Total Power	kW	380 Volt - 50/60 Hz - 3P+1N+1G	
*Electric Supply	Volt - Hz	8,35	
Standard Machine Dimensions (W x H x L)	mm/inch	3242 x 3009 x 9191	127 ⁴¹ / ₆₄ '' x 118 ¹⁵ / ₃₂ '' x 361 ²⁷ / ₃₂ ''
Total Weight	kg	2600	



* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)



TAURUS
CRACO

SPINNER 1800 S BN

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

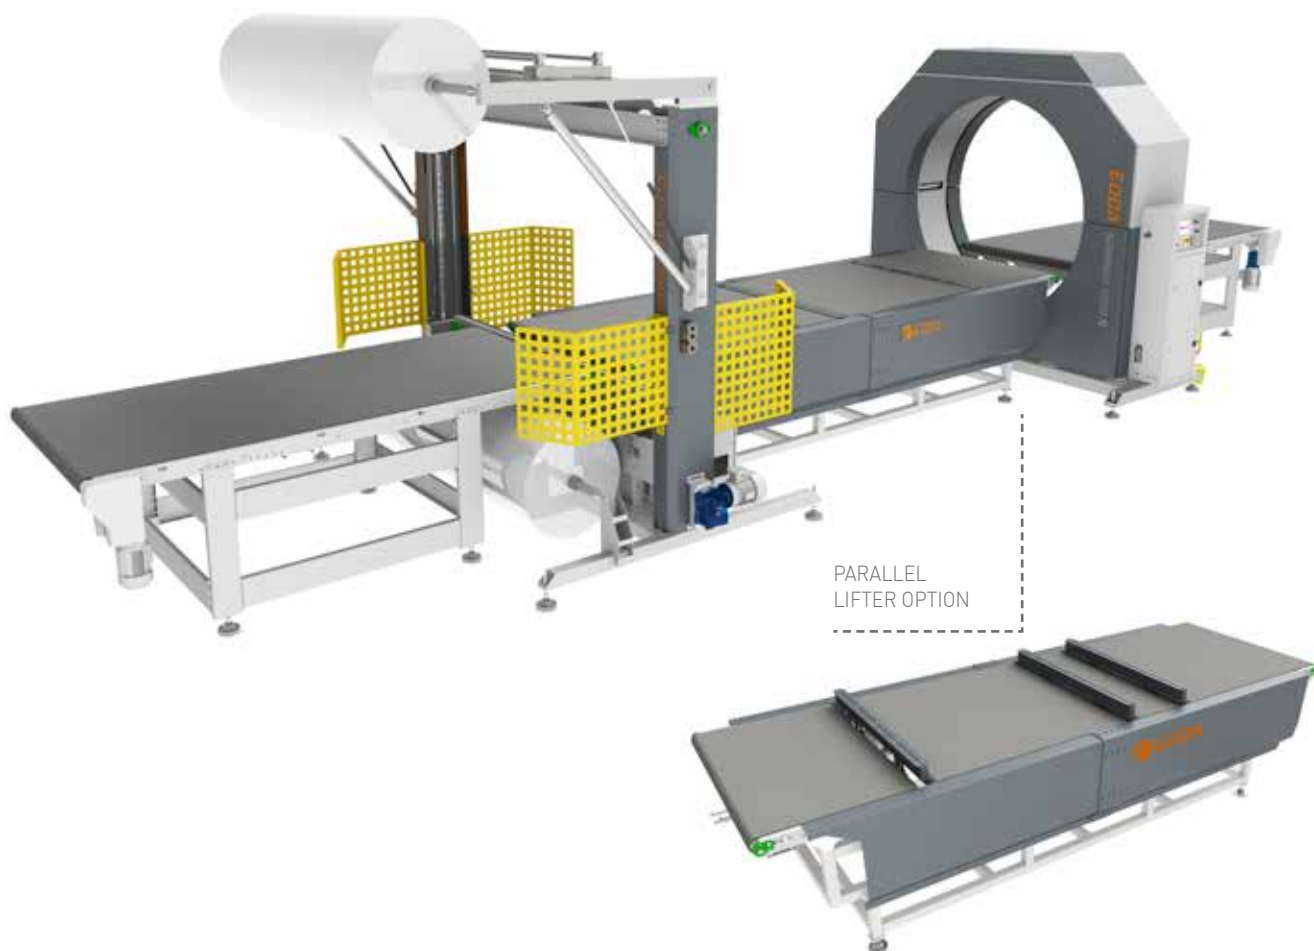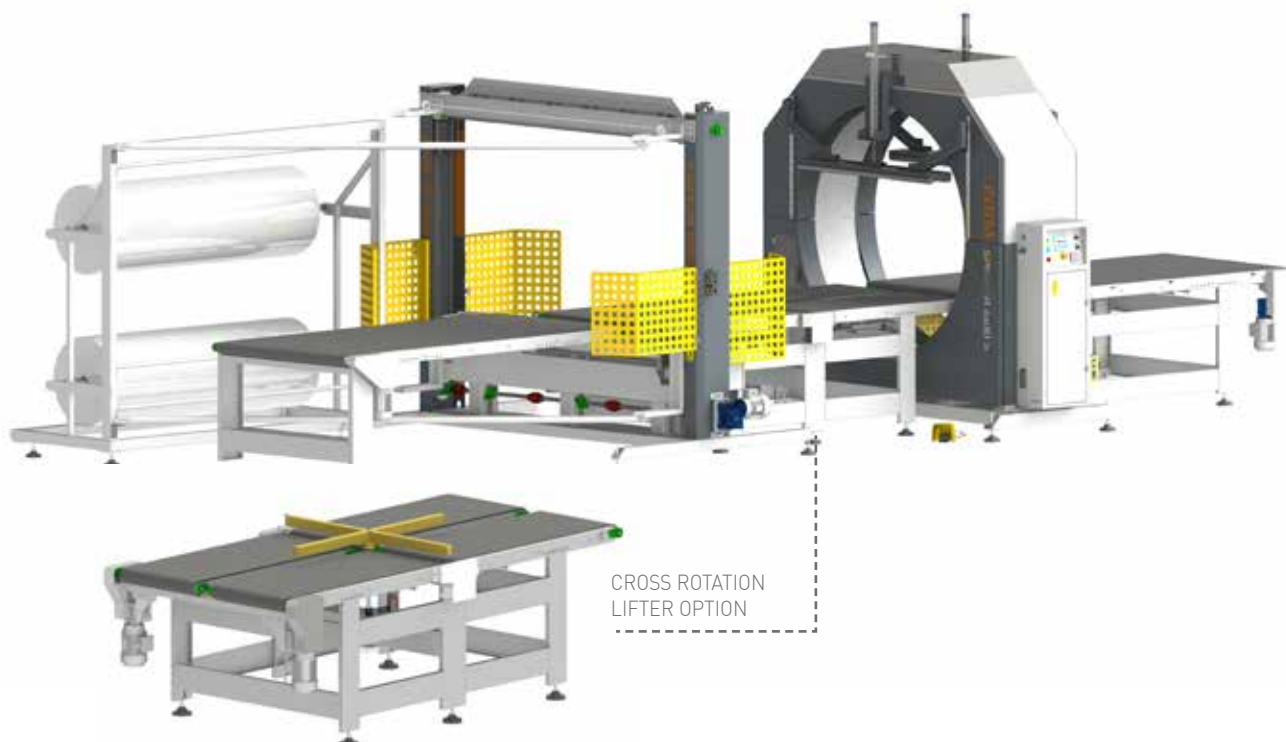

TOTAL CLOSING SERIES



TAURUS
CRACO

UNPACK THE INNOVATIVE TECHNOLOGIES

SPINNER S BN Series

The machine is equipped with improved component that allow the machine to work accurately, without failure and for a long time.



Stretch Film Cutting Unit




Stretch Film Carriage Unit



Motorized Conveyors



Foot Pedal Switch

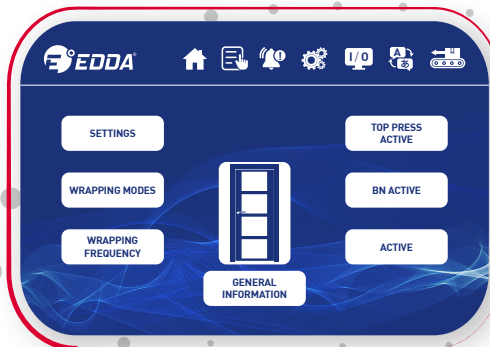

HMI Touch Panel

DO YOU

know which
equipment is
included



TAURUS
CRACO

UNPACK THE INNOVATIVE TECHNOLOGIES

SPINNER S BN Series

Keep your products in safe!

Flexible and universal packaging solutions for many industries. From small productions to huge manufacturing areas. Our team will help you to search the optimal equipment for your production needs.



Window



Wood



Furniture



Door



Metal



Sofa



Sandwich Panel



Bed base



Pallet

WHICH
sector
is yours



TAURUS
CRACO

UNPACK THE INNOVATIVE TECHNOLOGIES

SPINNER S BN Series

Advantage contents applicable to carton box machine.



Productivity;

Provides reduction in energy consumption and cost of packaging materials.



Practicality;

User-friendly touch panel has 5 different operating modes and recipes.



Ergonomics;

It provides easy adjustment of the machine parameters by touch panel screen.



Protection;

Optimal protection of products from external factors, reducing damages during transportation.



Immutability;

It provides an uniform shape of the packaging standard for all products.



Flexibility;

It allows to pack workpieces with different heights, lengths and thickness.



Strength;

It contains the long-lasting parts for serial usage and operation.

WHAT
are the
main
advantages



TAURUS
CRACO

OPTIONS

ACCESORIES AND OPTIONAL DEVICES FOR STANDARD MODELS



DIFFERENT LENGTH
MOTORIZED CONVEYOR



MANUAL ADJUSTING SIDE GUIDED
MOTORIZED CONVEYOR



NON-MOTORIZED REEL CONVEYOR



BUFFERING TABLE



MANUAL SIDE GUIDE



LABELING SYSTEM



SCISSOR LIFT (OPENED)



TRANSFER BELT

OPTIONS





TAURUS
CRACO

OPTIONS

ACCESORIES AND OPTIONAL DEVICES FOR STANDARD MODELS



C - WRAP



PNEUMATIC LIFTER CONVEYOR



AUTOMATIC CENTERING SIDE PRESS



FORK-LIFT REEL TABLE



HEAVY DUTY ROLLER CONVEYOR
* Motorized / *Non-Motorized

OPTIONS




TAURUS
CRACO

OPTIONS

ACCESORIES AND OPTIONAL DEVICES FOR STANDARD MODELS



DOUBLE FILM CARTRIDGE AND CUTTING + CLAMPING SYSTEM OPTION

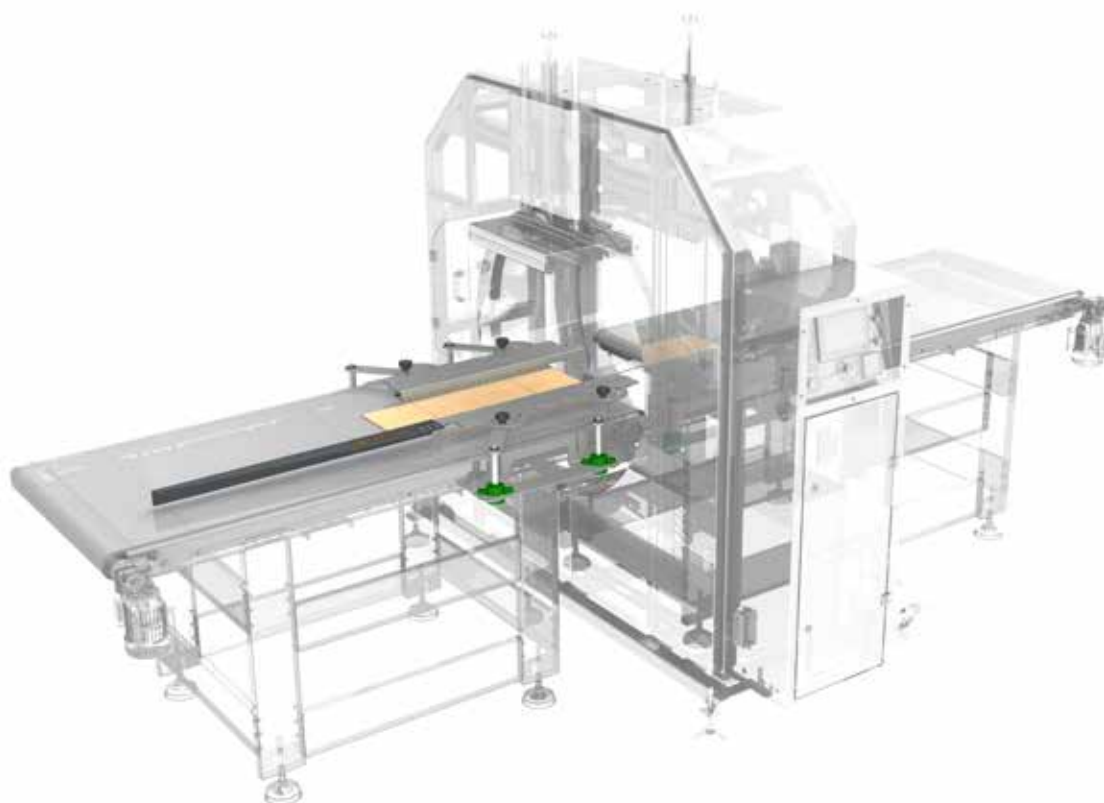

TRAY PACKING OPTION

OPTIONS







TAURUS
CRACO

DIMENSIONAL CAPACITY


GRAPHICS OF PRODUCT DIMENSIONS TO WRAP




450 SERIES

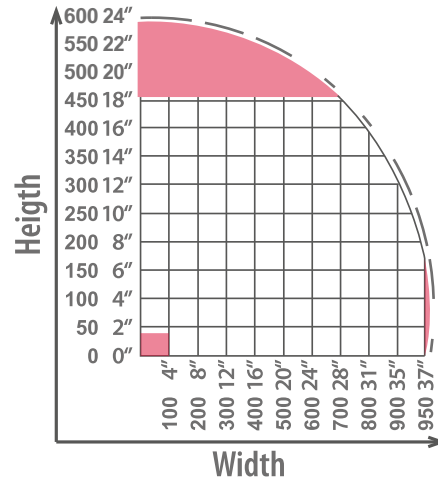

1000 SERIES

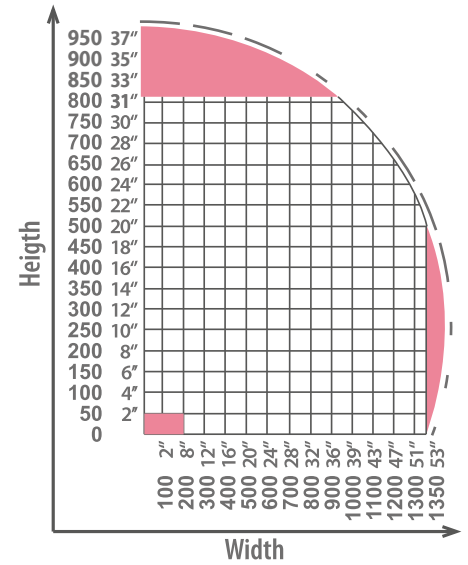


1500 SERIES

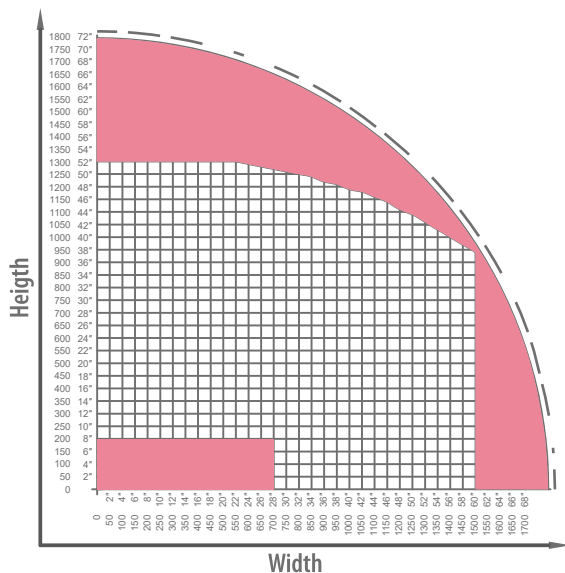

1800 SERIES BELT CONVEYOR

(Working height: 960 mm. – Belt width: 1300 mm)

Please contact our sales representatives for your requests for the wider belt from 1500 mm up to 1700 mm.

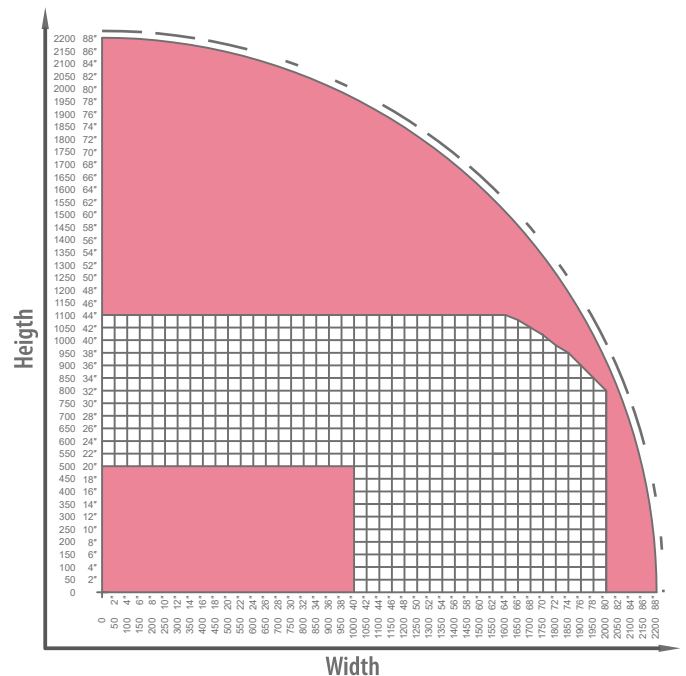

2200 SERIES ROLLER CONVEYOR

(Working height: 1245 mm. – Roller width: 1300 mm)

Please contact our sales representatives for your requests for the wider belt from 2000 mm up to 2200 mm.

UNSUITABLE DIMENSIONS