


1000 Series Specifications

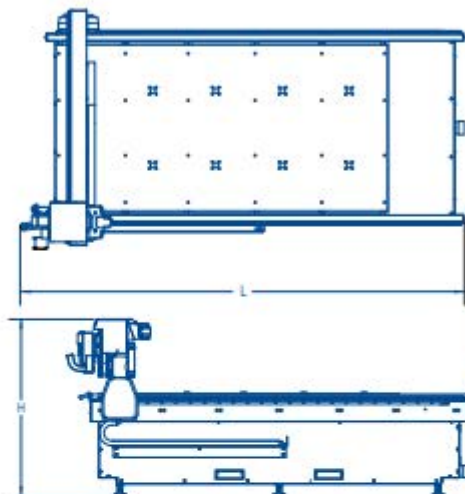


1000 Series Specs (inches)

- Z-Axis Clearance: 4.5
- Z-Axis Travel: 6"
- Repeatability: +/- .001"
- Cutting Speed: 800 ipm
- Rapid Traverse: 1000 ipm
- Drive System X and Y axis: Rack and Pinion
- Drive System Z axis: Lead Screw
- Standard Work Surface: Aluminum T-Plate Extrusion

Size Chart (inches)

MODEL	L	W	H	WORKING AREA	WEIGHT LBS.
1-103	155	71	54	50 x 100	2612
1-204	177	81	54	60 x 120	3157
1-205	199	81	54	60 x 144	3474
1-304	177	101	54	84 x 120	3828
1-305	199	101	54	84 x 144	4193
1-306	225	101	54	84 x 170	4988



1000 Series Specs (metric)

- Z-Axis Clearance: 114.3
- Z-Axis Travel: 152.3
- Repeatability: +/- .0254
- Cutting Speed: 800 ipm
- Rapid Traverse: 1000 ipm
- Drive System X and Y axis: Rack and Pinion
- Drive System Z axis: Lead Screw
- Standard Work Surface: Aluminum T-Plate Extrusion

Size Chart (metric)

MODEL	L	W	H	WORKING AREA	WEIGHT Kg
1-103	3937	1803	1371	1270 x 2540	1184
1-204	4495	2057	1371	1524 x 3048	1431
1-205	5054	2057	1371	1524 x 3657	1575
1-304	4495	2565	1371	2133 x 3048	1736
1-305	5054	2565	1371	2133 x 3657	1901
1-306	5715	2565	1371	2133 x 4318	2262

MultiCam

1000 Series