

Specifications						
Model	VG2-640	VG2-540	SG2-640	SG2-540	SG2-300	
Printing method	Piezo ink-jet method					
Media	Width	315 to 1,625 mm (12.4 to 64 in.)	275 to 1,371 mm (10.8 to 54 in.)	315 to 1,625 mm (12.4 to 64 in.)	275 to 1,371 mm (10.8 to 54 in.)	
	Thickness	Max. 1.0 mm (39 mil) with liner, for printing Max. 0.4 mm (16 mil) with liner and 0.22 mm (9 mil) without liner, for cutting				
	Roll outer diameter	Max. 210 mm (8.3 in.)				
	Roll weight	Max. 40 kg (88 lb.)	Max. 30 kg (66 lb.)	Max. 40 kg (88 lb.)	Max. 30 kg (66 lb.)	Max. 25 kg (55 lb.)
	Core diameter *1	76.2 mm (3 in.) or 50.8 mm (2 in.)				
Printing/cutting width *2	Max. 1,600 mm (63 in.)	Max. 1,346 mm (53 in.)	Max. 1,600 mm (63 in.)	Max. 1,346 mm (53 in.)	Max. 736 mm (29 in.)	
Ink	Type	TrueVIS INK 500 ml pouch (Only white 250 ml)				
	Colors	Eight colors (cyan, magenta, yellow, black, light black, orange, green, and white) Eight colors (cyan, magenta, yellow, black, light cyan, light magenta, light black, and white) Eight colors (cyan, magenta, yellow, black, light cyan, light magenta, light black, and orange) Seven colors (cyan, magenta, yellow, black, light black, orange, and green) Four colors (cyan, magenta, yellow, and black)		Four colors (cyan, magenta, yellow, and black)		
Printing resolution (dots per inch)	Max. 1,200 dpi					
Cutting speed	10 to 300 mm/s (0.4 to 11.8 in/s)					
Blade force *3	30 ~ 500 gf					
Blade	Type: Roland CAMM-1 series blade Offset: 0.000 to 1.500 mm (0.0 to 59.1 mil)					
Software resolution (when cutting)	0.025 mm/step (0.98 mil/step)					
Distance accuracy (when printing) *4 *5	Error of less than ±0.3% of distance traveled or ±0.3 mm (±11.8 mil), whichever is greater.					
Distance accuracy (when cutting) *4	Error of less than ±0.4% of distance traveled or ±0.3 mm (±11.8 mil), whichever is greater. When distance correction has been performed (when the setting for [CUTTING MENU] - [CALIBRATION] has been made): Error of less than ±0.2% of distance traveled or ±0.1 mm (±3.9 mil), whichever is greater.					
Repeatability (when cutting) *4 *6	±0.1 mm (±3.9 mil) or less					
Alignment accuracy for printing and cutting *4 *7	±0.5 mm (±19.7 mil) or less					
Alignment accuracy for printing and cutting when reloading media *4 *8	Error of less than ±0.5% of distance traveled, or ±3 mm (±0.2 in.), whichever is greater					
Media heating system *9	Print heater set temperature: 30 to 45°C (86 to 112°F) Dryer set temperature: 30 to 50°C (86 to 122°F)					
Connectivity	Ethernet (100BASE-TX/1000BASE-T, automatic switching)					
Power-saving function	Automatic sleep feature					
Power requirements	AC 100 to 120 V ±10%, 8.0 A, 50/60 Hz or AC 220 to 240 V ±10%, 4.1 A, 50/60 Hz				AC 100 to 120 V ±10%, 5.4 A, 50/60 Hz or AC 220 to 240 V ±10%, 2.7 A, 50/60 Hz	
Power consumption	During operation	Approx. 1,090 W			Approx. 710 W	
	Sleep mode	40 W				
Acoustic noise level	During operation: 63 dB (A) or less		During standby: 53 dB (A) or less			
Dimensions (with stand)	2,945 (W) × 730 (D) × 1,310 (H) mm (116 [W] × 28.8 [D] × 51.6 [H] in.)	2,685 (W) × 730 (D) × 1,310 (H) mm (105.8 [W] × 28.8 [D] × 51.6 [H] in.)	2,945 (W) × 730 (D) × 1,310 (H) mm (116 [W] × 28.8 [D] × 51.6 [H] in.)	2,685 (W) × 730 (D) × 1,310 (H) mm (105.8 [W] × 28.8 [D] × 51.6 [H] in.)	2,070 (W) × 730 (D) × 1,310 (H) mm (81.5 [W] × 28.8 [D] × 51.6 [H] in.)	
Weight (with stand)	204 kg (451.9 lb.)	188 kg (421 lb.)	197 kg (434 lb.)	180 kg (397 lb.)	147 kg (324 lb.)	
Environment	During operation	Temperature: 20 to 32°C (68 to 90°F), humidity: 35 to 80 % RH (no condensation)				
	Not operating	Temperature: 5 to 40°C (41 to 104°F), Humidity: 20 to 80 % RH (no condensation)				
Included items	Dedicated stands, power cord, media clamps, media holders, replacement blade for separating knife, manuals, etc.					

\*1 The media holders of this machine are designed to be used exclusively with media that has a paper tube (core) with an inner diameter of 3 inches. To use 2-inch media, the optional media flanges are required. \*2 The length of printing or cutting is subject to the limitations of the program. \*3 ~ 500 gf is the maximum instantaneous blade force. \*4 The blade force must be adjusted according to details such as the media thickness. \*5 Media type: Media specified by Roland DG Corporation. \*6 Temperature: 25°C (77°F), humidity: 50%RH. \*7 Roll media must be loaded correctly. \*8 Applicable when all pinch rollers that can be used with the media width are used. \*9 Side margins: 25 mm (1.0 in.) or more for both the left and right margins. \*10 Excluding expansion/contraction of the media. \*11 Not assured when the print heater or dryer is used. \*12 Assumes all correction and adjustment functions of the machine have been used properly. \*13 Print travel: 1 m (39.4 in.) \*14 \*15 \*16 \*17 \*18 \*19 \*20 \*21 \*22 \*23 \*24 \*25 \*26 \*27 \*28 \*29 \*30 \*31 \*32 \*33 \*34 \*35 \*36 \*37 \*38 \*39 \*40 \*41 \*42 \*43 \*44 \*45 \*46 \*47 \*48 \*49 \*50 \*51 \*52 \*53 \*54 \*55 \*56 \*57 \*58 \*59 \*60 \*61 \*62 \*63 \*64 \*65 \*66 \*67 \*68 \*69 \*70 \*71 \*72 \*73 \*74 \*75 \*76 \*77 \*78 \*79 \*80 \*81 \*82 \*83 \*84 \*85 \*86 \*87 \*88 \*89 \*90 \*91 \*92 \*93 \*94 \*95 \*96 \*97 \*98 \*99 \*100 \*101 \*102 \*103 \*104 \*105 \*106 \*107 \*108 \*109 \*110 \*111 \*112 \*113 \*114 \*115 \*116 \*117 \*118 \*119 \*120 \*121 \*122 \*123 \*124 \*125 \*126 \*127 \*128 \*129 \*130 \*131 \*132 \*133 \*134 \*135 \*136 \*137 \*138 \*139 \*140 \*141 \*142 \*143 \*144 \*145 \*146 \*147 \*148 \*149 \*150 \*151 \*152 \*153 \*154 \*155 \*156 \*157 \*158 \*159 \*160 \*161 \*162 \*163 \*164 \*165 \*166 \*167 \*168 \*169 \*170 \*171 \*172 \*173 \*174 \*175 \*176 \*177 \*178 \*179 \*180 \*181 \*182 \*183 \*184 \*185 \*186 \*187 \*188 \*189 \*190 \*191 \*192 \*193 \*194 \*195 \*196 \*197 \*198 \*199 \*200 \*201 \*202 \*203 \*204 \*205 \*206 \*207 \*208 \*209 \*210 \*211 \*212 \*213 \*214 \*215 \*216 \*217 \*218 \*219 \*220 \*221 \*222 \*223 \*224 \*225 \*226 \*227 \*228 \*229 \*230 \*231 \*232 \*233 \*234 \*235 \*236 \*237 \*238 \*239 \*240 \*241 \*242 \*243 \*244 \*245 \*246 \*247 \*248 \*249 \*250 \*251 \*252 \*253 \*254 \*255 \*256 \*257 \*258 \*259 \*260 \*261 \*262 \*263 \*264 \*265 \*266 \*267 \*268 \*269 \*270 \*271 \*272 \*273 \*274 \*275 \*276 \*277 \*278 \*279 \*280 \*281 \*282 \*283 \*284 \*285 \*286 \*287 \*288 \*289 \*290 \*291 \*292 \*293 \*294 \*295 \*296 \*297 \*298 \*299 \*300 \*301 \*302 \*303 \*304 \*305 \*306 \*307 \*308 \*309 \*310 \*311 \*312 \*313 \*314 \*315 \*316 \*317 \*318 \*319 \*320 \*321 \*322 \*323 \*324 \*325 \*326 \*327 \*328 \*329 \*330 \*331 \*332 \*333 \*334 \*335 \*336 \*337 \*338 \*339 \*340 \*341 \*342 \*343 \*344 \*345 \*346 \*347 \*348 \*349 \*350 \*351 \*352 \*353 \*354 \*355 \*356 \*357 \*358 \*359 \*360 \*361 \*362 \*363 \*364 \*365 \*366 \*367 \*368 \*369 \*370 \*371 \*372 \*373 \*374 \*375 \*376 \*377 \*378 \*379 \*380 \*381 \*382 \*383 \*384 \*385 \*386 \*387 \*388 \*389 \*390 \*391 \*392 \*393 \*394 \*395 \*396 \*397 \*398 \*399 \*400 \*401 \*402 \*403 \*404 \*405 \*406 \*407 \*408 \*409 \*410 \*411 \*412 \*413 \*414 \*415 \*416 \*417 \*418 \*419 \*420 \*421 \*422 \*423 \*424 \*425 \*426 \*427 \*428 \*429 \*430 \*431 \*432 \*433 \*434 \*435 \*436 \*437 \*438 \*439 \*440 \*441 \*442 \*443 \*444 \*445 \*446 \*447 \*448 \*449 \*450 \*451 \*452 \*453 \*454 \*455 \*456 \*457 \*458 \*459 \*460 \*461 \*462 \*463 \*464 \*465 \*466 \*467 \*468 \*469 \*470 \*471 \*472 \*473 \*474 \*475 \*476 \*477 \*478 \*479 \*480 \*481 \*482 \*483 \*484 \*485 \*486 \*487 \*488 \*489 \*490 \*491 \*492 \*493 \*494 \*495 \*496 \*497 \*498 \*499 \*500 \*501 \*502 \*503 \*504 \*505 \*506 \*507 \*508 \*509 \*510 \*511 \*512 \*513 \*514 \*515 \*516 \*517 \*518 \*519 \*520 \*521 \*522 \*523 \*524 \*525 \*526 \*527 \*528 \*529 \*530 \*531 \*532 \*533 \*534 \*535 \*536 \*537 \*538 \*539 \*540 \*541 \*542 \*543 \*544 \*545 \*546 \*547 \*548 \*549 \*550 \*551 \*552 \*553 \*554 \*555 \*556 \*557 \*558 \*559 \*560 \*561 \*562 \*563 \*564 \*565 \*566 \*567 \*568 \*569 \*570 \*571 \*572 \*573 \*574 \*575 \*576 \*577 \*578 \*579 \*580 \*581 \*582 \*583 \*584 \*585 \*586 \*587 \*588 \*589 \*590 \*591 \*592 \*593 \*594 \*595 \*596 \*597 \*598 \*599 \*600 \*601 \*602 \*603 \*604 \*605 \*606 \*607 \*608 \*609 \*610 \*611 \*612 \*613 \*614 \*615 \*616 \*617 \*618 \*619 \*620 \*621 \*622 \*623 \*624 \*625 \*626 \*627 \*628 \*629 \*630 \*631 \*632 \*633 \*634 \*635 \*636 \*637 \*638 \*639 \*640 \*641 \*642 \*643 \*644 \*645 \*646 \*647 \*648 \*649 \*650 \*651 \*652 \*653 \*654 \*655 \*656 \*657 \*658 \*659 \*660 \*661 \*662 \*663 \*664 \*665 \*666 \*667 \*668 \*669 \*670 \*671 \*672 \*673 \*674 \*675 \*676 \*677 \*678 \*679 \*680 \*681 \*682 \*683 \*684 \*685 \*686 \*687 \*688 \*689 \*690 \*691 \*692 \*693 \*694 \*695 \*696 \*697 \*698 \*699 \*700 \*701 \*702 \*703 \*704 \*705 \*706 \*707 \*708 \*709 \*710 \*711 \*712 \*713 \*714 \*715 \*716 \*717 \*718 \*719 \*720 \*721 \*722 \*723 \*724 \*725 \*726 \*727 \*728 \*729 \*730 \*731 \*732 \*733 \*734 \*735 \*736 \*737 \*738 \*739 \*740 \*741 \*742 \*743 \*744 \*745 \*746 \*747 \*748 \*749 \*750 \*751 \*752 \*753 \*754 \*755 \*756 \*757 \*758 \*759 \*760 \*761 \*762 \*763 \*764 \*765 \*766 \*767 \*768 \*769 \*770 \*771 \*772 \*773 \*774 \*775 \*776 \*777 \*778 \*779 \*780 \*781 \*782 \*783 \*784 \*785 \*786 \*787 \*788 \*789 \*790 \*791 \*792 \*793 \*794 \*795 \*796 \*797 \*798 \*799 \*800 \*801 \*802 \*803 \*804 \*805 \*806 \*807 \*808 \*809 \*810 \*811 \*812 \*813 \*814 \*815 \*816 \*817 \*818 \*819 \*820 \*821 \*822 \*823 \*824 \*825 \*826 \*827 \*828 \*829 \*830 \*831 \*832 \*833 \*834 \*835 \*836 \*837 \*838 \*839 \*840 \*841 \*842 \*843 \*844 \*845 \*846 \*847 \*848 \*849 \*850 \*851 \*852 \*853 \*854 \*855 \*856 \*857 \*858 \*859 \*860 \*861 \*862 \*863 \*864 \*865 \*866 \*867 \*868 \*869 \*870 \*871 \*872 \*873 \*874 \*875 \*876 \*877 \*878 \*879 \*880 \*881 \*882 \*883 \*884 \*885 \*886 \*887 \*888 \*889 \*890 \*891 \*892 \*893 \*894 \*895 \*896 \*897 \*898 \*899 \*900 \*901 \*902 \*903 \*904 \*905 \*906 \*907 \*908 \*909 \*910 \*911 \*912 \*913 \*914 \*915 \*916 \*917 \*918 \*919 \*920 \*921 \*922 \*923 \*924 \*925 \*926 \*927 \*928 \*929 \*930 \*931 \*932 \*933 \*934 \*935 \*936 \*937 \*938 \*939 \*940 \*941 \*942 \*943 \*944 \*945 \*946 \*947 \*948 \*949 \*950 \*951 \*952 \*953 \*954 \*955 \*956 \*957 \*958 \*959 \*960 \*961 \*962 \*963 \*964 \*965 \*966 \*967 \*968 \*969 \*970 \*971 \*972 \*973 \*974 \*975 \*976 \*977 \*978 \*979 \*980 \*981 \*982 \*983 \*984 \*985 \*986 \*987 \*988 \*989 \*990 \*991 \*992 \*993 \*994 \*995 \*996 \*997 \*998 \*999 \*1000

VersaWorks 6 System Requirements	
Operating system	Windows® 10 (32/64-bit), Windows® 8.1 (32/64-bit), Windows® 7 Ultimate / Professional (32/64-bit)
CPU	Intel® Core™2 Duo, 2.0 GHz or faster recommended
RAM	2 GB or more recommended
Video card and monitor	A resolution of 1,280 x 1,024 or more recommended
Free hard-disk space	40 GB or more recommended
Hard-disk file system	NTFS format
Optical drive	DVD-ROM drive
Other	Internet connection recommended


Options		
TrueVIS INK	TR2-CY	Cyan, 500 ml
	TR2-MG	Magenta, 500 ml
	TR2-YE	Yellow, 500 ml
	TR2-BK	Black, 500 ml
	TR2-LC	Light cyan, 500 ml
	TR2-LM	Light magenta, 500 ml
	TR2-LK	Light black, 500 ml
	TR2-OR	Orange, 500 ml
	TR2-GR	Green, 500 ml
	TR2-WH	White, 250 ml
Cleaning liquid	TR2-CL	Cleaning liquid, 500 ml
	ZEC-U5032	For sign vinyl in general, 2pcs.
Blades	ZEC-U5025	For thick, reflective and fluorescent vinyl, as well as sign vinyl in general, 5pcs.
	Blade holders	XD-CH2
XD-CH3		Blade holder with blade extension adjuster, made of resin

Options	
Automated take-up system	
	TU4-64 [For VG2-640, SG2-640] TU4-54 [For VG2-540, SG2-540] TU4-30 [For SG2-300] * Rolls up to 40 kg (88.2 lb.)
Heater and blower	
	DU2-64 [For VG2-640] Power requirements AC 100 to 120 V ±10%, 5.5 A, 50/60 Hz AC 220 to 240 V ±10%, 3 A, 50/60 Hz DU2-54 [For VG2-540] Power requirements AC 100 to 120 V ±10%, 5 A, 50/60 Hz AC 220 to 240 V ±10%, 2.6 A, 50/60 Hz
*It is recommended to use heater and blower especially for printing with white.	

**About White Ink** Due to the nature of white ink, the pigment in this ink will settle in the cartridge and ink flow system, requiring you to shake the cartridge before each use. Outdoor durability is three years for CMYKLcLmLkOrGr inks, and one year for white ink, depending on the media used.

Roland DG reserves the right to make changes in specifications, materials or accessories without notice. Your actual output may vary. For optimum output quality, periodic maintenance to critical components may be required. Please contact your Roland DG dealer for details. No guarantee or warranty is implied other than expressly stated. Roland DG shall not be liable for any incidental or consequential damages, whether foreseeable or not, caused by defects in such products. PANTONE® is the property of Pantone LLC. All other trademarks are the property of their respective owners. Reproduction or use of copyrighted material is governed by local, national, and international laws. Customers are responsible for observing all applicable laws and are liable for any infringement. Roland DG Corporation has licensed the MMP technology from the TPL Group.

# THE POWER TO EXCITE

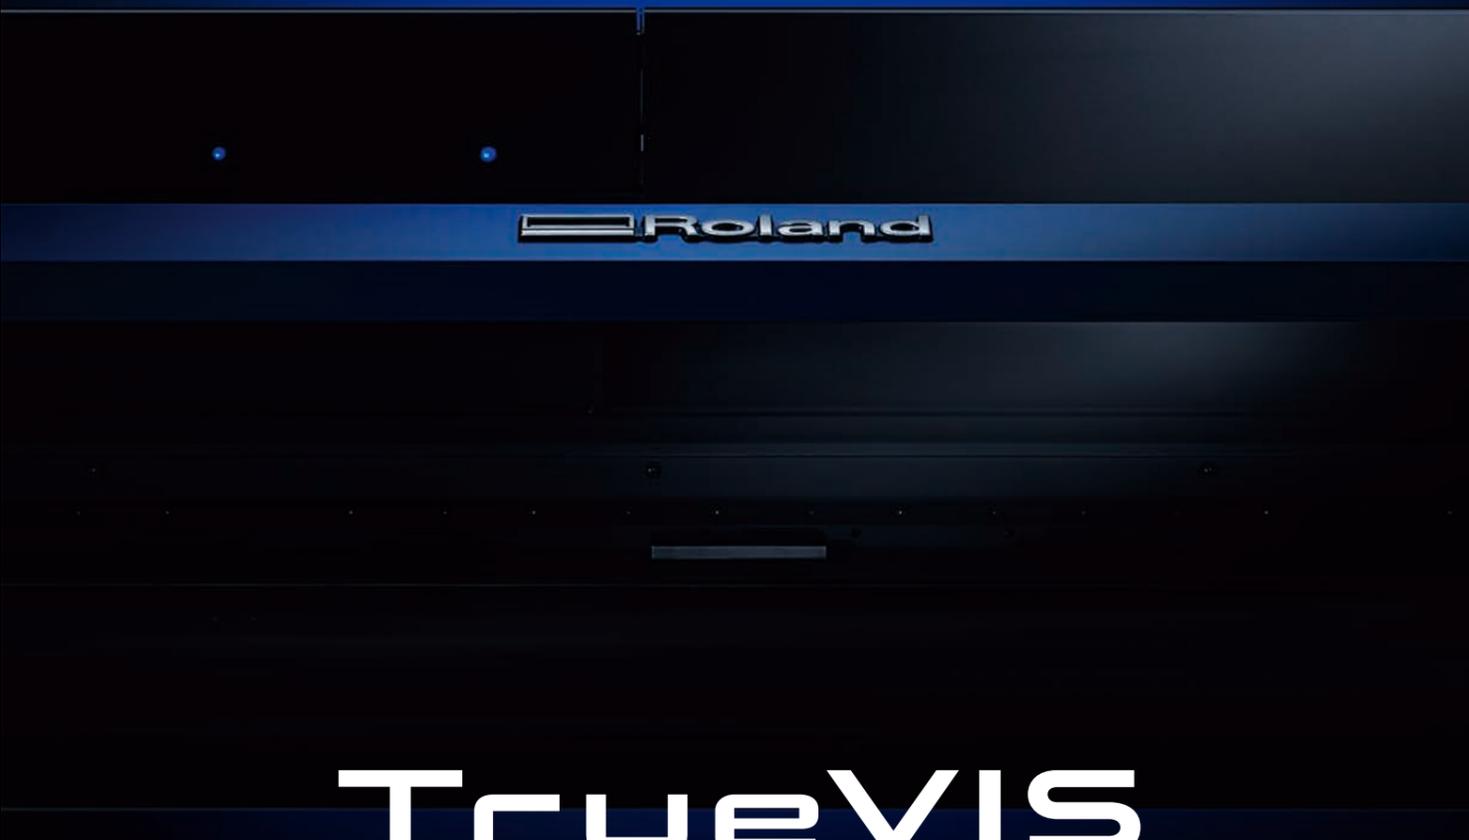

# TrueVIS

VG2 Series / SG2 Series



# Explore Uncharted Colors

## TrueVIS VG2 Series

- 8 Colors : CMYKLGOrGrWh
- 7 Colors : CMYKLGOrGr
- 8 Colors : CMYKLcLmLkOr
- 8 Colors : CMYKLcLmLkWh
- 4 Colors : Dual CMYK



VG2-540

VG2-640

## TrueVIS SG2 Series

- 4 Colors : CMYK



SG2-300

SG2-540

SG2-640

The TrueVIS VG2/SG2 series was designed to inspire creative expression with outstanding color and to grow your business. The vibrant color of new TR2 inks and the new True Rich Color preset combine to maximize the potential performance of the hardware and inks and enable you to explore uncharted colors for unprecedented gamut expansion, superior color accuracy, and the unique ability to achieve both vividness and natural reproduction at the same time. Only the TrueVIS VG2/SG2 series offer this extraordinary Power to Excite both hearts and minds.

# Introducing TrueVIS VG2 and SG2 Printer/Cutters

**TrueVIS**  
VG2 Series / SG2 Series




## Outstanding Color

### New TrueVIS TR2 ink for Vibrant Color

In addition to CMYKLcLmLk and White, new TR2 ink is now available in Orange and Green to further increase color gamut. Orange in general adds high visibility and impact to printed graphics and offers a warm and welcoming glow with positive emotions, while green adds natural comfort and relaxed confidence for smooth communications. To maximize the effect of these new color inks, a new Multi-Process Color Function has been developed to enable using Orange and Green inks as process colors for richer visual expression.

### Enhance your Business with "True Rich Color"

In order to take full advantage of the VG2/SG2 series' superior color reproduction capability and the wider color gamut provided by new TR2 ink, we developed a True Rich Color preset. Now vibrant color can be combined with neutral grays, smooth gradations and natural skin tones to create stunning graphics. This pioneering print quality is unequalled for durable graphics.

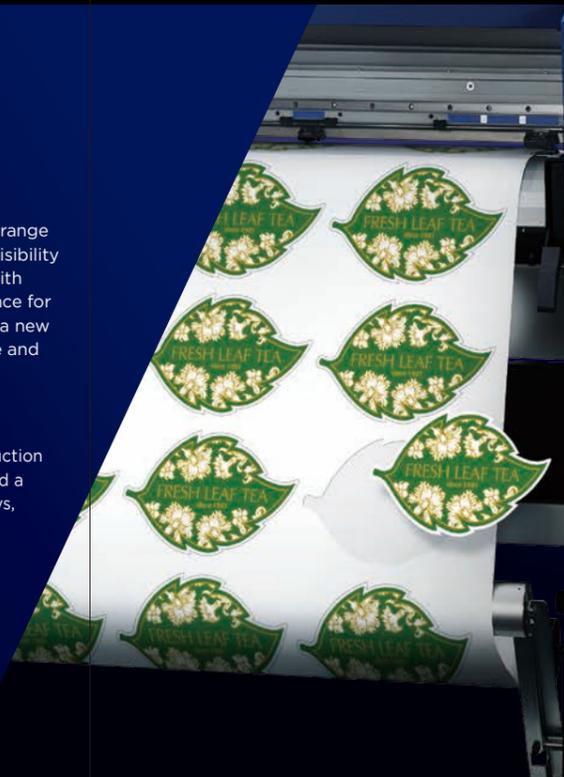


## Highly Reliable Print & Cut Production

### Automated Long-run Decals/Labels Production

When multiple copies of stickers, decals, and labels are produced, the shorter the job length is, the higher print & cut accuracy becomes. Using the Multiple Print function allows the printer to automatically conduct highly accurate printing and cutting for a group of labels several times without the need of using crop marks. The combination of a new precision media take-up system with highly accurate print & cut functionality enables the production of longer-run unattended jobs.

#### Lengthy Print & Cut Jobs with Crop Marks


Print all copies and cut them afterwards.

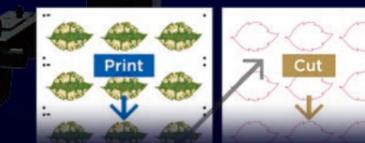

It takes longer to read crop marks.

#### New "Multiple Print" Function

Continuous Print and Cut per Shorter Distances.

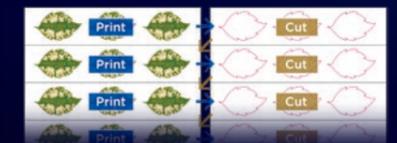

It results in SHORTER PRODUCTION TIME

### Eliminate Trimming with Perforated Cut

The improved cutting control technology of the VG2/SG2 series introduces a precision Perforated Cut function for producing die-cut, ready-made labels/decals without the need of a post-trimming process. Since the perforated cut can also be applied to contour cutting, it can produce unique, custom-shaped stickers ready to be shipped. This eliminates the post trimming process and supports short turn-around jobs.



## Reliability, Durability and Safety

The VG2/SG2 series with new TR2 ink is certified for long-lasting results by 3M™ MCS™ Warranty, providing your customers with the assurance of the quality and reliability of their graphics. It is also certified by the Avery Dennison ICS Performance Guarantee which provides protection for up to 4 years outdoors and up to 7 years indoor. Graphics produced with TR2 inks are Greenguard Gold certified to be safe when used indoors at schools or hospitals.



3M  
Performance  
Guarantee




PRODUCT  
CERTIFIED FOR  
LOW CHEMICAL  
EMISSIONS:  
UL.COM/CGG  
UL 2818

## Exceptional Performance to Handle Short Turn-Around Orders

### FlexFire Printhead

Roland DG FlexFire printheads maximize printing performance so that even the highest speed setting delivers neutral grays, vivid colors, and smooth skin tones.

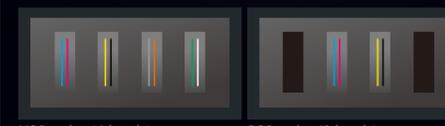

VG2 series (4 heads)

SG2 series (2 heads)



### Two Take-up Modes

A new take-up unit supports two modes according to the type of media chosen, securing take-up stability for smooth post processing.



### Nozzle-Mask Function

A Nozzle Mask function allows you to continue printing even when a nozzle is clogged with ink.



### New Media Clamp

A new media clamp allows sheet cutting without removal.

## VersaWorks 6 to Accelerate your Printing Business

The new VersaWorks 6 bundled RIP software is designed to simplify operation while maximizing the power of your VG2/SG2 series and other Roland DG devices. A Harlequin RIP dual-core engine with support for PDF 2.0 and native 64-bit processing provides accurate rendering of PDFs with shadows and transparencies.

- Five print queues and the ability to save and store unlimited queue settings
- Special Color Plate Generation lets you auto-generate White ink layers
- Newly developed Job Assistant function can layout and edit required cutting lines in VersaWorks 6
- Built-in Pantone® and Roland Color spot color libraries
- Color matching function to easily match colors between the VG2 series as well as TrueVIS series VF2-640 printers when the same ink types are used. Also allows easy correction of color differences caused by aging printers or replacement print heads as well.

