



Maintenance | Ink Filter Counts

Ink Volume Filtered By Color:

	Black	68.53 L
	Cyan	70.07 L
	Magenta	105.65 L
	Yellow	115.63 L
	Lt. Cyan / White 1	51.94 L
	Lt. Magenta / White 2	63.82 L



Proceed



General Settings

Software Version:	AK B.04.08-r187 1
Serial Number:	[REDACTED]
Vacuum Pressure:	5.35" H ₂ O
Date & Time:	2025-12-29 12:14
UV Lamp Hours:	
User-end Lamp:	452 Hours
Service-end Lamp:	452 Hours

Page 1 of 9




Back



Previous



Next

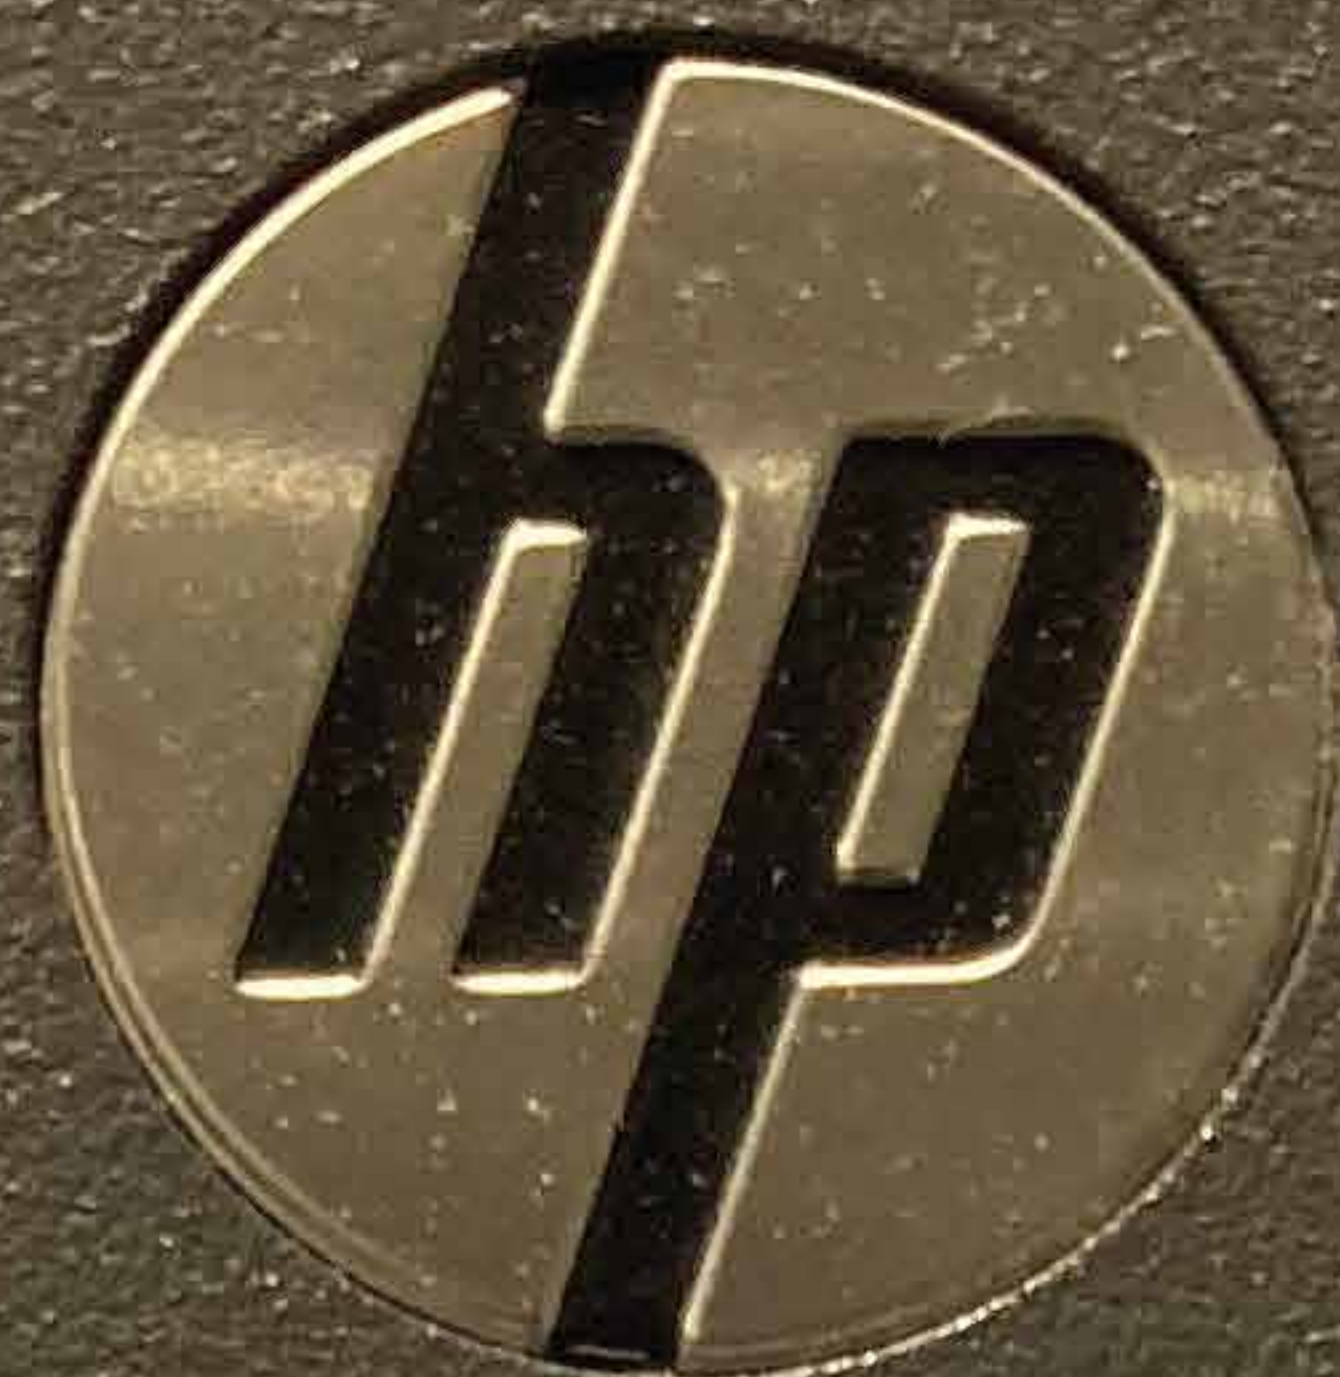

Hardware Information

Total RAM:	1952 MB
I/O Board Revision:	60233-A 15.6 (5.38)
I/O Board ID:	000015DB6061
Headboard Revision:	60232-A (4.63)
Headboard ID:	000000DDFA91
Comm Stats:	U: 0 R: 4
Image Sensor Rev:	4
LCD Part Number.Revision:	FMW0005.x20
OHS Revision:	3
UV Power Supply:	DAC0_AD0_S600
Motherboard Revision:	AIMB-584
Hard Drive Revision:	S
Network Speed:	1000 Mb/Sec
Network Status:	Connected

Page 2 of 9



Back



Previous



Next



Printing Page Settings

AutoSet Summary:	Basic
Print Position:	Flush Left
Eject Direction:	Output Eject
Space After Internal Prints:	0.25 in.
Measure Media:	All, Standard
Use Ionizer Bar:	Yes
Use Thickness Sensor:	Yes
Head Height off Media:	0.080 in.
Print White Space:	Off
Quality Check:	On - Unattended
Increase UV Lamp Power:	No
Unidirectional Print Direction:	User to Service
Use Fast Print Speed:	Yes

Page 3 of 9



Back



Previous



Next



Ink Page Settings

Purge Type:	Performance
Low Ink Warning:	0.10 L
Auto Purge & Wipe Interval:	2
White Ink Upgrade Installed:	Yes
Idle Spit While Printing:	No

Page 4 of 9



Back



Previous



Next



System Page Settings

Localization

Units of Measure:	English
Time Format:	24 Hour
Date Format:	YYYY-MM-DD
Vac Pressure Units:	in. of H ₂ O
Language:	English
Sleep Wait Time:	5 Minutes
UV Lamps Idle Time:	5 Minutes
Attention Sorting:	Chronologically
Auto Maintenance Time:	06:00
Expert/Novice Messages:	Expert
Printer Name:	HP Scitex FB750
Network:	Automatic (DHCP)

Page 5 of 9



Back



Previous



Next



The Open Source Software is composed of individual software components, each of which has its own copyright and its own applicable license conditions. Copyrights to the Open Source Software are held by the copyright holders.

Open source acknowledgements:

KISS FFT - Copyright © 2003-2004, Mark Borgerding

Expat XML Parser - Copyright © 1998, 1999, 2000

Thai Open Source Software Center Ltd.

zLib - Copyright © 1995-2010 Jean-loup Gailly and Mark Adler



Back



Previous



Next



On-Head Reservoir Status:

	Ink	Air	Threshold	Status
 Black	217	195	200	Ink
 Cyan	231	198	203	Ink
 Magenta	220	194	199	Ink
 Yellow	216	195	200	Ink
 Light Cyan	220	192	197	Ink
 Light Magenta	215	198	203	Ink

* Bad readings detected

Page 7 of 9



Back



Previous



Next



Voltage Adjustments:

	Low	Percent	Offset	High
 Black	14.90v	110%	0.00v	28.00v
 Cyan	14.90v	110%	0.00v	28.00v
 Magenta	14.90v	110%	0.00v	28.00v
 Yellow	14.90v	110%	0.00v	28.00v
 Light Cyan	14.90v	110%	0.00v	28.00v
 Light Magenta	14.90v	110%	0.00v	28.00v

Page 8 of 9



Back



Previous



Next



Head Serial Numbers:

Head	Serial Number	Head	Serial Number
1	117020096	7	117020116
2	117020103	8	117020105
3	120090392	9	120080121
4	123050050	10	121090022
5	120060124	11	121090028
6	117020101	12	123040412

Page 9 of 9



Back



Previous



Next



System Usage Log (Page 1)

	Internal	Server	Ink Filter	Serviced Ink
 Black	275 mL	24.3 L	68.5 L	44.3 L
 Cyan	224 mL	28.9 L	70.1 L	41.5 L
 Magenta	529 mL	48.9 L	105.7 L	57.0 L
 Yellow	155 mL	45.8 L	115.6 L	70.6 L
 LightCyan	475 mL	10.3 L	51.9 L	40.8 L
 LightMagenta	195 mL	15.1 L	63.8 L	48.2 L
White	0 mL	62 mL	913 mL	850.2 mL

Time Running: 3075 Days 4 Hr 52 Min
Time Printing: 66 Days 15 Hr 33 Min

Page 10 of 11



Back



Previous



Next



System Usage Log (Page 2)

Print Mode	Sq. Feet
Photo Plus	19037.4
Photo	75722.6
Indoor Signage Plus	27538.3
Indoor Signage	1422.2
Outdoor Signage Plus	75210.2
Outdoor Signage	1233.4
Express	16.7
Billboard	0.0
Internal *	3062.2

* Total for all internal jobs

Page 11 of 11



Back



Previous



Next