

NOZZLE LIP VERT. ADJ. REG. PLATE ADJ. WITH WORM & GEAR

(1) 20 DIA. WINDOW (2) 12 DIA. WINDOWS

TOTAL HEAD GLASS GAGE

PROVISION FOR FUTURE AUXILIARY SLICE

MAIN BAFFLE ADJ. 1/2 MIN. - 1/2 MAX. AIR MOTOR ON DE. SIDE

(2) ROTATING FRESH WATER SHOWERS (BRASS)

(2) 1/2 DIA. WINDOWS TEND. SIDE ONLY

LIQUID LEVEL GLASS GAGE

WALKWAY, RAILING & LADDER MICRO-NOZZLE ADJ. RODS ON AX. & CTES. ACROSS MACH.

14 DIA. DIST. ROLL MOUNTED IN ADJ. BEGS. 0' TO 1' VERT. ADJ. 3/4 HP. V.S. 1/2 HP. DRIVE. 440-3-60 40.5% OPEN AREA

1/16" CLEARANCE

1/2 I.P.S. BLEED OFF

ALTERNATE NO. DIST. ROLL POSITION

PROVISION FOR FUTURE 2 DIA. DIST. ROLL

2 DIA. DIST. ROLL - 40.7% OPEN AREA - ECCENTRIC MOUNTED FOR FUTURE WIDENING OF PASS - 14 MAX. 2 DIA. DIST. ROLL - 40.7% OPEN AREA.

2 DIA. CLEAN OUT TEND. SIDE ONLY (6) 8 DIA. ENTRY PORTS ON 10 X 24 SLOT

LOOSE FLANGE FOR FIELD WELD BY CUSTOMER TO MATCH EXISTING FLANGE PER CUSTOMER DWG. BIC-5230

This drawing is the exclusive property of Valley Iron Works Corporation and is to be used only for the EXPRESS purpose for which it is loaned. It is CONFIDENTIAL and is not to be reproduced or copied, in whole or in part, by any means, without the prior written consent of Valley Iron Works Corporation. If not served its purpose or upon request.


3 P.M.

50 SHANK WITH DITCHET WRENCH. WORM & GEAR GIVES 2 1/2" ON THE FLAT (APRON ADJ.)

15 DIA. CLEAN OUT TEND. SIDE ONLY (2) 6 DIA. HYD. OPERATED PUMP VALVES. 3/8 I.P.S. CONNECTIONS 40" TO 80" PRESSURE

REG. PLATE ADJ. (NOZZLE HEEL) NOZZLE BLADE ADJ.

SECTION THRU INLET SCALE: 3" = 1'-0"

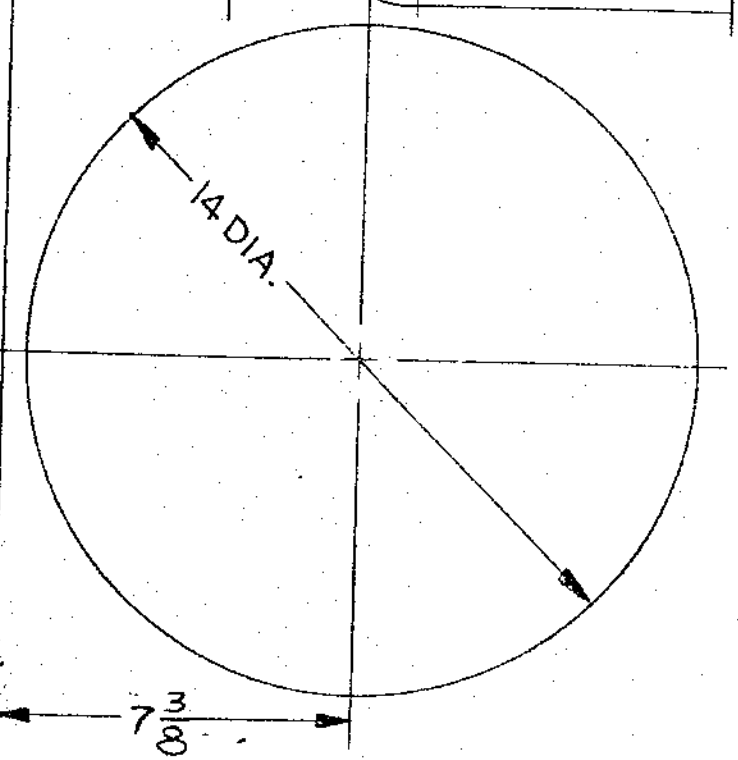

PLAN VIEW OF PEDESTALS & PUMP VALVES - 1A-14990-E

REVISIONS			
NO.	DESCRIPTION	DATE	BY
1	3 1/2 WAS 3 3/4 (24) WAS 24 1/2	11/7/61	R.B.
2	4 1/4 WAS 3 3/4	11/7/61	R.B.
3			
4			
5			
6			
7			
8			
9			
10			

VALLEY IRON WORKS CO.	DATE	11/21/61
APPLETON, WISCONSIN	SCALE	1 1/2" = 1'-0"
	CHECKED	John S. S.
	DATE	11/20/61