








We reserve all rights in this document and in the information contained herein. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without express authority in writing from ABB. All rights reserved. © Copyright 2025 ABB

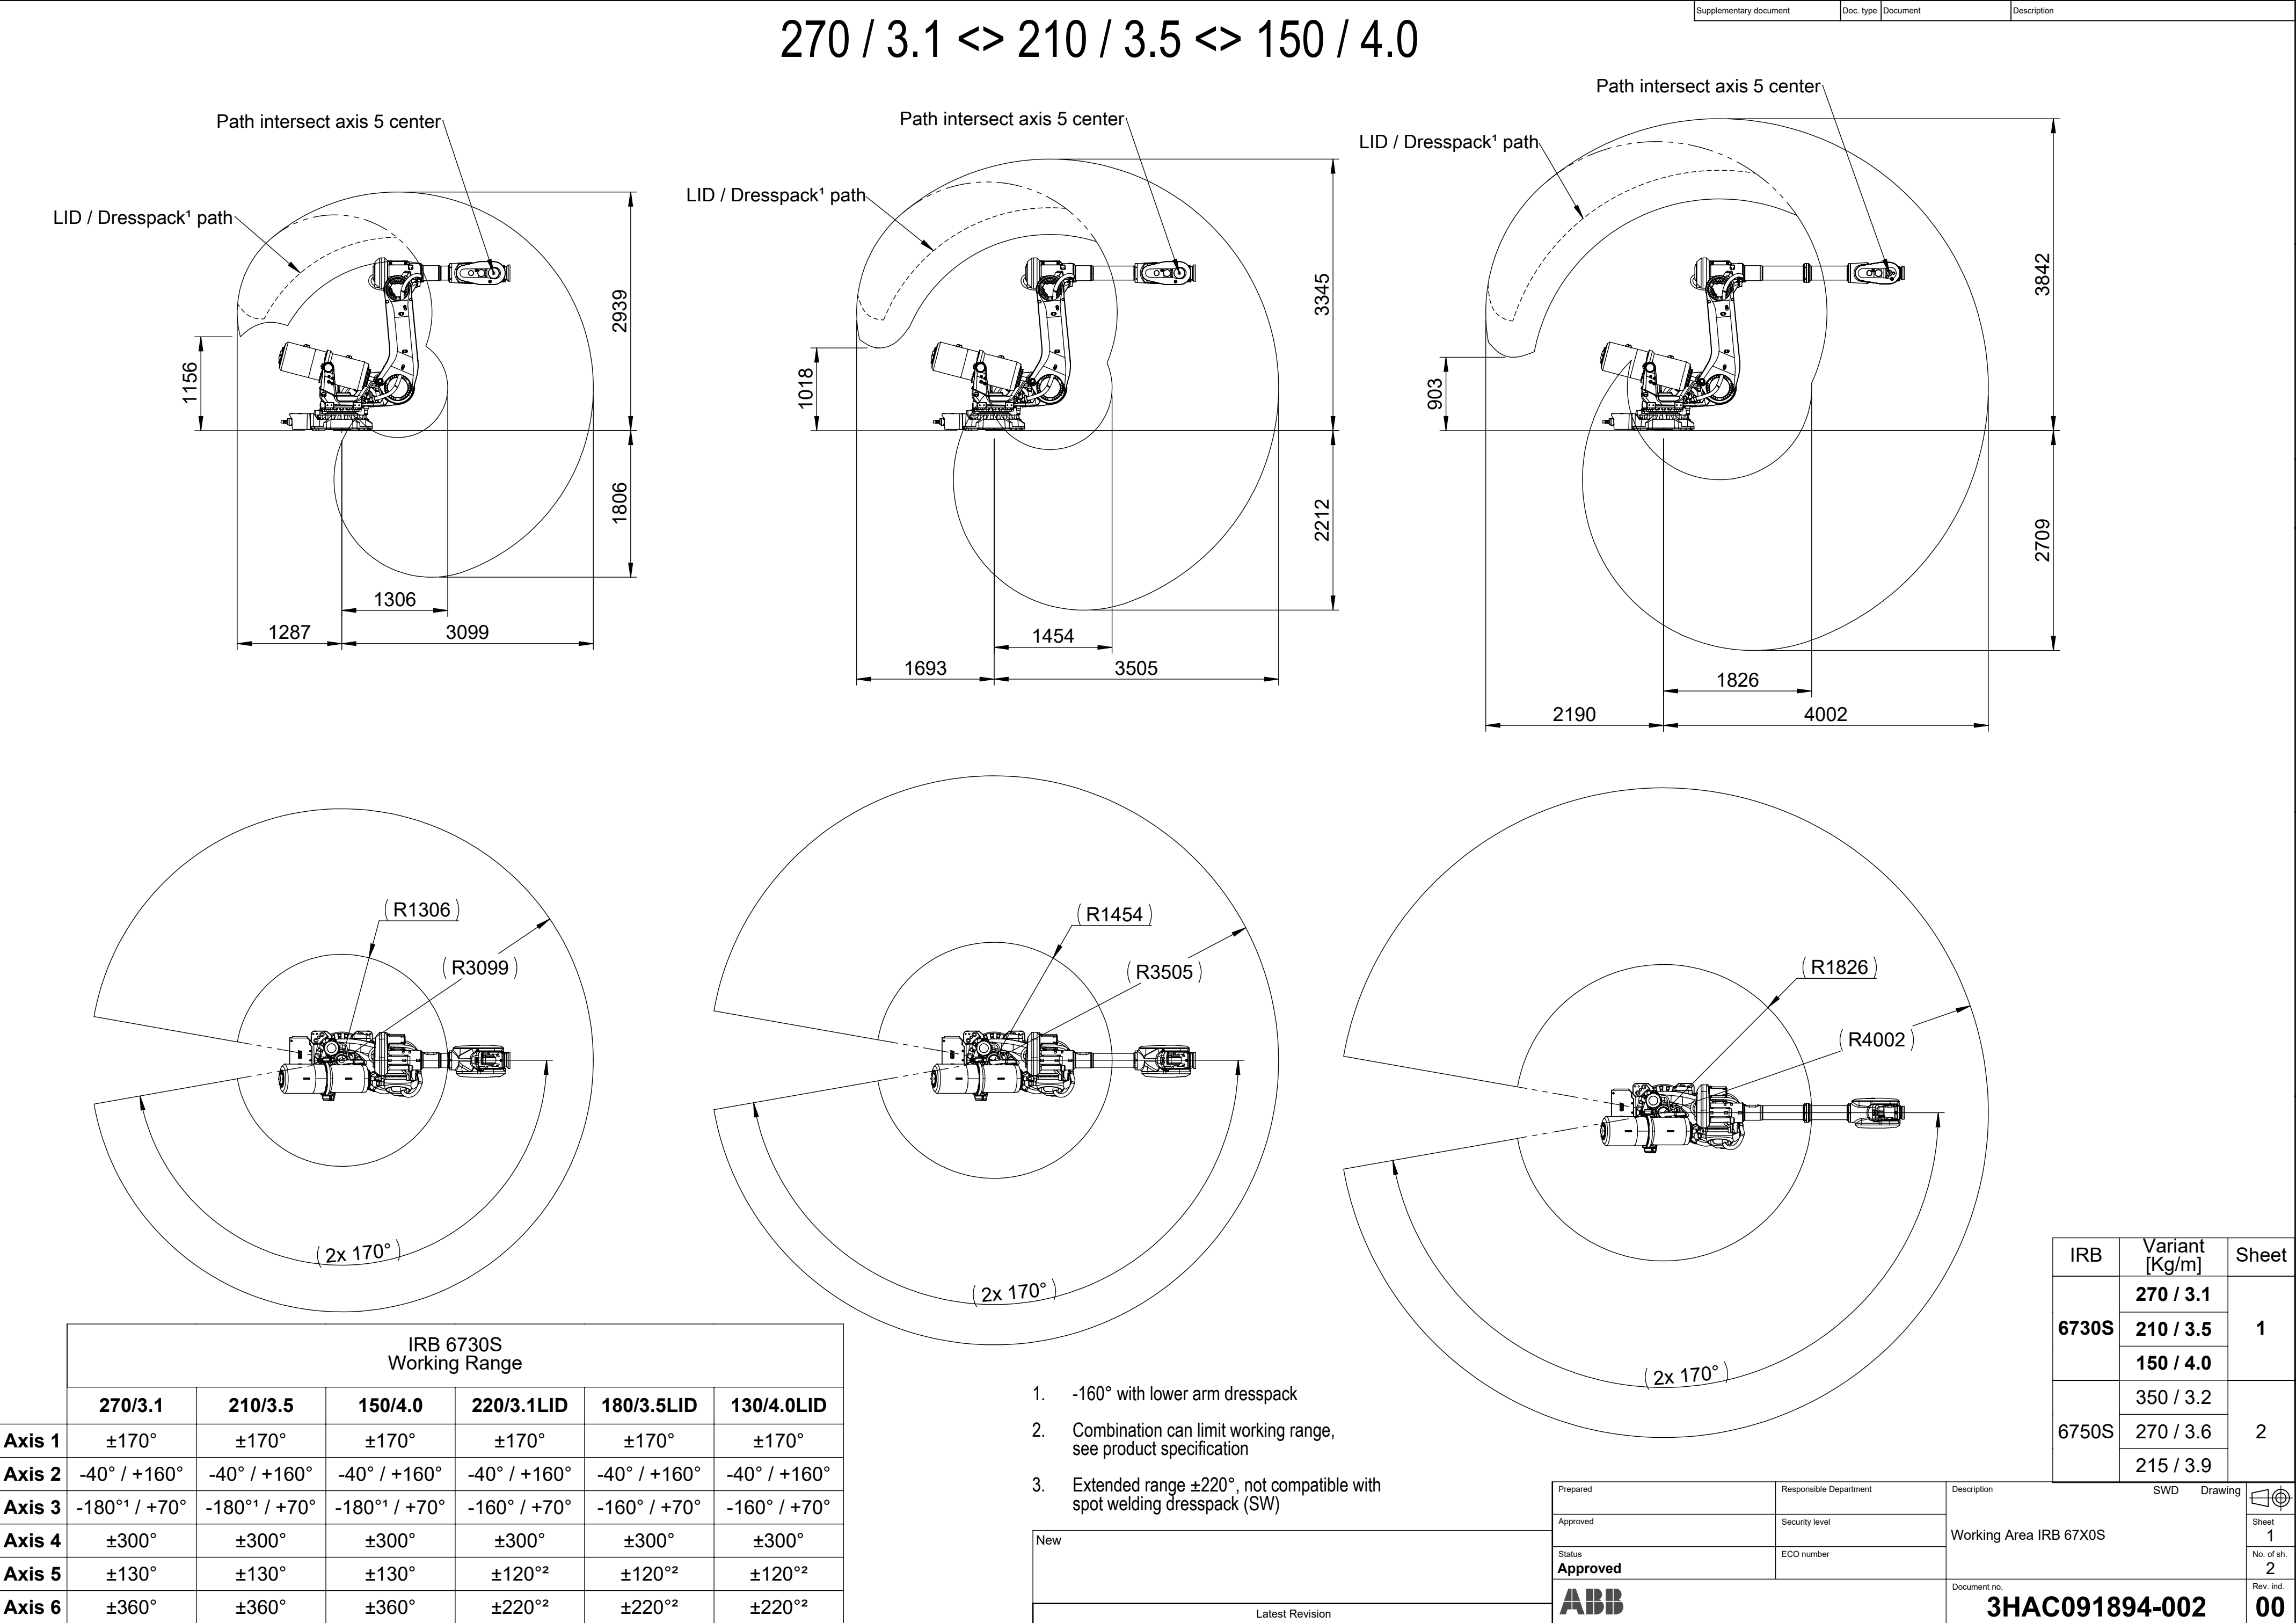

We reserve all rights in this document and in the information contained herein. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without prior written permission from ABB. All rights reserved. © Copyright 2025 ABB

350 / 3.2 <> 270 / 3.6 <> 215 / 3.9

Supplementary document	Doc. type	Document	Description
------------------------	-----------	----------	-------------

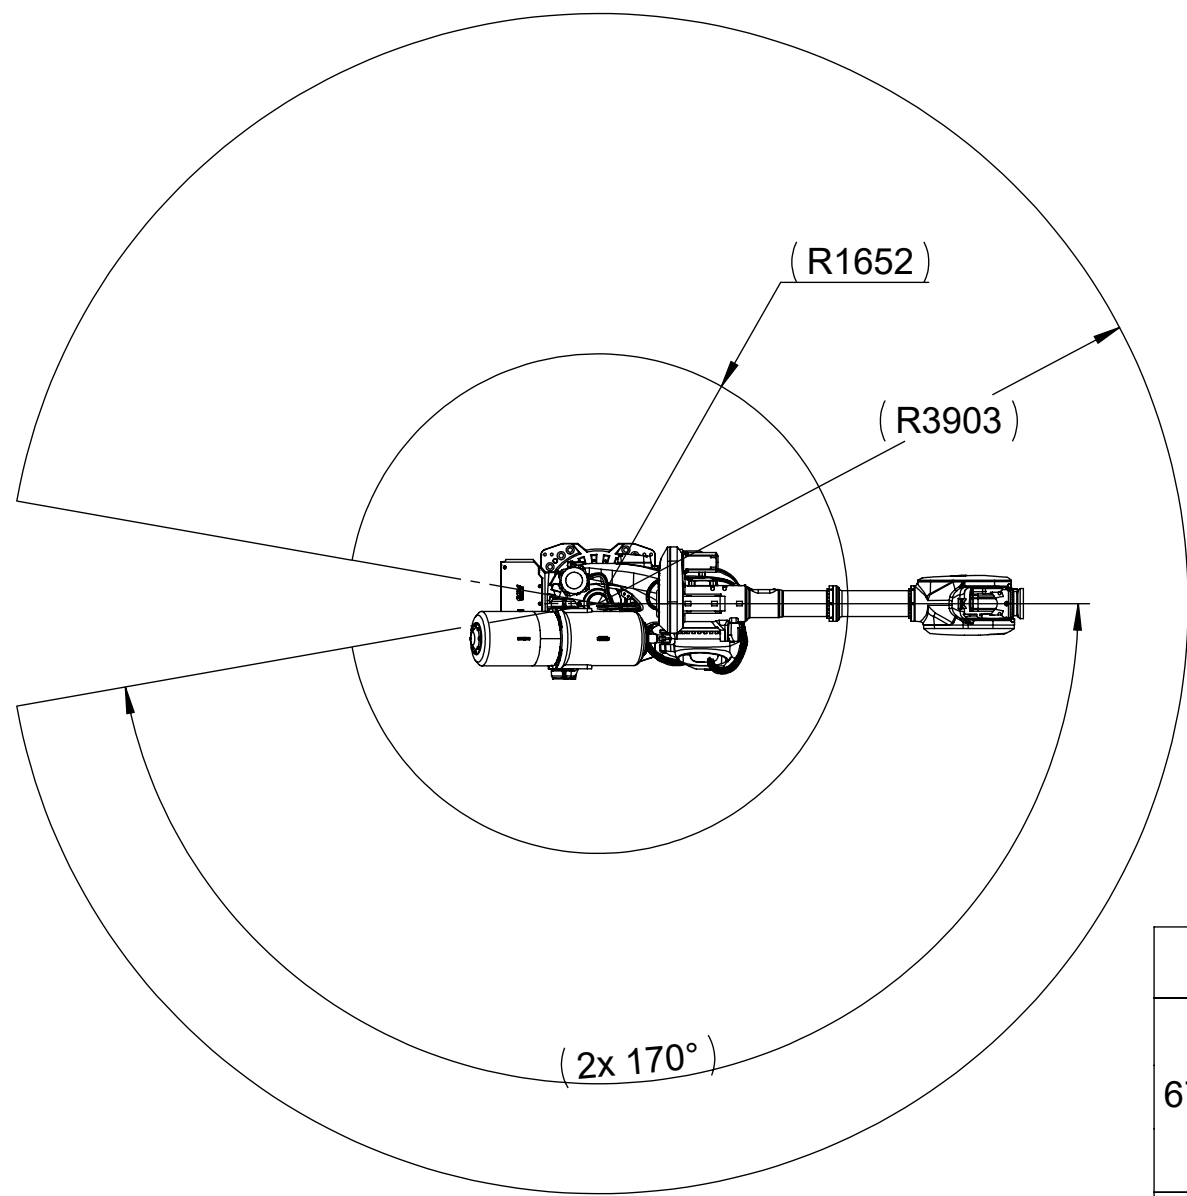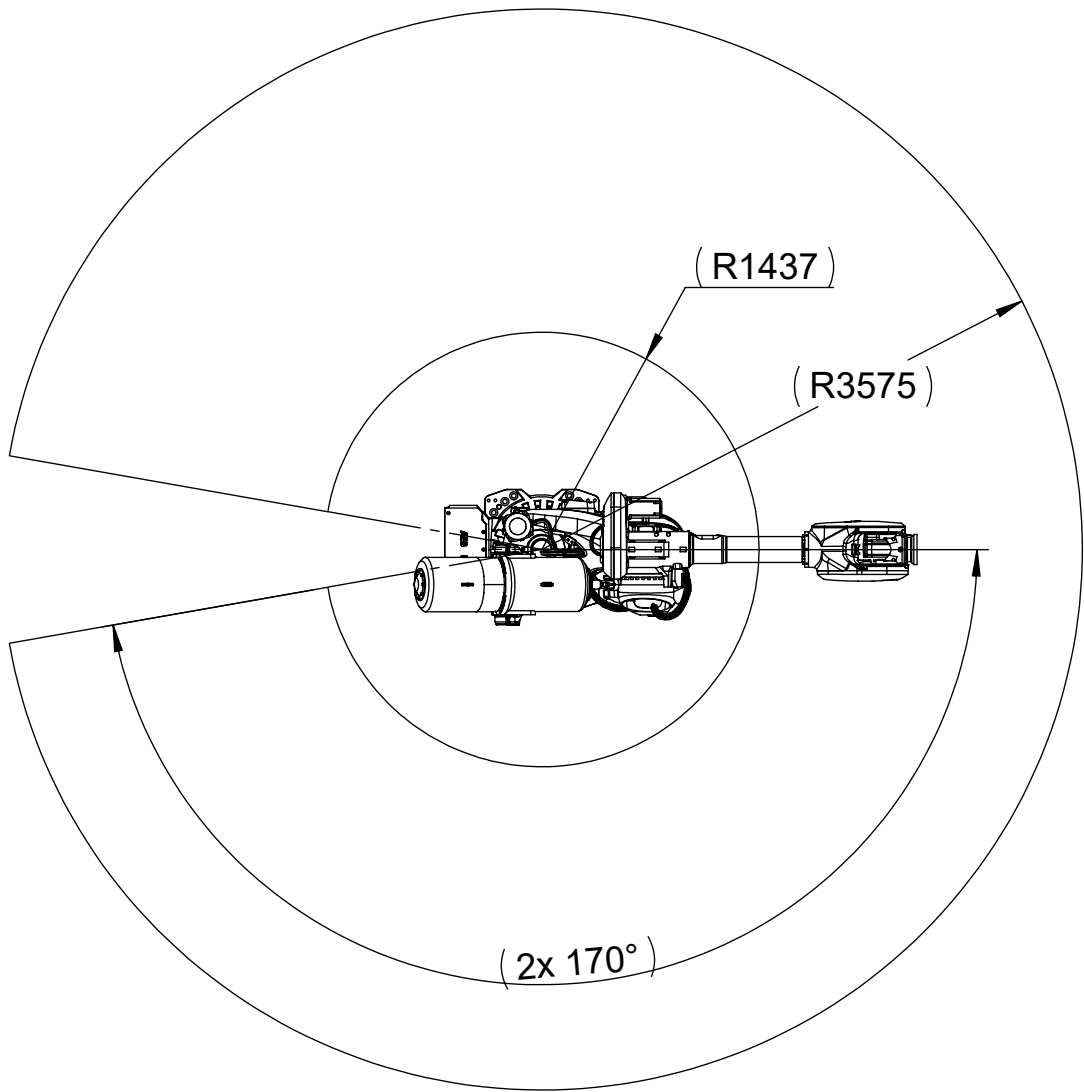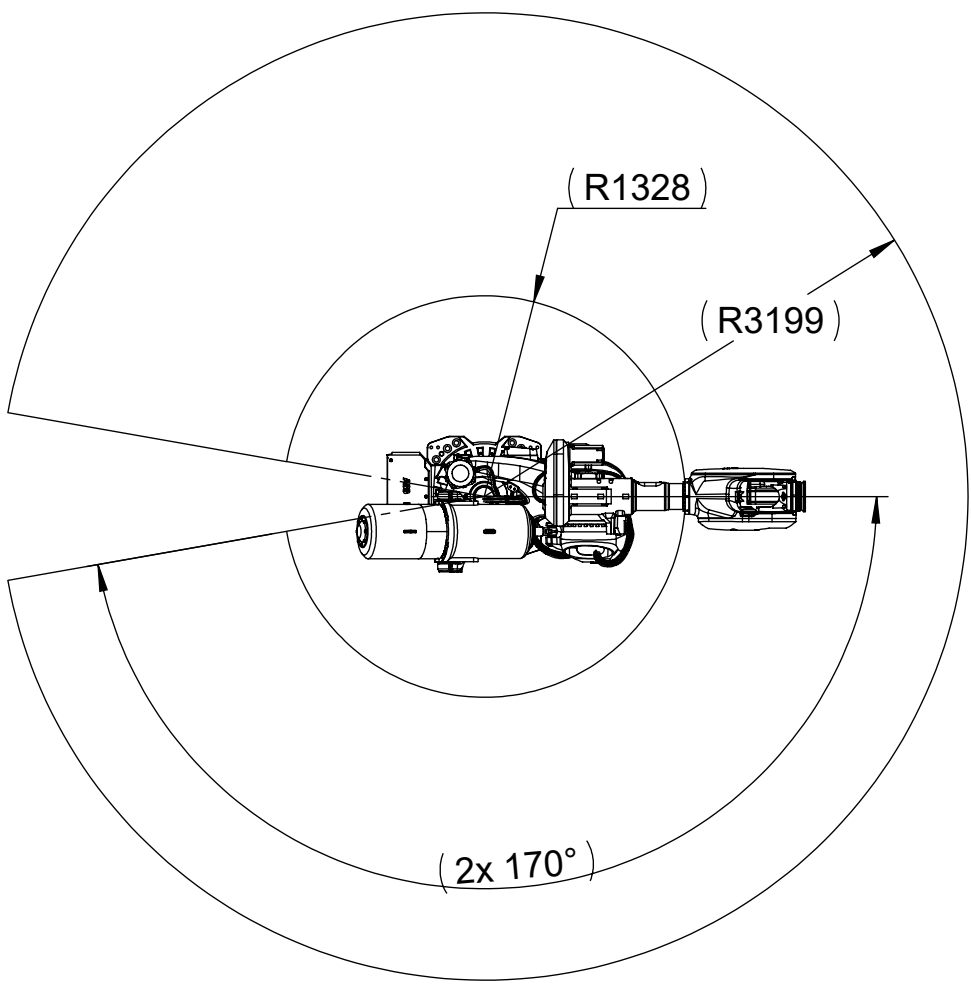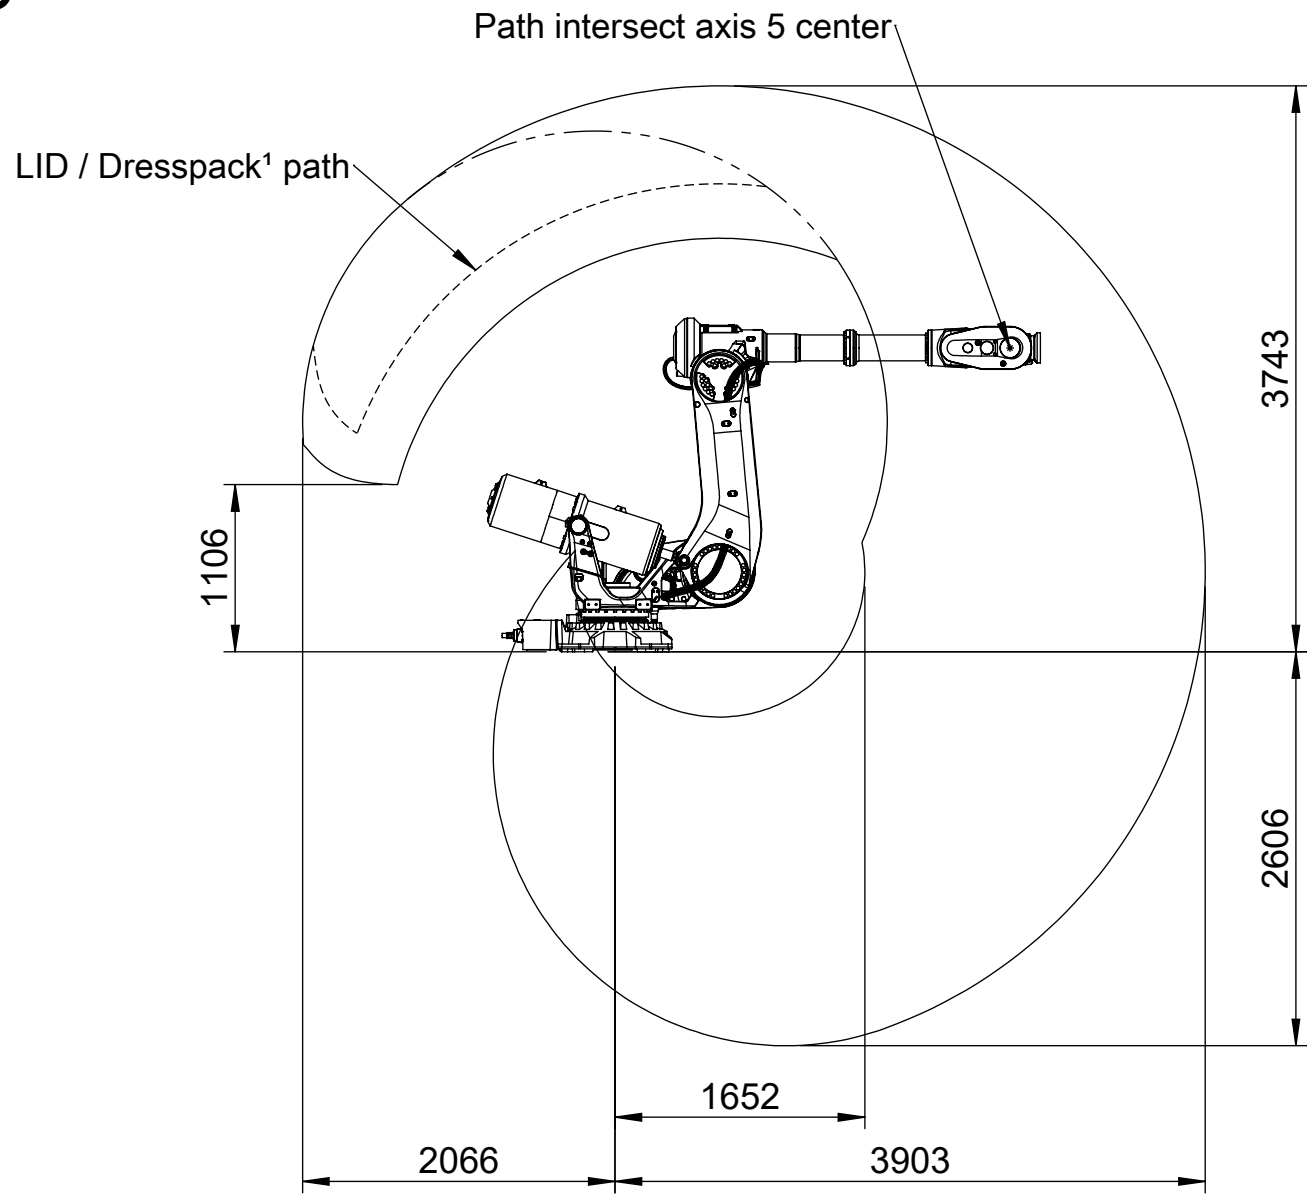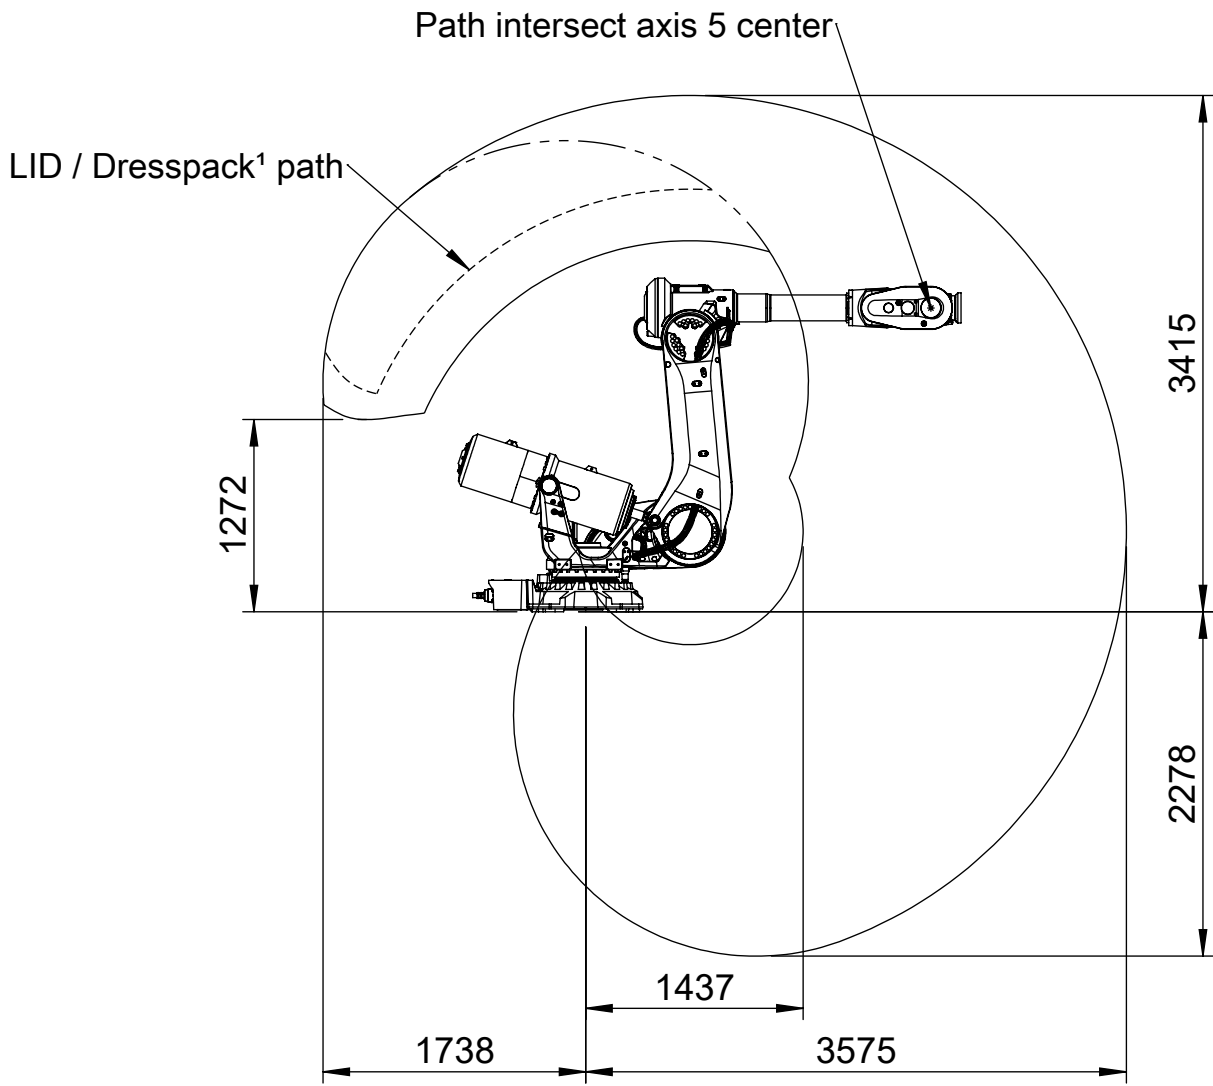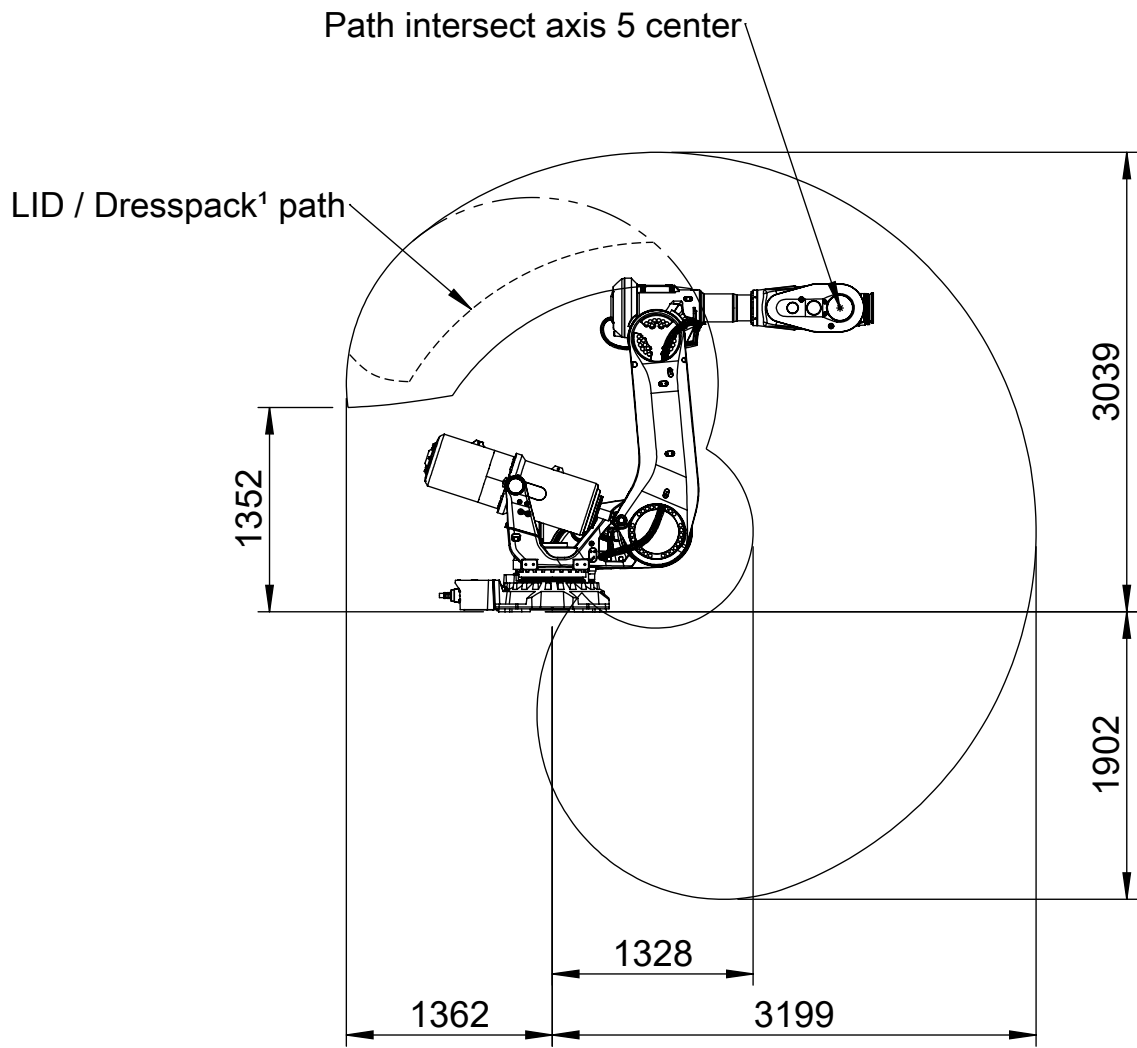

IRB 6750S
Working Range

	350/3.2	270/3.6	215/3.9	270/3.6LID	220/3.5LID	185/4.0LID
Axis 1	±170°	±170°	±170°	±170°	±170°	±170°
Axis 2	-40° / +160°	-40° / +160°	-40° / +160°	-40° / +160°	-40° / +160°	-40° / +160°
Axis 3	-180° ¹ / +70°	-180° ¹ / +70°	-180° ¹ / +70°	-160° / +70°	-160° / +70°	-160° / +70°
Axis 4	±300°	±300°	±300°	±300°	±300°	±300°
Axis 5	±130°	±130°	±130°	±120° ²	±120° ²	±120° ²
Axis 6	±360°	±360°	±360°	±220° ²	±220° ²	±220° ²

1. -160° with lower arm dresspack
2. Combination can limit working range, see product specification
3. Extended range ±220°, not compatible with spot welding dresspack (SW)

New
Latest Revision

Prepared	Responsible Department	Description	SWD	Drawing	
Approved	Security level	Working Area IRB 67X0S			Sheet 2
Status	ECO number				No. of sh. 2
Approved					Document no. 3HAC091894-002

IRB	Variant [Kg/m]	Sheet
6730S	270 / 3.1	1
	210 / 3.5	
	150 / 4.0	
6750S	350 / 3.2	2
	270 / 3.6	
	215 / 3.9	