



ROBOTICS

Product specification

IRB 760



Trace back information:
Workspace 26B version a3
Checked in 2026-06-01
Skribenta version 5.6.019

Product specification

IRB 760-450/3.2

IRB 760-445/3.2

IRC5

Document ID: 3HAC039612-001

Revision: W

The information in this manual is subject to change without notice and should not be construed as a commitment by ABB. ABB assumes no responsibility for any errors that may appear in this manual.

Except as may be expressly stated anywhere in this manual, nothing herein shall be construed as any kind of guarantee or warranty by ABB for losses, damage to persons or property, fitness for a specific purpose or the like.

In no event shall ABB be liable for incidental or consequential damages arising from use of this manual and products described herein.

This manual and parts thereof must not be reproduced or copied without ABB's written permission.

Keep for future reference.

Additional copies of this manual may be obtained from ABB.

Original instructions.

Table of contents

Overview	7
1 Description	9
1.1 Structure	9
1.1.1 Introduction	9
1.1.2 Technical data	11
1.2 Impacting robot lifetime	14
1.3 Safety standards	20
1.3.1 Applicable standards	20
1.4 Installation	22
1.4.1 Introduction	22
1.4.2 Technical data	23
1.4.3 Mounting the manipulator	27
1.5 Calibration	33
1.5.1 Calibration methods	33
1.5.2 Fine calibration	34
1.6 Load diagrams	35
1.6.1 Introduction to load diagrams	35
1.6.2 Load diagrams	36
1.6.3 Maximum load and moment of inertia	38
1.6.4 Maximum TCP acceleration	39
1.7 Mounting of equipment	40
1.7.1 Introduction	40
1.8 Robot motion	45
1.8.1 Introduction	45
1.8.2 Performance according to ISO 9283	48
1.8.3 Velocity	49
1.8.4 Robot stopping distances and times	50
1.9 Customer connections	51
1.9.1 Introduction	51
1.10 Maintenance and troubleshooting	53
1.10.1 Introduction	53
2 Specifications of variants and options	55
2.1 Introduction to variants and options	55
2.2 Manipulator	56
2.3 Floor cables	61
2.4 User documentation	62
2.5 Warranty	63
3 Accessories	65
3.1 Introduction to accessories	65
Index	67

This page is intentionally left blank

Overview

About this product specification

This product specification describes the performance of the manipulator or a complete family of manipulators in terms of:

- The structure and dimensional prints
- The fulfilment of standards, safety, and operating equipment
- The load diagrams, mounting or extra equipment, the motion, and the robot reach
- The specification of available variants and options

The specification covers the manipulator using the IRC5 controller.

Usage

Product specifications are used to find data and performance about the product, for example to decide which product to buy. How to handle the product is described in the product manual.

The specification is intended for:

- Product managers and product personnel
- Sales and marketing personnel
- Order and customer service personnel
- Integrators and customers

References

Reference	Document ID
<i>Product specification - Controller IRC5</i> IRC5 with main computer DSQC1000.	3HAC047400-001
<i>Product specification - Controller software IRC5</i> IRC5 with main computer DSQC1000 and RobotWare 6.	3HAC050945-001
<i>Product manual - IRB 760</i>	3HAC039838-001
<i>Product specification - Robot user documentation, IRC5 with RobotWare 6</i>	3HAC052355-001
<i>Product specification - Robot stopping distances according to ISO 10218-1</i>	3HAC048645-001

Revisions

Revision	Description
-	First edition.
A	• Table for ambient temperature adjusted • Minor corrections
B	• Machinery directive updated
C	• The maximum allowed deviation in levelity of the base plate is changed, see Mounting the manipulator on page 27.
D	• Minor corrections/update

Continues on next page

Revision	Description
E	Text for ISO test adjusted
F	Minor corrections/update
G	Graphite white color added
H	Minor corrections/update
J	Axis Calibration method added
K	Published in release R17.1. The following updates are done in this revision: Restriction of load diagram added.
L	Published in release R17.2. The following updates are done in this revision: Updated list of applicable standards.
M	Published in release R18.1. The following updates are done in this revision: TCP acceleration added.
N	Published in release R18.2. The following updates are done in this revision: Added locating hole position in tool flange view.
P	Published in release R20C The following updates are done in this revision: New variants IRB 760-445/3.2 added.(only for press tending application)
Q	Published in release R20D The following updates are done in this revision: - New customer option cable harness (with ethernet cable) added. - Warranty section updated.
R	Published in release R21C. The following updates are done in this revision: - Text regarding fastener quality is updated. - Removed Axis resolution. - Updated information about the option <i>Extended working range</i>.
S	Published in release 23D. The following updates are done in this revision: - The data for robot stopping distances is removed. See <i>Product specification - Robot stopping distances according to ISO 10218-1 (3HAC048645-001)</i> - Added RAL code in manipulator color introduction.
T	Published in release 24D. The following updates are done in this revision: Updated the section Technical data on page 23.
U	Published in release 25.3. The following updates are done in this revision: - Company name updated to reflect current legal entities. - Updated portal name from myABB to ABB Robotics One.
V	Published in release 26.1. The following updates are made in this revision: - Removed duplication of robot weight specification. - Company name updated to reflect current legal entities.
W	Published in release 26B. The following updates are made in this revision: Added section <i>Impacting robot lifetime</i> and section <i>Intended use</i>.

1 Description

1.1 Structure

1.1.1 Introduction

Robot family

IRB 760 is ABB Robotics latest generation of 4-axis robot, designed with a focus on its high production capacity, short cycle time at a high payload, long reach together with the very high uptime, which is significant for ABB's robots.

It is available in two variants with a handling capacity of 450 kg and 445 kg and a reach of 3.18 m. The IRB 760-445/3.2 variant has a modified morphology of the tilt housing.

Customer connections (option) as power, signals, Bus signals and twin air are integrated in the robot, from the robot base to connections at the robot tool flange.

Intended use

IRB 760 is ideal for use in palletizing, material handling, gluing and cutting in food and beverage, Electric Vehicle (EV), automotive, and the general industries.

See [Impacting robot lifetime on page 14](#).

Operating system

The robot is equipped with the IRC5 controller and robot control software, RobotWare. RobotWare supports every aspect of the robot system, such as motion control, development and execution of application programs, communication etc. see *Product specification - Controller IRC5*.

Safety

Safety standards valid for complete robot, manipulator and controller.

Additional functionality

For additional functionality, the robot can be equipped with optional software for application support - for example gluing and welding, communication features - network communication - and advanced functions such as multitasking, sensor control etc. For a complete description on optional software, see *Product specification - Controller software IRC5*.

Continues on next page


1 Description

1.1.1 Introduction

Continued

Manipulator axes

The IRB 760 manipulator has 4 axes as shown in the following figure.

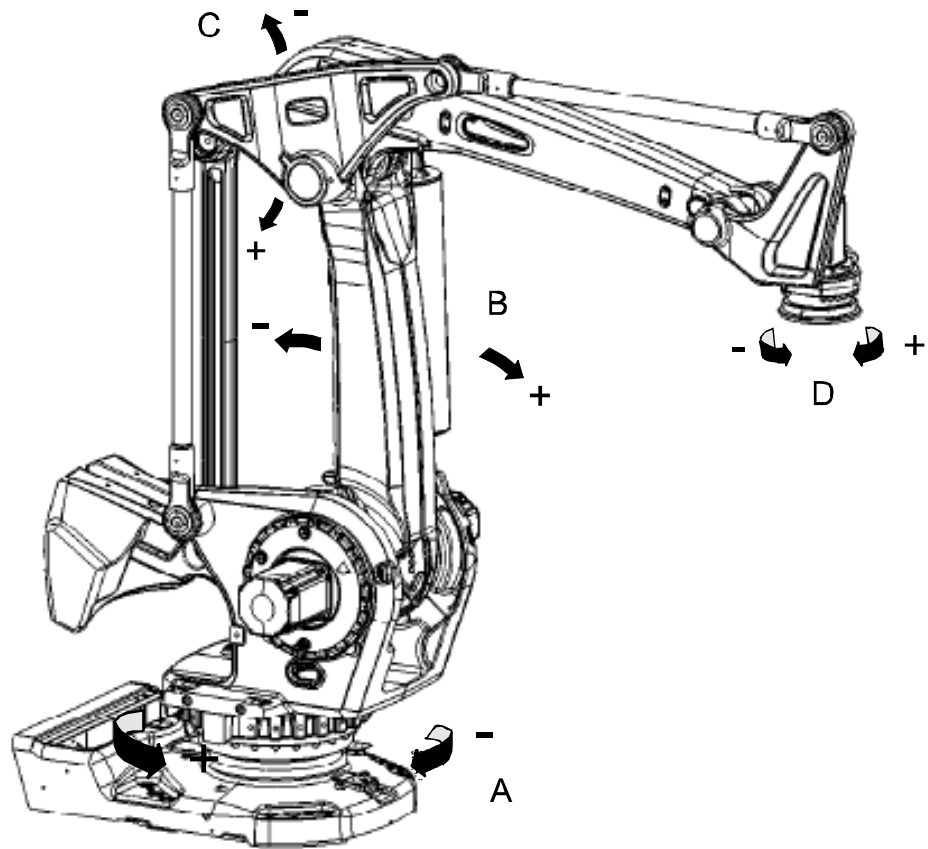

xx1000001136

Pos	Description
A	Axis 1
B	Axis 2
C	Axis 3
D	Axis 6

1.1.2 Technical data

Available variants

The IRB 760 is available in following variants, for floor mounting (no tilting around X or Y axis).

Robot variant	Handling capacity	Reach (m)
IRB 760-450/3.2	450 kg	3.18 m
IRB 760-445/3.2	445 kg	3.18 m


Other technical data

Data	Description	Note
Airborne noise level	The sound pressure level outside the working space	< 70 dB (A) Leq (acc. to Machinery directive 2006/42/EG).

Power consumption at max load

Type of movement	IRB 760-450/3.2 IRB 760-445/3.2
ISO cube maximum velocity	2.75 kW
General palletizing movements	2.95 kW
Robot in calibration position	IRB 760-450/3.2 IRB 760-445/3.2
Brakes engaged	0.20 kW
Brakes disengaged	0.98 kW

The path E1-E2-E3-E4 in the ISO cube is show in the following figure.

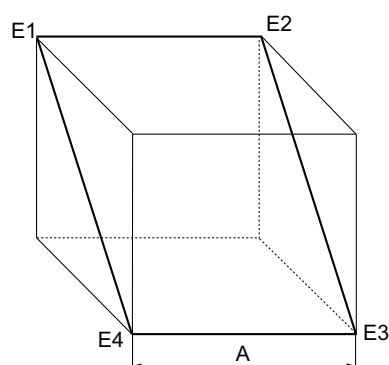

xx1000000101

	Description
A	1,000 mm

Dimensions IRB 760

The following figure shows the rear, side and top view of the IRB 760 manipulator (dimensions in mm).


Continues on next page

1 Description

1.1.2 Technical data

Continued

IRB 760-450/3.2

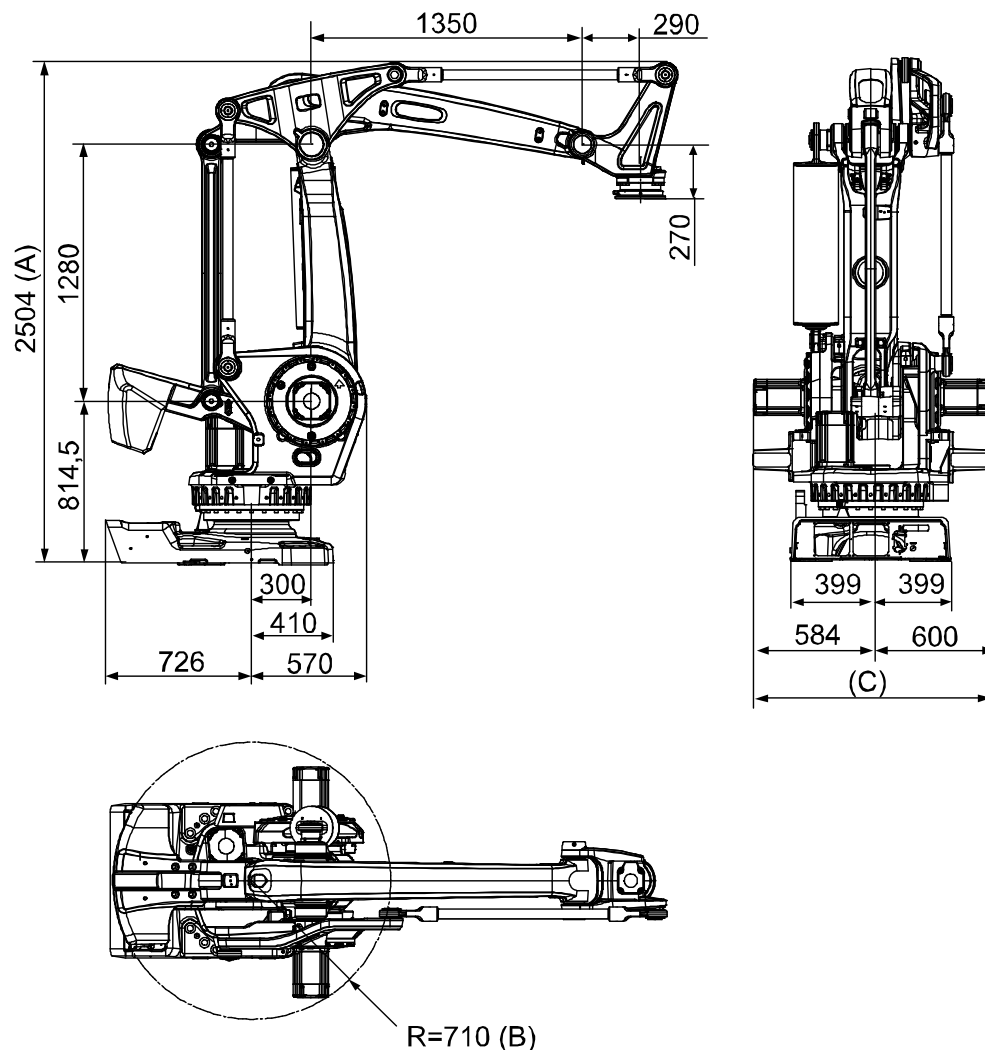


xx1000001137

	Description
A	2966 mm max working range
B	Radius for axis 3 motor 750 mm radius for fork lift pocket (option)
C	Max forklift width 1195 mm

Continues on next page

IRB 760-445/3.2

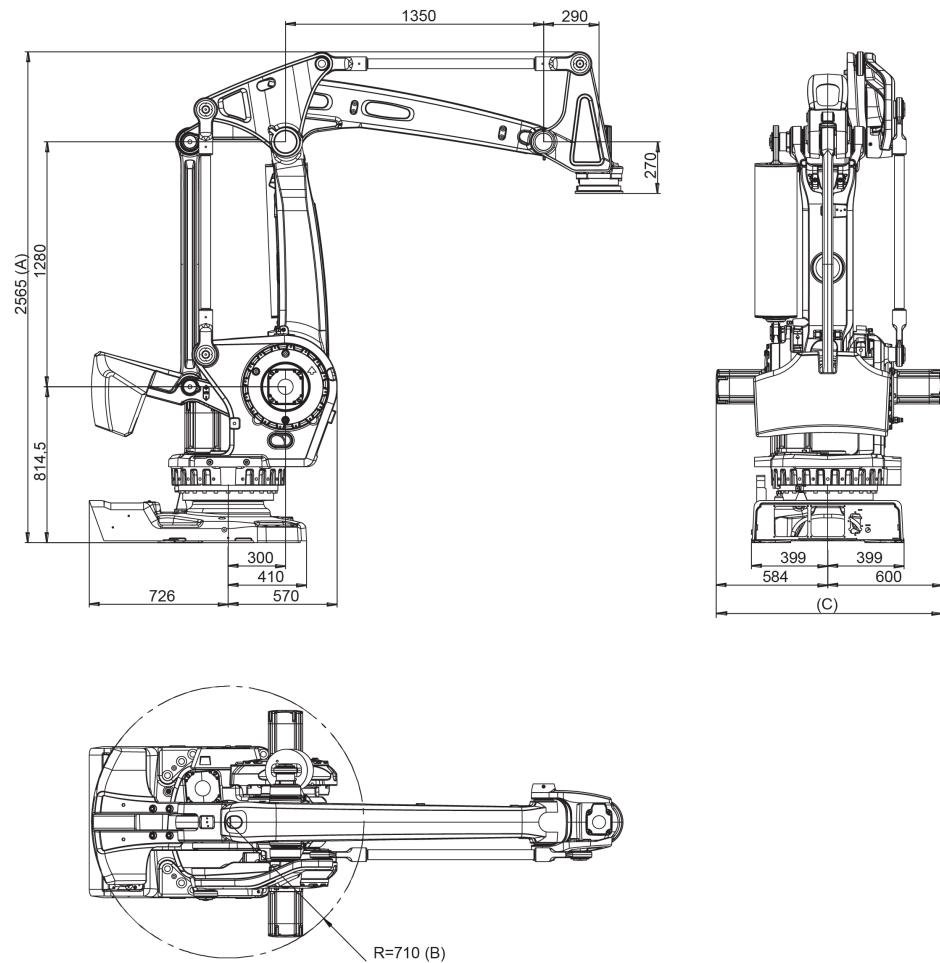

xx2000000270

	Description
A	3027 mm max working range
B	Radius for axis 3 motor 750 mm radius for fork lift pocket (option)
C	Max forklift width 1195 mm

1 Description

1.2 Impacting robot lifetime

1.2 Impacting robot lifetime

Introduction

The expected lifetime of a robot is an important factor when planning an installation. This information is aiming to help you to maximize the lifetime of your robot and avoid unnecessary downtime or repair.

The lifetime of a robot is influenced by the following, but not limited to, factors:

- [Robot type selection on page 14](#)
- [Duty factor on page 14](#)
- [Environmental conditions on page 15](#)
- [Application and usage on page 15](#)
- [Design limitations on page 16](#)
- [Maintenance on page 17](#)
- [Individual lifetime variability on page 17](#)
- [Extreme usage on page 17](#)

Robot type selection

Selecting the right robot for the application is generally done based on payload and reach criteria, but other factors can influence the selection, such as the duty factor. Selecting the most suitable variant is crucial to achieve the expected high performance, uptime, and lifetime. Always select a robot in accordance with the intended use, see [Intended use on page 9](#).

ABB robots are capable of high accelerations and speeds. It is generally recommended to use RobotStudio to find out if a robot model is suitable for a specific application and duty factor. RobotStudio is an excellent tool to help with the assessment of the duty factor and the selection of the most suitable robot variant.

This robot is not specifically designed for use in demanding applications with a very high duty factor. If used in such conditions, a significant reduction in lifetime is possible for all axes, depending on the cycle. See [Extreme usage on page 17](#).

When selecting the robot variant, consider using application-specific robot, and suitable protection type.



Note

Use the Mechanical Analysis add-in in RobotStudio (see details below) for help with the assessment, or get technical support from ABB.

Duty factor

Duty factor is the percentage of time the robot is moving divided by the total time, including movement and wait time during the complete robot work cycle. It is a measurement of how much the robot is being used. Gearbox lifetime is reduced more rapidly by a higher duty cycle than by a lower one. See [Extreme usage on page 17](#).

Continues on next page



Note

The duty factor impact on lifetime can be analyzed in the add-in *Mechanical Analysis* in RobotStudio (see details below) and *Service Information System* (SIS) data in the controller. Contact ABB to analyze the SIS data.

Environmental conditions

Following factors within environmental conditions of the robot has an impact on the robot lifetime:

- Temperature:

The robot usage at high temperatures or extreme usage can lead to gearbox and motor cooling problems. Observe operating temperature limits stated in manipulator product manual. Extreme usage normally requires means of reduction of motor and gearbox oil heat.



Note

The add-in Mechanical Analysis in RobotStudio (see details below) or technical support from ABB can provide recommendation whether means of reduction of motor and gearbox oil heat is required.

- Exposure to chemicals might impact sealings, which can cause oil leakage.
- Vibrations caused by not following the foundation requirements might cause reduction of lifetime, for example for bearings. See [Requirements, foundation on page 25](#).
- Cleaning. Wrong cleaning can cause particles entering the sealings which can cause oil leakage. Proper cleaning is described in *Product manual - IRB 760*.

Application and usage

Following factors within robot application and usage has an impact on the robot lifetime:

- Payload definition and overload:

It is important to define the payload within specification and correctly defined tool data. See section [Load diagrams on page 36](#), and *Technical reference manual - RAPID Overview*.

The service routine for load identification, *LoadIdentify*, is available to support tool data definition. See *Operating manual - IRC5 with FlexPendant*.

- Acceleration/deceleration:

The gearbox lifetime is reduced more rapidly by high accelerations/decelerations than by lower ones.



Note

Smoother movements bring reduced energy consumption.

Continues on next page

1 Description

1.2 Impacting robot lifetime

Continued



Note

Acceleration/deceleration can be modified with the instruction AccSet. See *Technical reference manual - RAPID Overview*.

Acceleration/deceleration is optimized by using automatic path planning functionality, either offline, or in RobotStudio, or using the online software.

- Limited movements:

If the range or the rotation angle for an axis is 10° or less, the expected life of the reduction gears may be reduced due to poor lubrication of internal parts or the internal parts being subject to a concentrated load. Add extra lubrication motion to the robot program or to maintenance schedule.



Note

Use RobotStudio *Signal Analyzer* or get technical support from ABB.

- High forces applied externally to the manipulator:

Some applications or not correctly programmed paths apply external forces to the manipulator, which might reduce its lifetime. Example of external force: gripper under constraint when gripping a part or load sharing between multiple robots.

- Number of collisions:

Collisions, especially at high speed and/or with high loads reduce the lifetime of the gearboxes. Avoid collisions and set collision detection sensitivity to the appropriate level.



Note

See the application manual for the controller software, section *Collision detection*, listed in [References on page 7](#).

- Number of emergency stops:

Emergency stops, especially at high speed and/or high loads reduce the lifetime of the gearboxes. Whenever permitted by risk assessment, set the robot stopping functions to stop category 1.



Note

See the product manual for the robot controller, listed in [References on page 7](#).

Design limitations

See the section *Expected component life* in *Product manual - IRB 760*.

Continues on next page

Maintenance

The maintenance and use of the robot will affect the performance and lifetime. For example:

- Preventive maintenance will optimize the lifetime of the robot. The recommended maintenance activities and intervals are described in *Product manual - IRB 760*.
- Observance of lubricant types and maintenance periods recommended by ABB.
- Possible pollution of the lubricant by an external cause, for example, water in the oil caused by high humidity.
- Extreme usage, for example high duty factor or environmental factors, will affect the maintenance schedule, for example, shorter intervals for oil change.

Contact your local ABB office to get technical support from ABB.

Individual lifetime variability

The lifetime varies with individual robots. For example, a cycle with a lower duty factor may fail earlier than one with a higher duty factor. But a cycle with a higher duty factor is more likely to fail earlier than a cycle with lower duty factor.

Extreme usage


Examples of extreme usage in regard to movement: a stress index range that shows up as red (51) in the RobotStudio add-in *Mechanical Analysis*, press tending application, very severe palletizing applications, major use of axis 1, 2, or 3 movement.

The controller can issue a duty factor warning on the FlexPendant, if applicable. See the chapter *Troubleshooting* in *Product manual - IRB 760*.

Extreme usage requires specific maintenance, for example, shorter interval for oil change. See *Maintenance schedule* in *Product manual - IRB 760*.

Summary

The diagram illustrates the relationship between robot run time and failure possibility.

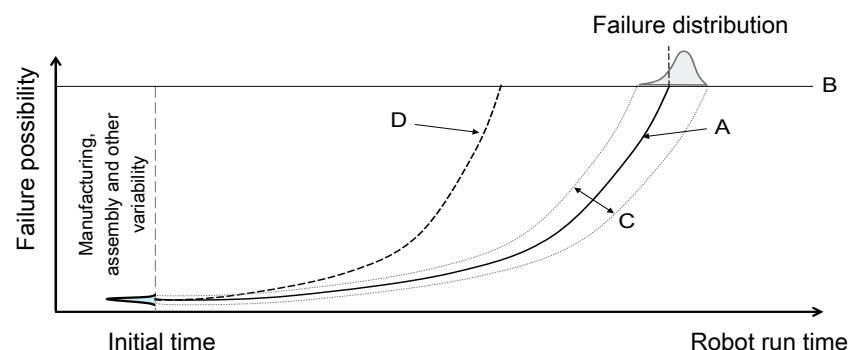

xx2500001942

A	Design lifetime
---	-----------------

Continues on next page

1 Description

1.2 Impacting robot lifetime

Continued

B	Failure threshold
C	Individual variability
D	Negatively affected lifetime

The curve (A) represents the design lifetime, showing how failure probability increases over time following a normal distribution pattern. The failure threshold (B) indicates the point at which component failure becomes likely.

Individual variability between robots is shown by the dotted lines (C), representing the natural variation in component life due to manufacturing, assembly, and other factors. This variability means that while most robots will follow the design lifetime curve, some individual units may experience earlier or later failures within the normal distribution.

As highlighted with the curve (D) in the diagram, robot lifetime can be negatively affected by not following best practices in the key areas discussed in this chapter:

- [Robot type selection on page 14](#)
- [Duty factor on page 14](#)
- [Environmental conditions on page 15](#)
- [Application and usage on page 15](#)
- [Maintenance on page 17](#)

By adhering to the recommendations outlined in each of these sections, users can maximize their robot's operational lifetime and ensure performance stays within the design lifetime curve, avoiding premature failure and unnecessary downtime.

Available tools

There are several tools available throughout the lifecycle of an ABB robot, from support with selecting the most suitable manipulator and optimizing its lifetime, to operation, maintenance, and repair:

ABB toolbox	Type	Product lifecycle		
		Sales, pre-study	Installation, commissioning	Operation, maintenance, repair
Product specification	Document	x	x	
Product manual	Document		x	x
Mechanical Analysis add-in	Add-in in RobotStudio	x	x	x
Service Information System (SIS) / Condition Based Maintenance (CBM)	RobotWare functionality / Customer service analysis		x	x
Connected Services	Hardware and Software		x	x
Automatic Path Planning	RobotStudio functionality and online software	x	x	(x)

Continues on next page

ABB toolbox	Type	Product lifecycle		
		Sales, pre-study	Installation, commissioning	Operation, maintenance, repair
Signal Analyzer / TuneMaster	RobotStudio functionality / Software	x	x	x
ABB support	Customer support	x	x	x

1 Description

1.3.1 Applicable standards

1.3 Safety standards

1.3.1 Applicable standards



Note

The listed standards are valid at the time of the release of this document. Phased out or replaced standards are removed from the list when needed.

General

The product is designed in accordance with ISO 10218-1:2011, Robots for industrial environments - Safety requirements -Part 1 Robots, and applicable parts in the normative references, as referred to from ISO 10218-1:2011. In case of deviations from ISO 10218-1:2011, these are listed in the declaration of incorporation which is part of the product delivery.

Normative standards as referred to from ISO 10218-1

Standard	Description
ISO 9283:1998	Manipulating industrial robots - Performance criteria and related test methods
ISO 10218-2	Robots and robotic devices - Safety requirements for industrial robots - Part 2: Robot systems and integration
ISO 12100	Safety of machinery - General principles for design - Risk assessment and risk reduction
ISO 13849-1:2006	Safety of machinery - Safety related parts of control systems - Part 1: General principles for design
ISO 13850	Safety of machinery - Emergency stop - Principles for design
IEC 60204-1	Safety of machinery - Electrical equipment of machines - Part 1: General requirements

Region specific standards and regulations

Standard	Description
ANSI/RIA R15.06	Safety requirements for industrial robots and robot systems
ANSI/UL 1740	Safety standard for robots and robotic equipment
CAN/CSA Z 434	Industrial robots and robot Systems - General safety requirements

Other standards used in design

Standard	Description
ISO 9787:2013	Robots and robotic devices -- Coordinate systems and motion nomenclatures
IEC 61000-6-2	Electromagnetic compatibility (EMC) – Part 6-2: Generic standards – Immunity standard for industrial environments
IEC 61000-6-4	Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emission standard for industrial environments

Continues on next page

Standard	Description
ISO 13732-1:2006	Ergonomics of the thermal environment - Part 1
IEC 60974-1:2012 ⁱ	Arc welding equipment - Part 1: Welding power sources
IEC 60974-10:2014 ⁱ	Arc welding equipment - Part 10: EMC requirements
ISO 14644-1:2015 ⁱⁱ	Classification of air cleanliness
IEC 60529:1989 + A2:2013	Degrees of protection provided by enclosures (IP code)

ⁱ Only valid for arc welding robots. Replaces IEC 61000-6-4 for arc welding robots.

ⁱⁱ Only robots with protection Clean Room.

1 Description

1.4.1 Introduction

1.4 Installation

1.4.1 Introduction

General

IRB 760 is designed for floor mounting (no tilting around X or Y axis), end effector with max. weight of 450 kg and 445 kg including payload, can be mounted on the mounting flange (axis 6). For more information on Load Diagrams, see [Load diagrams on page 35](#).

Working range

The working range of axis 1 can be limited by mechanical stops. Electronic Position Switches can be used on all axes, for position indication of the manipulator.

Explosive environments

The robot must not be located or operated in an explosive environment.

1.4.2 Technical data

Weight, robot

The table shows the weight of the robot.

Robot model	Weight
IRB 760	2300 kg



Note

The weight does not include tools and other equipment fitted on the robot.

Mounting positions

The table shows valid mounting options for the manipulator.

Mounting option	Installation angle	Note
Floor mounted	0°	



Note

The actual mounting angle must always be configured in the system parameters, otherwise the performance and lifetime is affected. See the product manual for details.

Continues on next page

1 Description


1.4.2 Technical data

Continued

Loads on foundation, robot

The illustration shows the directions of the robots stress forces.

The directions are valid for all floor mounted, suspended and inverted robots.

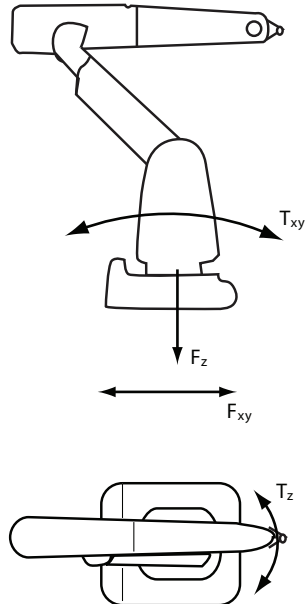

xx1100000521

F_{xy}	Force in any direction in the XY plane
F_z	Force in the Z plane
T_{xy}	Bending torque in any direction in the XY plane
T_z	Bending torque in the Z plane

The table shows the various forces and torques working on the robot during different kinds of operation.



Note

These forces and torques are extreme values that are rarely encountered during operation. The values also never reach their maximum at the same time!



WARNING

The robot installation is restricted to the mounting options given in following load table(s).

Floor mounted

Force	Endurance load (in operation)	Max. load (emergency stop)
Force xy	$\pm 9.1 \text{ kN}$	$\pm 17.7 \text{ kN}$
Force z	$+ 26.7 \pm 3.6 \text{ kN}$	$+ 26.7 \pm 7.9 \text{ kN}$
Torque xy	$\pm 28.9 \text{ kNm}$	$\pm 38.5 \text{ kNm}$
Torque z	$\pm 6.2 \text{ kNm}$	$\pm 14.2 \text{ kNm}$

Continues on next page

Requirements, foundation

The table shows the requirements for the foundation where the weight of the installed robot is included:

Requirement	Value	Note
Flatness of foundation surface	0.3 mm	Flat foundations give better repeatability of the resolver calibration compared to original settings on delivery from ABB. The value for levelness aims at the circumstance of the anchoring points in the robot base.
Minimum resonance frequency	15 Hz  Note It may affect the manipulator life-time to have a lower resonance frequency than recommended.	The value is recommended for optimal performance. Due to foundation stiffness, consider robot mass including equipment. ⁱ For information about compensating for foundation flexibility, see the application manual of the controller software, section <i>Motion Process Mode</i> .

ⁱ The minimum resonance frequency given should be interpreted as the frequency of the robot mass/inertia, robot assumed stiff, when a foundation translational/torsional elasticity is added, i.e., the stiffness of the pedestal where the robot is mounted. The minimum resonance frequency should not be interpreted as the resonance frequency of the building, floor etc. For example, if the equivalent mass of the floor is very high, it will not affect robot movement, even if the frequency is well below the stated frequency. The robot should be mounted as rigid as possible to the floor.

Disturbances from other machinery will affect the robot and the tool accuracy. The robot has resonance frequencies in the region 10 – 20 Hz and disturbances in this region will be amplified, although somewhat damped by the servo control. This might be a problem, depending on the requirements from the applications. If this is a problem, the robot needs to be isolated from the environment.

Storage conditions, robot

The table shows the allowed storage conditions for the robot:

Parameter	Value
Minimum ambient temperature	-25° C
Maximum ambient temperature	+55° C
Maximum ambient temperature (less than 24 hrs)	+70° C
Maximum ambient humidity	95% at constant temperature (gaseous only)

Operating conditions, robot

The table shows the allowed operating conditions for the robot:

Parameter	Value
Minimum ambient temperature	0° C
Maximum ambient temperature	+50° C
Maximum ambient humidity	Max. 95% at constant temperature

Continues on next page

1 Description

1.4.2 Technical data

Continued

Protection classes, robot

The table shows the available protection types of the robot, with the corresponding protection class.

Protection type	Protection class ⁱ
Manipulator, protection type Standard	IP 67

ⁱ According to IEC 60529.

1.4.3 Mounting the manipulator


Maximum Load

Maximum load in relation to the base coordinate system.

Floor Mounted

Force	Endurance load (in operation)	Max. load (emergency stop)
Force xy	$\pm 9.1 \text{ kN}$	$\pm 17.7 \text{ kN}$
Force z	$+ 26.7 \pm 3.6 \text{ kN}$	$+ 26.7 \pm 7.9 \text{ kN}$
Torque xy	$\pm 28.9 \text{ kNm}$	$\pm 38.5 \text{ kNm}$
Torque z	$\pm 6.2 \text{ kNm}$	$\pm 14.2 \text{ kNm}$

The following figure shows the direction of forces.

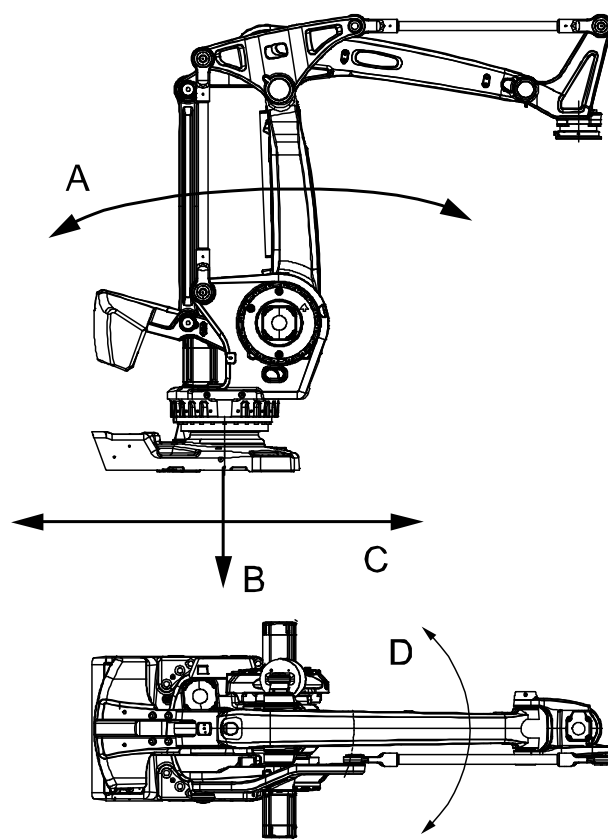

xx1000001138

A	Torque _{xy} (T_{xy})
B	Force _z (F_z)
C	Force _{xy} (F_{xy})
D	Torque _z (T_z)

Note regarding M_{xy} and F_{xy}

The bending torque (M_{xy}) can occur in any direction in the XY-plane of the base coordinate system. The same applies to the transverse force (F_{xy}).

Continues on next page


1 Description

1.4.3 Mounting the manipulator


Continued

Fastening holes robot base

The following figure shows the hole configuration (dimensions in mm).

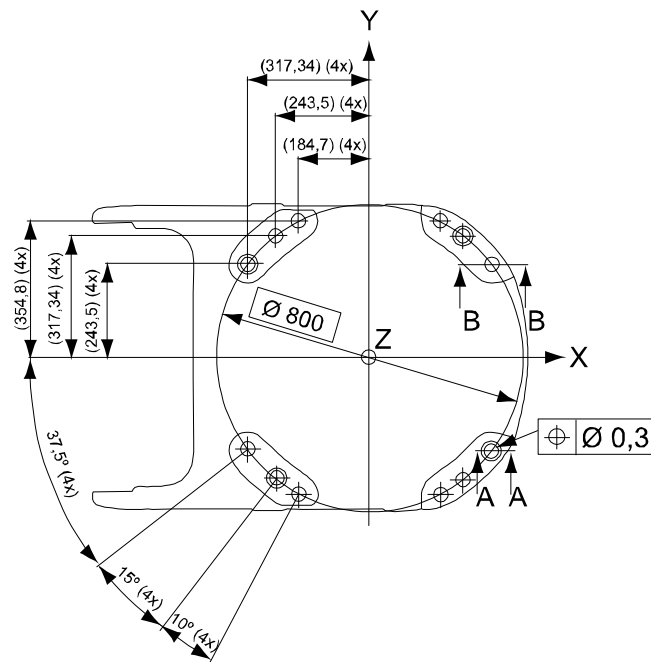

xx1000001050

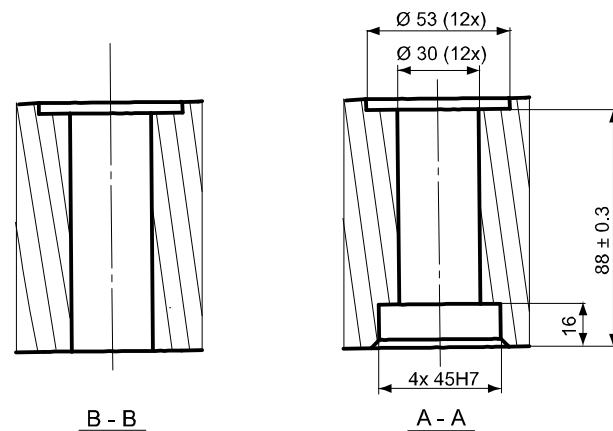

xx1000001051

Recommended screws for fastening the manipulator to the base	M24 x 140 8.8 with 4 mm flat washer.
Torque value	725 Nm

Two guiding sleeves required, dimensions see figures in this chapter.




Note

Only two guiding sleeves shall be used. The corresponding holes in the base plate shall be circular and oval according to the following base plate drawing. regarding AbsAcc performance, the recommended are the chosen guide holes those are according to next two figures.

Continues on next page

Base plate drawing

The following figure shows the option base plate (dimensions in mm).

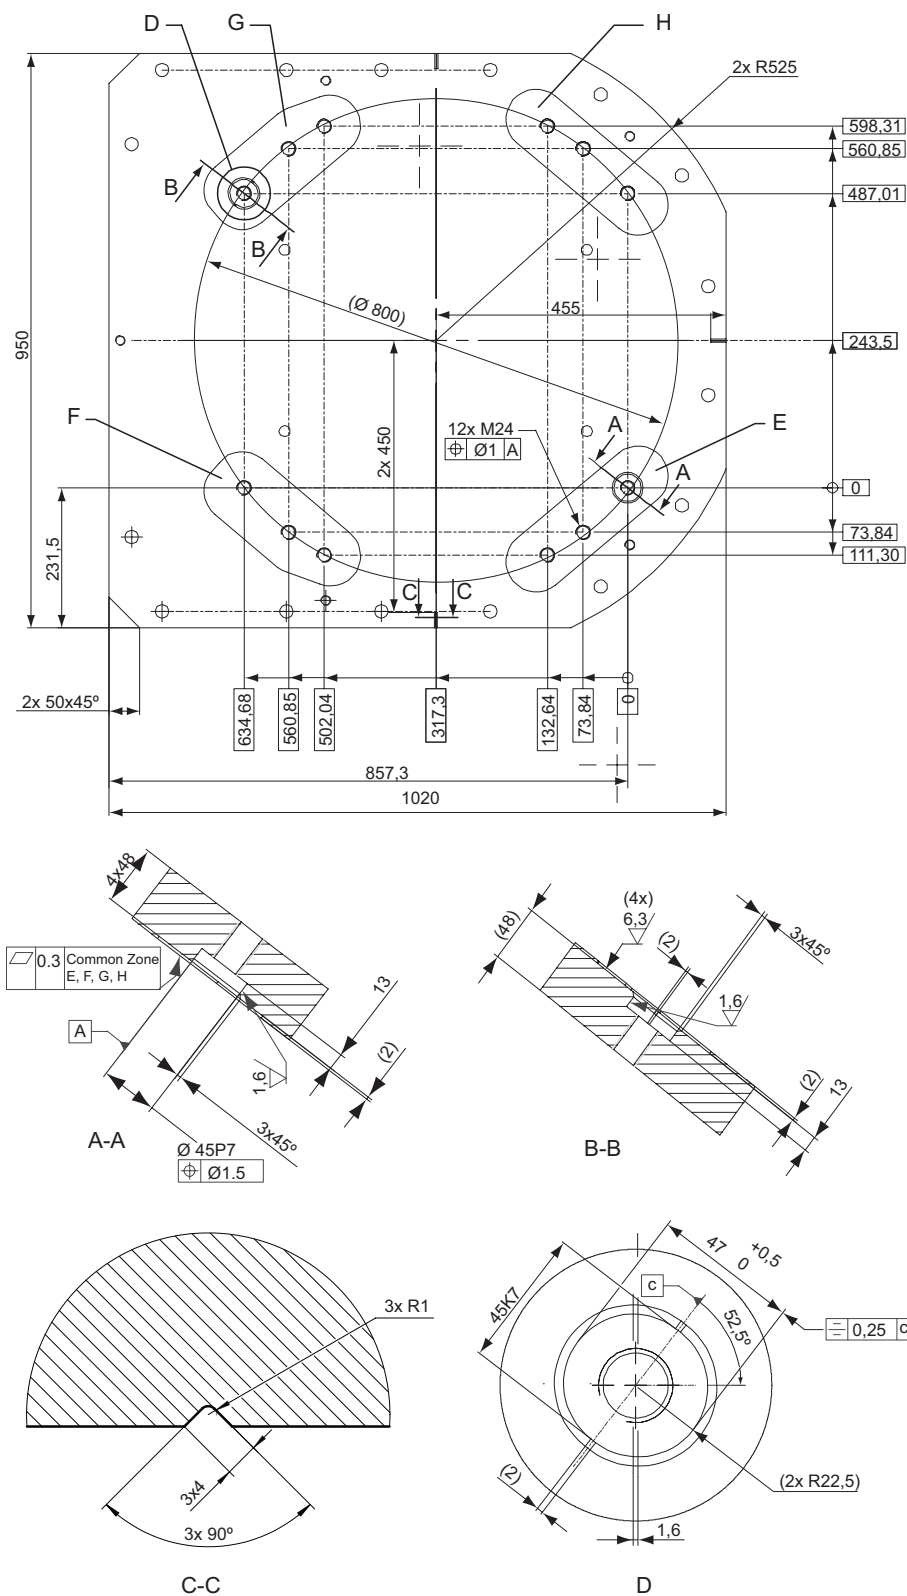

xx1000001053

Continues on next page



1 Description

1.4.3 Mounting the manipulator

Continued

E, F, G, H	Common tolerance zone (accuracy all over the base plate from one contact surface to the other)
------------	--

Continues on next page

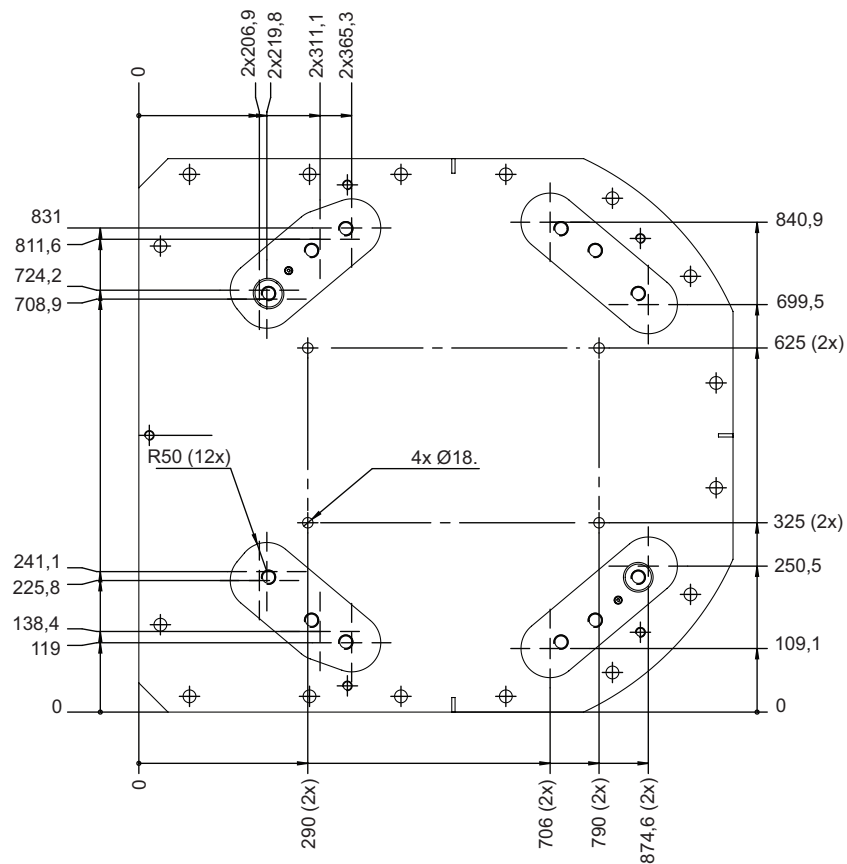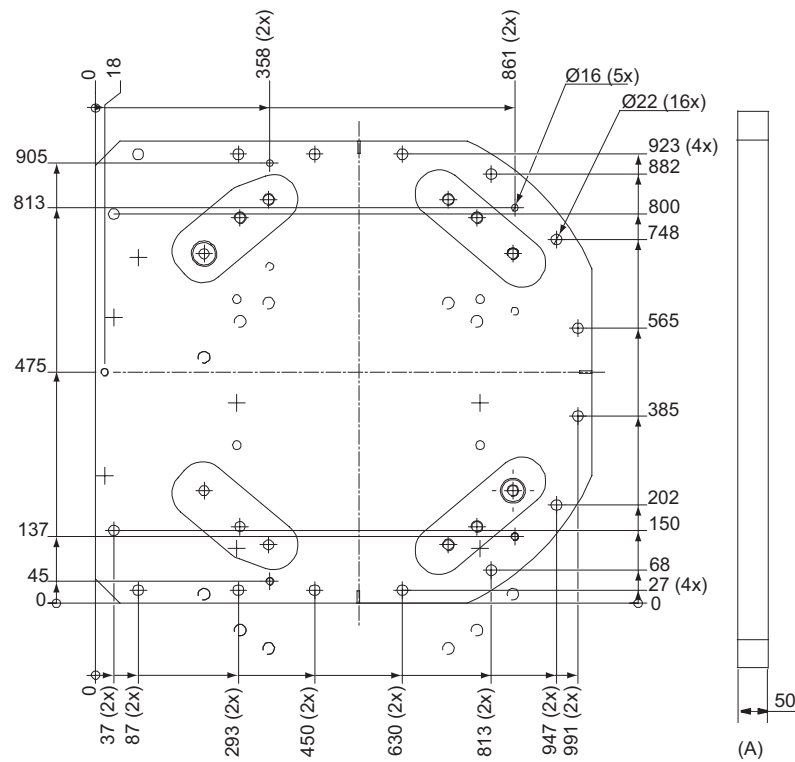

xx1000001054


Continues on next page

1 Description

1.4.3 Mounting the manipulator

Continued

Pos	Description
A	Color: RAL 9005. Thickness: 80-100 µm

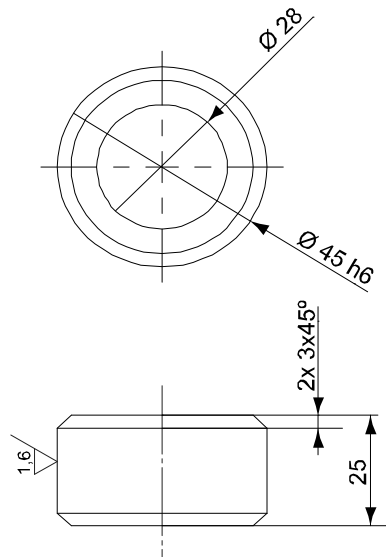

xx1000001055

Pos	Description
-	Guide sleeve, protected from corrosion

1.5 Calibration

1.5.1 Calibration methods

Overview

This section specifies the different types of calibration and the calibration methods that are supplied by ABB.

More information is available in the product manual.

Types of calibration

Type of calibration	Description	Calibration method
Standard calibration	The calibrated robot is positioned at calibration position. Standard calibration data is found on the SMB (serial measurement board) or EIB in the robot.	Axis Calibration or Calibration Pendulum ⁱ

ⁱ The robot is calibrated by either Calibration Pendulum or Axis Calibration at factory. Always use the same calibration method as used at the factory.

Information about valid calibration method is found on the calibration label or in the calibration menu on the FlexPendant.

If no data is found related to standard calibration, contact the local ABB Service.

Brief description of calibration methods

Calibration Pendulum method

Calibration Pendulum is a standard calibration method for calibration of some ABB robots.

Two different routines are available for the Calibration Pendulum method:

- Calibration Pendulum II
- Reference calibration

The calibration equipment for Calibration Pendulum is delivered as a complete toolkit, including the *Operating manual - Calibration Pendulum*, which describes the method and the different routines further.

Axis Calibration method

Axis Calibration is a standard calibration method for calibration of IRB 760. It is the recommended method in order to achieve proper performance.

The following routines are available for the Axis Calibration method:

- Fine calibration
- Update revolution counters
- Reference calibration

The calibration equipment for Axis Calibration is delivered as a toolkit.

The actual instructions of how to perform the calibration procedure and what to do at each step is given on the FlexPendant. You will be guided through the calibration procedure, step by step.

1 Description


1.5.2 Fine calibration

1.5.2 Fine calibration

General

Fine calibration is made using the Calibration Pendulum, see *Operating manual - Calibration Pendulum*.

The following figure shows all axes in zero position.

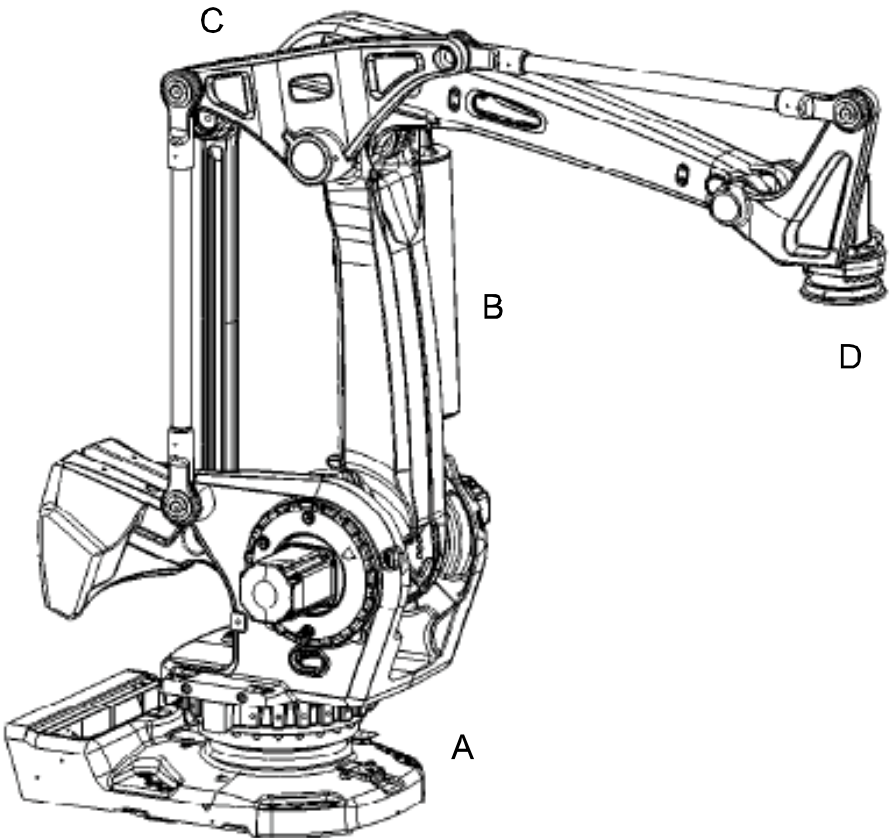

xx1000001142

Pos	Description
A	Axis 1
B	Axis 2
C	Axis 3
D	Axis 6

Calibration	Position
Calibration of all axes	All axes are in zero position
Calibration of axis 1 and 2	Axis 1 and 2 in zero position Axis 3 to 6 in any position
Calibration of axis 1	Axis 1 in zero position Axis 2 to 6 in any position

1.6 Load diagrams

1.6.1 Introduction to load diagrams

Information**WARNING**

It is very important to always define correct actual load data and correct payload of the robot. Incorrect definitions of load data can result in overloading of the robot.

If incorrect load data is used, and/or if loads outside the load diagram are used, the following parts can be damaged due to overload:

- motors
- gearboxes
- mechanical structure

**WARNING**

In RobotWare, the service routine LoadIdentify can be used to determine correct load parameters. The routine automatically defines the tool and the load.

See *Operating manual - IRC5 with FlexPendant*, for detailed information.

**WARNING**

Robots running with incorrect load data and/or with loads outside the load diagram, will not be covered by robot warranty.

General

The load diagram is valid up to max moment of inertia for axis 6. No extra load on upper arm.

At different moment of inertia the load diagram will be changed. For robots that are allowed tilted, wall or inverted mounted, the load diagrams as given are valid and thus it is also possible to use RobotLoad within those tilt and axis limits.

Control of load case with RobotLoad

To verify a specific load case, use the RobotStudio add-in RobotLoad.

The result from RobotLoad is only valid within the maximum loads and tilt angles. There is no warning if the maximum permitted arm load is exceeded. For over-load cases and special applications, contact ABB for further analysis.


1 Description

1.6.2 Load diagrams

1.6.2 Load diagrams

IRB 760-450/3.2

The following figure shows the maximum permitted load mounted on the robot tool flange at different positions (center of gravity).

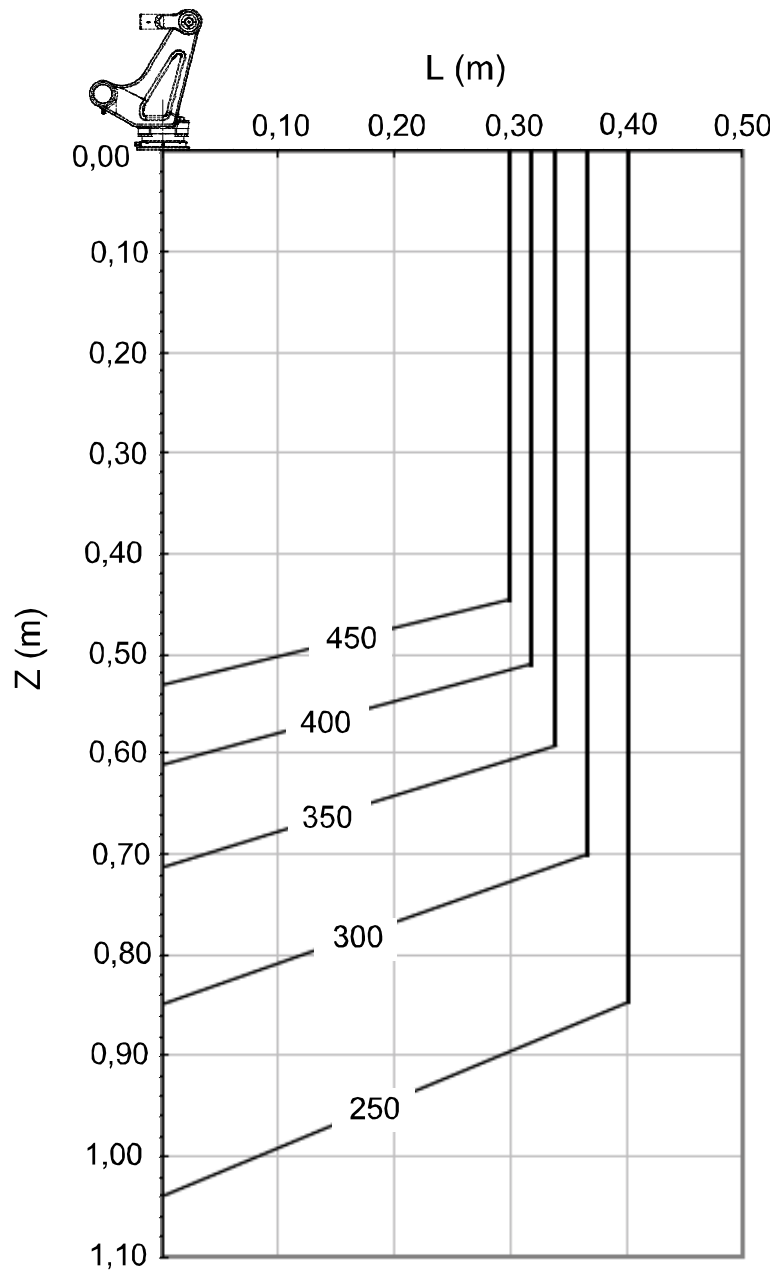


xx1000001143

Continues on next page

IRB 760-445/3.2

The following figure shows the maximum permitted load mounted on the robot tool flange at different positions (center of gravity).

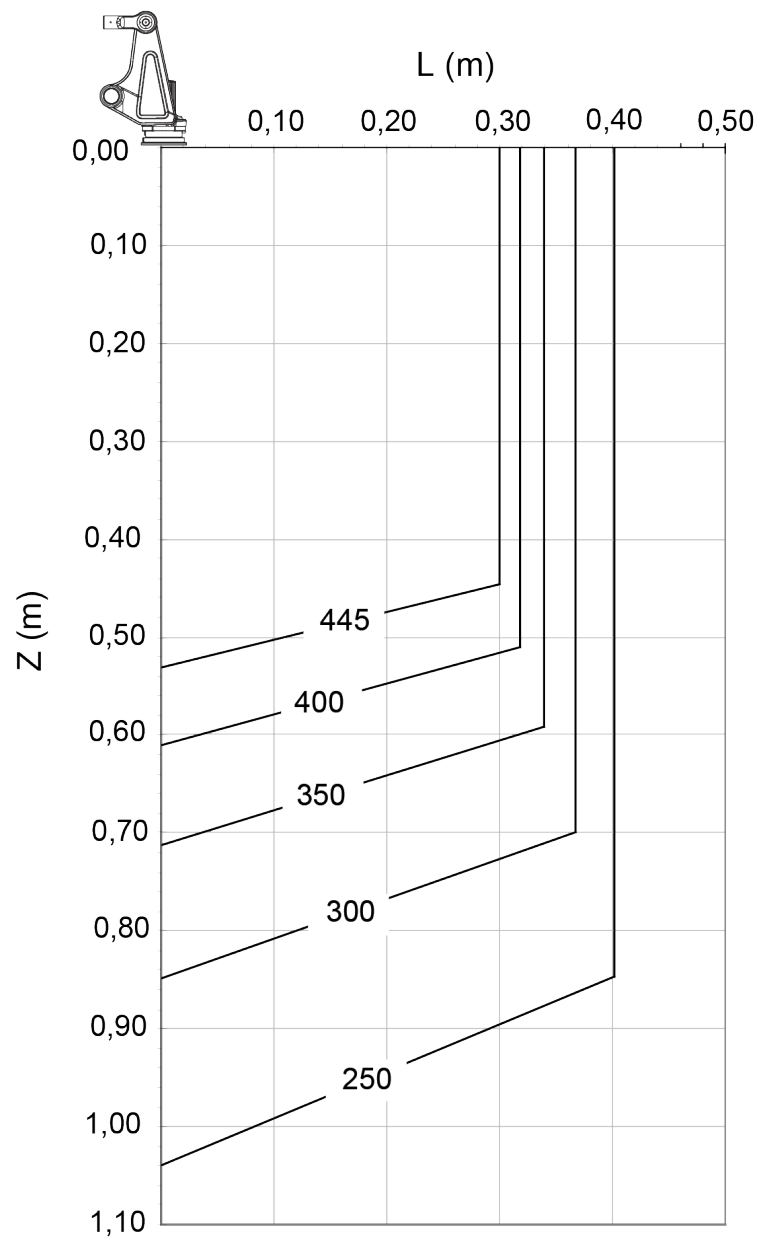

xx2000000271

1 Description


1.6.3 Maximum load and moment of inertia

1.6.3 Maximum load and moment of inertia

General

Load in kg, Z and L in m and J in kgm^2 .

Axis	Maximum moment of inertia
6	$J_{a6} = \text{Load} \times L^2 + J_{0Z} \leq 400 \text{ kgm}^2$

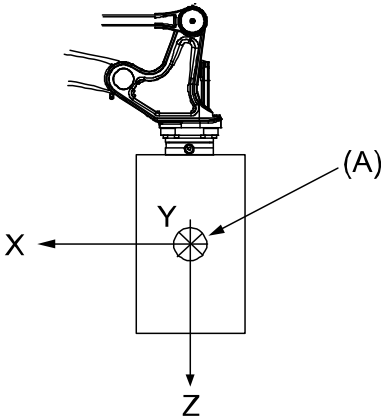

xx1000001078

Pos	Description
A	Center of gravity

	Description
J_{0X}, J_{0Y}, J_{0Z}	Max. moment of inertia around the X, Y and Z axes at center of gravity.

1.6.4 Maximum TCP acceleration

General

Higher values can be reached with lower loads than the nominal because of our dynamical motion control QuickMove2. For specific values in the unique customer cycle, or for robots not listed in the table below, we recommend to use RobotStudio.

Maximum Cartesian design acceleration for nominal loads

Robot type	E-stop	Controlled Motion
	Max acceleration at nominal load COG [m/s ²]	Max acceleration at nominal load COG [m/s ²]
IRB 760	23	17



Note

Acceleration levels for emergency stop and controlled motion includes acceleration due to gravitational forces. Nominal load is defined with nominal mass and cog with max offset in Z and L (see the load diagram).

1 Description

1.7.1 Introduction

1.7 Mounting of equipment


1.7.1 Introduction

General

Extra loads can be mounted on to the upper arm and on to the left side of the frame. Holes and definitions of masses are shown in figure below.

For mounting of an external vacuum hose there are six holes on the upper arm figure below. The max. weight for the vacuum hose and fastening device is 35 kg. When using the holes, the weight of the vacuum hose shall be reduced from the max. Handling capacity, for each variant respectively.

IRB 760-450/3.2

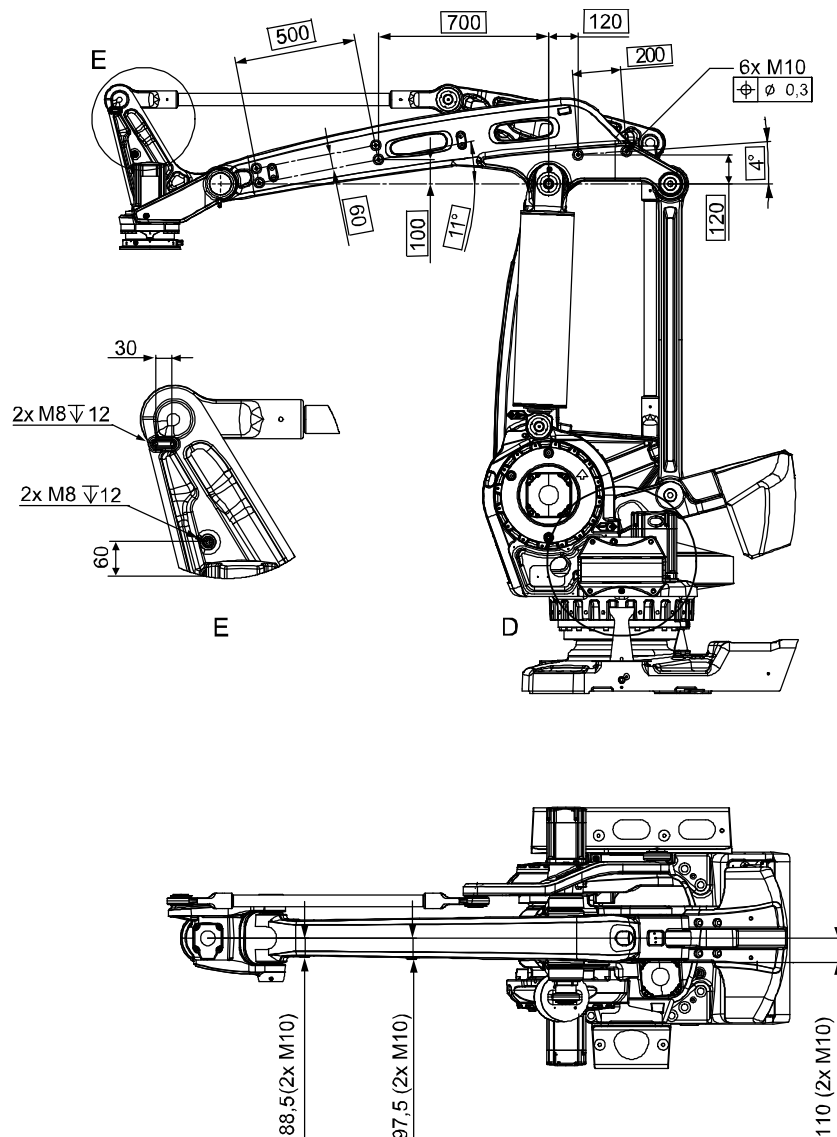


xx1000001147

Continues on next page

1 Description


1.7.1 Introduction

Continued

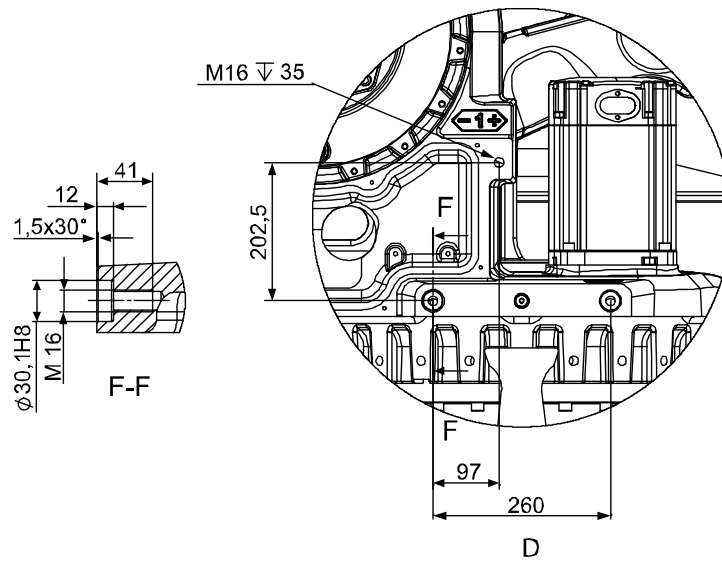

xx1000001148

IRB 760-445/3.2

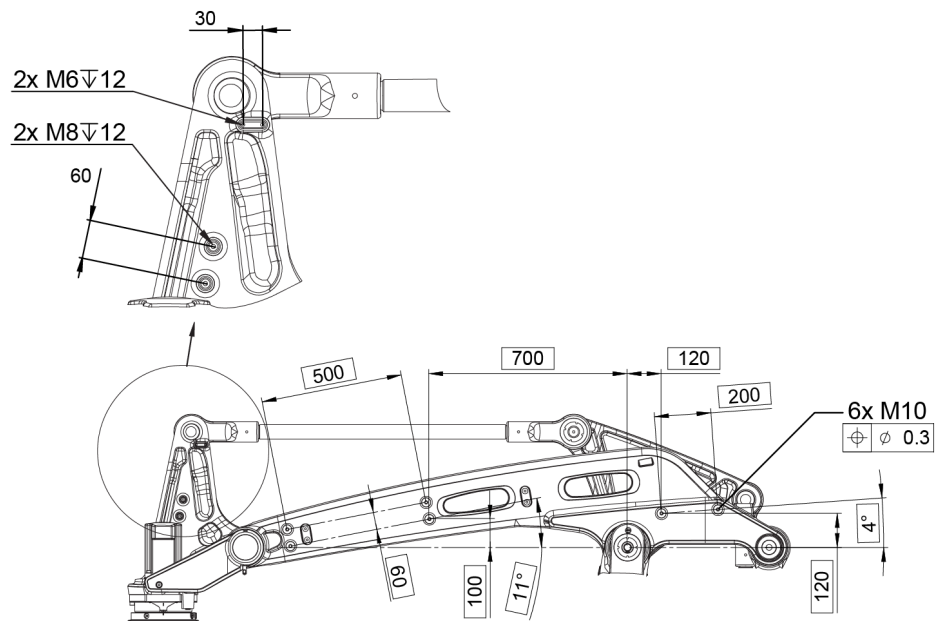

xx1900001259

Continues on next page

1 Description


1.7.1 Introduction

Continued

Frame

For mounting of extra load on to the frame there are three holes on the left side (see previous figure). The max. weight of the extra load is 150 kg and the max. moment of inertia is 120 kgm².

Description	Value and definition
Permitted extra load on frame	M = 150 kg
Max. moment of inertia for extra load	J _H = 120 kgm ²
Recommended position, see figure below	J _H = J _{H0} + M x R ² J _{H0} is the moment of inertia (kgm ²) for the extra load. R is the radius (m) from the center of axis 1. M is the total mass (kg) of the extra load.

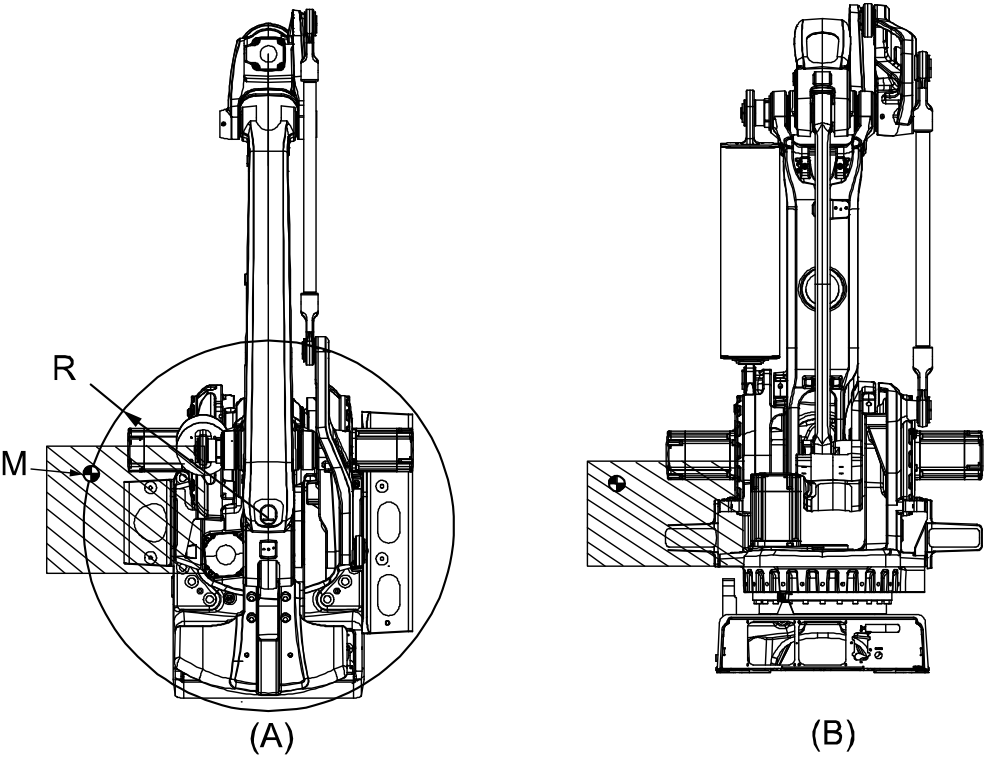


xx1000001149

Pos	Description
A	View from above
B	View from the rear
M	Center of gravity of hip load
R	Radius to CoG of (M)

Continues on next page

Robot tool flange

The following figure shows the robot tool flange SS-EN ISO 9409;2004 (dimensions in mm).

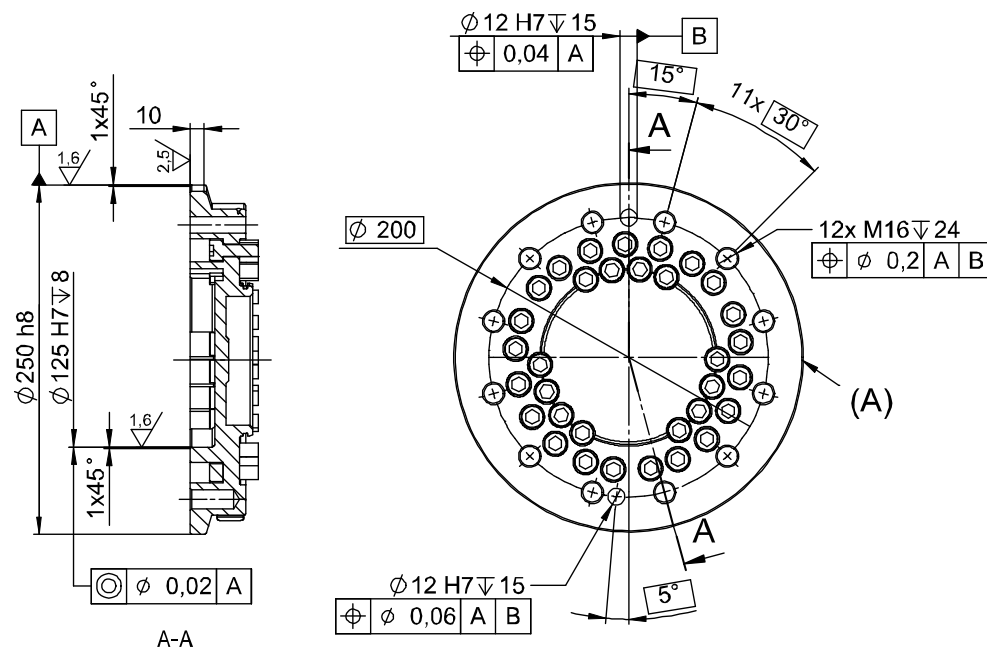

xx1000001058


Pos	Description
A	Calibration mark

Continues on next page

1 Description

1.7.1 Introduction

Continued

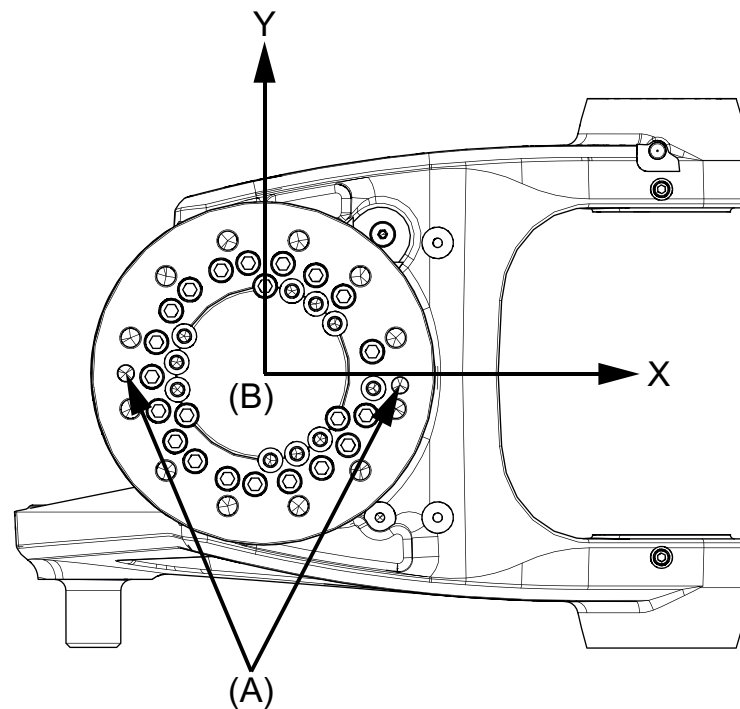

xx1800001403

-	Tool flange in bottom view
A	Locating hole
B	Tool coordinate system

Fastener quality

When fitting tools on the tool flange, only use screws with quality 12.9. For other equipment use suitable screws and tightening torque for your application.

1.8 Robot motion

1.8.1 Introduction

Type of motion

The table below specifies the types and ranges of the robot motion in every axis.

Axis	Type of motion	Range of motion
1	Rotation motion	-180° to +180° Can be extended, with use of option, to: -220° to +220° (option 561-1)
2	Arm motion	-42° to +85°
3	Arm motion	-20° to +120° IRB 760 - 445/3.2: -20° to +80°
2-3	Arm motion	20° to 160°
6	Turn motion	-300° to +300° - 67 revolutions to +67 revolutions ¹⁾

¹⁾ The default working range for axis 6 can be extended by changing parameter values in the software. Option "Independent axis" can be used for resetting the revolution counter after the axis has been rotated (no need for "rewinding" the axis).

Continues on next page

1 Description


1.8.1 Introduction

Continued

Illustration

The following figure shows the extreme positions of the robot arm specified at tool flange center (dimensions in mm).

IRB 760 - 450/3.2

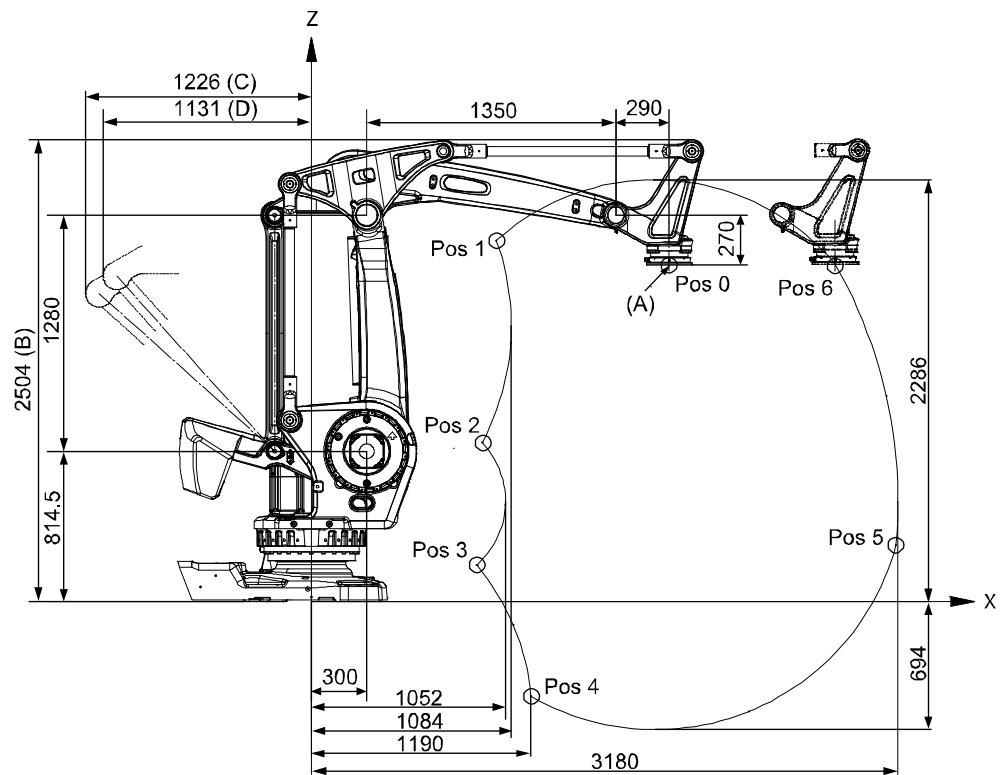


xx1000001151

Pos	Description
A	Tool flange center
B	Max working range 2966 mm
C	Mechanical stop
D	Max working range

Continues on next page

IRB 760 - 445/3.2

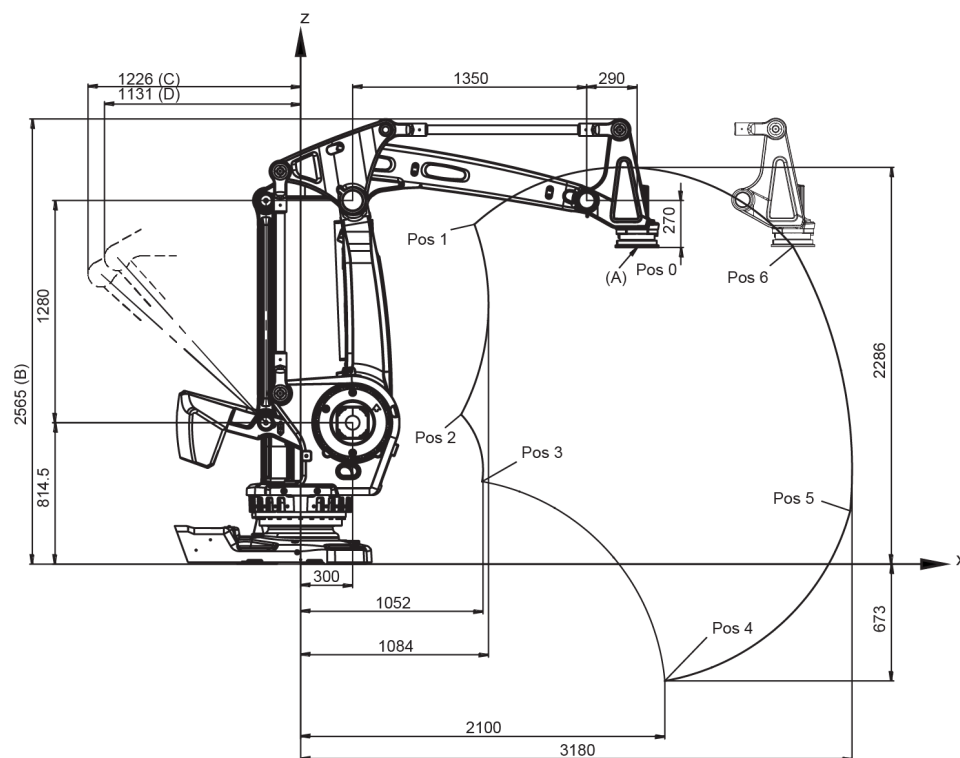

xx2000000272

Pos	Description
A	Tool flange center
B	Max working range 3027 mm
C	Mechanical stop
D	Max working range

Positions at wrist center

Pos no. see Figure 16	X Position (mm)	Z Position (mm)	Axis 2 Angle (degrees)	Axis 3 Angle (degrees)
0	1940	1824,5	0	0
1	1002	1957	-42	-20
2	925	862	-42	28
3	896	198	50	120
4	1190	-513	85	120
5	3169	307	85	15
6	2839	1829	50	-20

1 Description


1.8.2 Performance according to ISO 9283

1.8.2 Performance according to ISO 9283

General

At rated maximum load, maximum offset and 1.6 m/s velocity on the inclined ISO test plane, with all six axes in motion. Values in the table below are the average result of measurements on a small number of robots. The result may differ depending on where in the working range the robot is positioning, velocity, arm configuration, from which direction the position is approached, the load direction of the arm system. Backlashes in gearboxes also affect the result.

The figures for AP, RP, AT and RT are measured according to figure below.

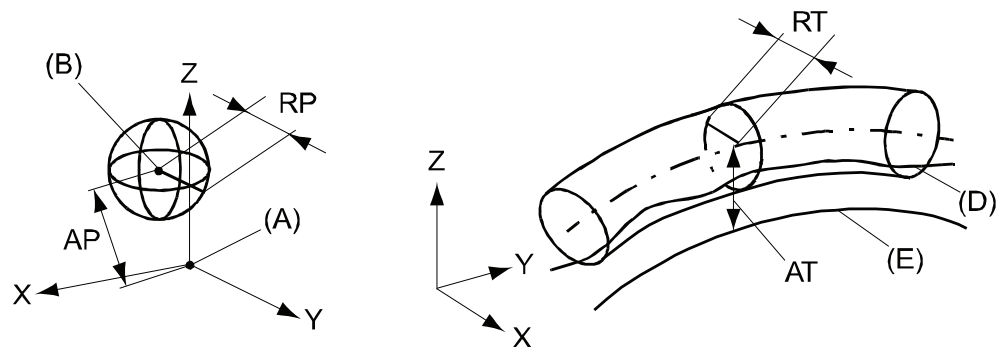

xx0800000424

Pos	Description	Pos	Description
A	Programmed position	E	Programmed path
B	Mean position at program execution	D	Actual path at program execution
AP	Mean distance from programmed position	AT	Max deviation from E to average path
RP	Tolerance of position B at repeated positioning	RT	Tolerance of the path at repeated program execution

Description	IRB 760-450/3.2 IRB 760-445/3.2
Pose accuracy, AP ^a (mm)	0.20
Pose repeatability, RP (mm)	0.05
Linear path repeatability, RT (mm)	0.80
Linear path accuracy, AT (mm)	3.30
Pose stabilization time, PSt (s) to within 0.5 mm of the position	0.13

a. AP according to the ISO test above, is the difference between the taught position (position manually modified in the cell) and the average position obtained during program execution.

The above values are the range of average test results from a number of robots.

1.8.3 Velocity

Maximum axis speeds

Axis No.	IRB 760-450/3.2 IRB 760-445/3.2
1	85°/s
2	85°/s
3	85°/s
6	160°/s

There is a supervision function to prevent overheating in applications with intensive and frequent movements.

1 Description

1.8.4 Robot stopping distances and times

1.8.4 Robot stopping distances and times

Introduction

The stopping distances and times for category 0 and category 1 stops, as required by EN ISO 10218-1 Annex B, are listed in *Product specification - Robot stopping distances according to ISO 10218-1 (3HAC048645-001)*.

1.9 Customer connections

1.9.1 Introduction

General

Depending on the choice of options above the Customer connection will have different content. The choice of routing will not affect the content. See tables for signal content below.

For further information of the customer connection, see Specification of Variants and Options, Application interface Connection type.

Media & Communication, Ethernet, parallel communication and air

Type	Application	Specification	Connection type	Supplier Article No.	Comment
Functional Earth (FE)		10mm ²	M8 Cable lug		
Power (CP)	Utility power	4x0.75mm ² (5A/250VAC)	3-module Harting, shell size 10B, EE	Female, EE, 8 pin9 140 083 101	1x0.75mm ² protective earth
Signals (CS)	Parallel communication	16x AWG24 + 10x AWG24 (50V/1A)	3-module Harting, shell size 10B, HD+EE	Female, HD, 25 pin9 140 253 101	4 quad twisted, 5 screened pair twisted
Air (AIR)	Utility air	2x12.7 (1/2") P _{Nom} = 16 bar	Parker Push-lock, 1/2" M22x1,5 Brass 24 degree seal		
Bus communication (BUS)	Ethernet/IP, PROFINET	4x0.4mm ²	M12, 4-poles, D-coded, male	Harting 21038821425	Ethernet CAT5e 100 Mbit ¹ .

Media & Communication, DeviceNet/Profibus, parallel communication and air

Type	Application	Specification	Connection type	Harting Article No.	Comment
Power (CP)	Utility power	4x0.75mm ² (5A/250VAC)	3-module Harting, shell size 10B, EE	Female, EE, 8 pin9 140 083 101	1x0.75mm ² protective earth
Signals (CS)	Parallel communication	16x AWG24 + 10x AWG24 (50V/1A)	3-module Harting, shell size 10B, HD+EE	Female, HD, 25 pin9 140 253 101	4 quad twisted, 5 screened pair twisted
Bus Communication (BUS)	Profibus	2xAWG26, Z=150 Ohm (1MHz)	3-module Harting, shell size 10B, DD	Female, DD, 12 pin9 140 123 101	
	CANBus	2xAWG26, Z=120 Ohm (1MHz)			
	BUS power & BUS utility	2x2 AWG24			

¹ Ethernet with wire colors according to PROFINET standard

Continues on next page

1 Description

1.9.1 Introduction

Continued

Type	Application	Specification	Connection type	Harting Article No.	Comment
Air (AIR)	Utility air	2x12.7 (1/2") P _{Nom} = 16 bar	Parker Push-lock, 1/2" M22x1,5 Brass 24 degree seal		

1.10 Maintenance and troubleshooting

1.10.1 Introduction

General

The robot requires only minimum maintenance during operation. It has been designed to make it as easy to service as possible:

- Maintenance-free AC motors are used
- Oil is used for the gear boxes
- The cabling is routed for longevity, and in the unlikely event of a failure, its modular design makes it easy to change

Maintenance

The maintenance intervals depend on the use of the robot, the required maintenance activities also depends on selected options. For detailed information on maintenance procedures, see Maintenance section in the Product Manual.

This page is intentionally left blank

2 Specifications of variants and options

2.1 Introduction to variants and options

General

The different variants and options for the IRB 760 are described in the following sections. The same option numbers are used here as in the specification form.

The variants and options related to the robot controller are described in the product specification for the controller.

2 Specifications of variants and options

2.2 Manipulator

2.2 Manipulator

Variants

Option	IRB Type	Handling capacity (kg)	Reach (m)
435-106	760	450	3.18
435-144 (only for press tend- ing applica- tion)	760	445	3.18

Manipulator color

Option	Color	RAL code ⁱ
209-2	ABB white standard	RAL 9003
209-201	NCS 2070-Y60R Orange	NCS 2070-Y60R
209-202	ABB Graphite White std Standard color	RAL 7035
209	RAL code should be specified (ABB non-standard colors)	

ⁱ The colors can differ depending on supplier and the material on which the paint is applied.



Note

Notice that delivery time for painted spare parts will increase for ABB none standard colors.

Protection

Option	Description
287-4	Standard

Media & Communication

Air supply and signals for extra equipment upper arm, see [Customer connections on page 51](#).

Option	Description	Note
803-2	Ethernet cable, parallel communication and air	Includes CP, CS, Ethernet + air
803-3	DeviceNet, parallel communication and air	Includes CP, CS and DeviceNet + air
803-4	PROFIBUS	Includes CP, CS and PROFIBUS + air

Connector kits

The kit consists of connectors, pins and sockets.


Option	Description
431-1	For the connectors on the upper arm.

Continues on next page

Option	Description
239-1	For connectors on base.


Safety lamp

Option	Description
213-1	A safety lamp with an orange fixed light can be mounted on the manipulator. The lamp is active in MOTORS ON mode. The safety lamp is required on a UL/UR approved robot.

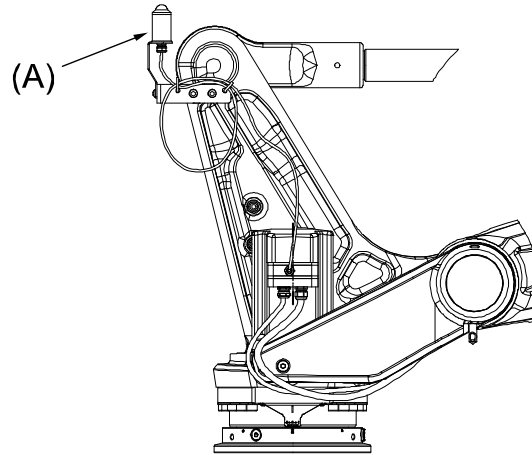

xx1000001152

Pos	Description
A	Safety lamp for IRB 760 - 450/3.2

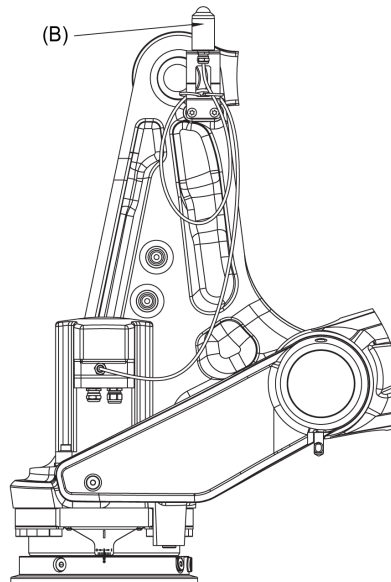

xx2000000273

Pos	Description
B	Safety lamp for IRB 760 - 445/3.2

Continues on next page


2 Specifications of variants and options

2.2 Manipulator

Continued

Fork lift device

Option	Description
159-1	Lifting device on the manipulator for fork-lift -handling.

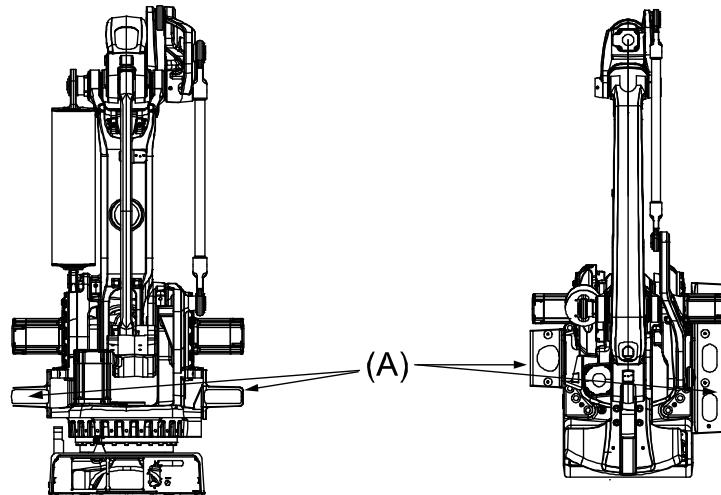

xx1000001154

Pos	Description
A	Fork lift pockets (x2)

Baseplate

Option	Description
37-1	Can also be used for IRB 7600. See Installation on page 22 for dimension drawing.

Resolver connection, axis 7

Option	Description	Note
864-1	On base	Used together with first additional drive, option 907-1.

Electronic Position Switches (EPS)

Electronic Position Switches (EPS) is an additional safety computer in the controller, with the purpose of providing safe output signals representing the position of robot axes. The output signals are typically connected to cell safety circuitry and/or a safety PLC which takes care of interlocking the robot cell, for example in order to prevent robot and operator to enter a common area simultaneously. See *Application manual - Electronic Position Switches*.

Working range limit Axis 1

To increase the safety of the robot, the working range of axis 1 can be restricted by extra mechanical stops.

Option	Type	Description
29-2	Axis 1, 7.5°	Two stops which allows the working range to be restricted in increments of 7.5°.

Continues on next page

Extended work range

Option	Type	Description
561-1	Extended work range axis 1	To extend the working range on axis 1 from $\pm 180^\circ$ to $\pm 220^\circ$. When the option is used the mechanical stop shall be removed. Requires options SafeMove or EPS (Electronic Position Switches).

**CAUTION**

The option *Extended work range* enables an extension of the working range for axis 1, through a software configuration. With this option installed, the working range can exceed the range limited by the mechanical stop on axis 1. The working range shall be limited through the option SafeMove.

A risk analysis must be done to ensure that no risks remain when using option *Extended work range*, to limit the working range, and before removing the mechanical stops.

For information about the option SafeMove, see *Application manual - Functional safety and SafeMove2*.

If the mechanical stop is removed, then the manipulator should have a marking for this, for example, a label. If the robot is delivered with the option *Extended work range*, then such a label is included on delivery.

Warranty

For the selected period of time, ABB will provide spare parts and labor to repair or replace the non-conforming portion of the equipment without additional charges. During that period, it is required to have a yearly *Preventative Maintenance* according to ABB manuals to be performed by ABB. If due to customer restrains no data can be analyzed with ABB Connected Services for robots with OmniCore controllers, and ABB has to travel to site, travel expenses are not covered. The *Extended Warranty* period always starts on the day of warranty expiration. Warranty Conditions apply as defined in the *Terms & Conditions*.

**Note**

This description above is not applicable for option *Stock warranty* [438-8]

Option	Type	Description
438-1	Standard warranty	Standard warranty is 12 months from <i>Customer Delivery Date</i> or latest 18 months after <i>Factory Shipment Date</i> , whichever occurs first. Warranty terms and conditions apply.
438-2	Standard warranty + 12 months	Standard warranty extended with 12 months from end date of the standard warranty. Warranty terms and conditions apply. Contact Customer Service in case of other requirements.

Continues on next page

2 Specifications of variants and options

2.2 Manipulator

Continued

Option	Type	Description
438-4	Standard warranty + 18 months	Standard warranty extended with 18 months from end date of the standard warranty. Warranty terms and conditions apply. Contact Customer Service in case of other requirements.
438-5	Standard warranty + 24 months	Standard warranty extended with 24 months from end date of the standard warranty. Warranty terms and conditions apply. Contact Customer Service in case of other requirements.
438-6	Standard warranty + 6 months	Standard warranty extended with 6 months from end date of the standard warranty. Warranty terms and conditions apply.
438-7	Standard warranty + 30 months	Standard warranty extended with 30 months from end date of the standard warranty. Warranty terms and conditions apply.
438-8	Stock warranty	Maximum 6 months postponed start of standard warranty, starting from factory shipment date. Note that no claims will be accepted for warranties that occurred before the end of stock warranty. Standard warranty commences automatically after 6 months from <i>Factory Shipment Date</i> or from activation date of standard warranty in WebConfig.  Note Special conditions are applicable, see <i>Robotics Warranty Directives</i>.

2.3 Floor cables

Manipulator cable length

Option	Lengths
210-2	7 m
210-3	15 m
210-4	22 m
210-5	30 m

Application interface Connection

Option	Description	
16-1	Cabinet ^a	The signals are connected to 12-pole screw terminals, Phoenix MSTB 2.5/12-ST-5.08, to the Control Module.

a) Note! In a MultiMove application, additional robots have no Control Module. The screw terminal with internal cabling are then delivered separately to be mounted in the main robot Control Module or in another encapsulation, for example a PLC cabinet.

Connection of Parallel/DeviceNet/Profibus/Ethernet connection

Following information specifies the cable length for Parallel/DeviceNet/Profibus/Ethernet connection floor cables for connections between cabinets and manipulator.

Option	Lengths
90-2/92-2/859-1/94-1	7 m
90-3/92-3/859-2/94-2	15 m
90-4/92-4/859-3	22 m
90-5/92-5/859-4/94-4	30 m

2 Specifications of variants and options

2.4 User documentation

2.4 User documentation

User documentation

The user documentation describes the robot in detail, including service and safety instructions.



Tip

All documents can be found via ABB Robotics One, <https://one.robots.abb.com/en/knowledge-hub>.

2.5 Warranty

Warranty

For the selected period of time, ABB will provide spare parts and labor to repair or replace the non-conforming portion of the equipment without additional charges. During that period, it is required to have a yearly *Preventative Maintenance* according to ABB manuals to be performed by ABB. If due to customer restrains no data can be analyzed with ABB Connected Services for robots with OmniCore controllers, and ABB has to travel to site, travel expenses are not covered. The *Extended Warranty* period always starts on the day of warranty expiration. Warranty Conditions apply as defined in the *Terms & Conditions*.



Note

This description above is not applicable for option *Stock warranty* [438-8]

Option	Type	Description
438-1	Standard warranty	Standard warranty is 12 months from <i>Customer Delivery Date</i> or latest 18 months after <i>Factory Shipment Date</i> , whichever occurs first. Warranty terms and conditions apply.
438-2	Standard warranty + 12 months	Standard warranty extended with 12 months from end date of the standard warranty. Warranty terms and conditions apply. Contact Customer Service in case of other requirements.
438-4	Standard warranty + 18 months	Standard warranty extended with 18 months from end date of the standard warranty. Warranty terms and conditions apply. Contact Customer Service in case of other requirements.
438-5	Standard warranty + 24 months	Standard warranty extended with 24 months from end date of the standard warranty. Warranty terms and conditions apply. Contact Customer Service in case of other requirements.
438-6	Standard warranty + 6 months	Standard warranty extended with 6 months from end date of the standard warranty. Warranty terms and conditions apply.
438-7	Standard warranty + 30 months	Standard warranty extended with 30 months from end date of the standard warranty. Warranty terms and conditions apply.
438-8	Stock warranty	Maximum 6 months postponed start of standard warranty, starting from factory shipment date. Note that no claims will be accepted for warranties that occurred before the end of stock warranty. Standard warranty commences automatically after 6 months from <i>Factory Shipment Date</i> or from activation date of standard warranty in WebConfig. Note Special conditions are applicable, see <i>Robotics Warranty Directives</i>.

Continues on next page

2 Specifications of variants and options

2.5 Warranty

Continued

Warranty for DressPack



Note

Option 780-3 upper arm DressPack MH3 is not covered by the warranty.

3 Accessories

3.1 Introduction to accessories

General

There is a range of tools and equipment available.

Basic software and software options for robot and PC

For more information, see *Product specification - Controller IRC5* and *Application manual - Controller software IRC5*.

This page is intentionally left blank

Index

A

accessories, 65
ambient humidity
 operation, 25
 storage, 25
ambient temperature
 operation, 25
 storage, 25

C

calibration
 standard type, 33
Calibration Pendulum, 34
category 0 stop, 50
category 1 stop, 50

D

documentation, 62
DressPack warranty, 64

E

extended working range, 59

F

fine calibration, 34
foundation
 requirements, 25

H

humidity
 operation, 25
 storage, 25

I

instructions, 62

L

loads on foundation, 24

M

manuals, 62

O

operating conditions, 25

option

 Extended working range, 59
options, 55

P

product standards, 20
protection classes, 26
protection type, 26

R

requirements on foundation, 25
robot
 protection class, 26
 protection types, 26

S

safety standards, 20
service instructions, 62
standards, 20
 ANSI, 20
 CAN, 20
 EN IEC, 20
 EN ISO, 20
standard warranty, 59, 63
stock warranty, 59, 63
stopping distances, 50
stopping times, 50
storage conditions, 25

T

temperatures
 operation, 25
 storage, 25
torques on foundation, 24

U

user documentation, 62

V

variants, 55

W

warranty, 59, 63
warranty for DressPack, 64
weight, 23



ABB Robotics Sweden AB
S-721 71 VÄSTERÅS, Sweden
Telephone +46 10-732 50 00

ABB Robotics Norway AS
Nordlysvegen 7, N-4340 BRYNE, Norway
Box 265, N-4349 BRYNE, Norway
Telephone: +47 22 87 2000

ABB Robotics (Shanghai) Limited
No. 39, 99 Miaoqiao Road,
Pudong New Area,
Shanghai, 201315, China
Telephone: +86 21 6105 6666

ABB Robotics LLC
1250 Brown Road
Auburn Hills, MI 48326
USA
Telephone: +1 248 391 9000

abb.com/robotics