



Azuus F2

Variable Volume Hi-Pressure Coolant
with Chips Filtration Systems

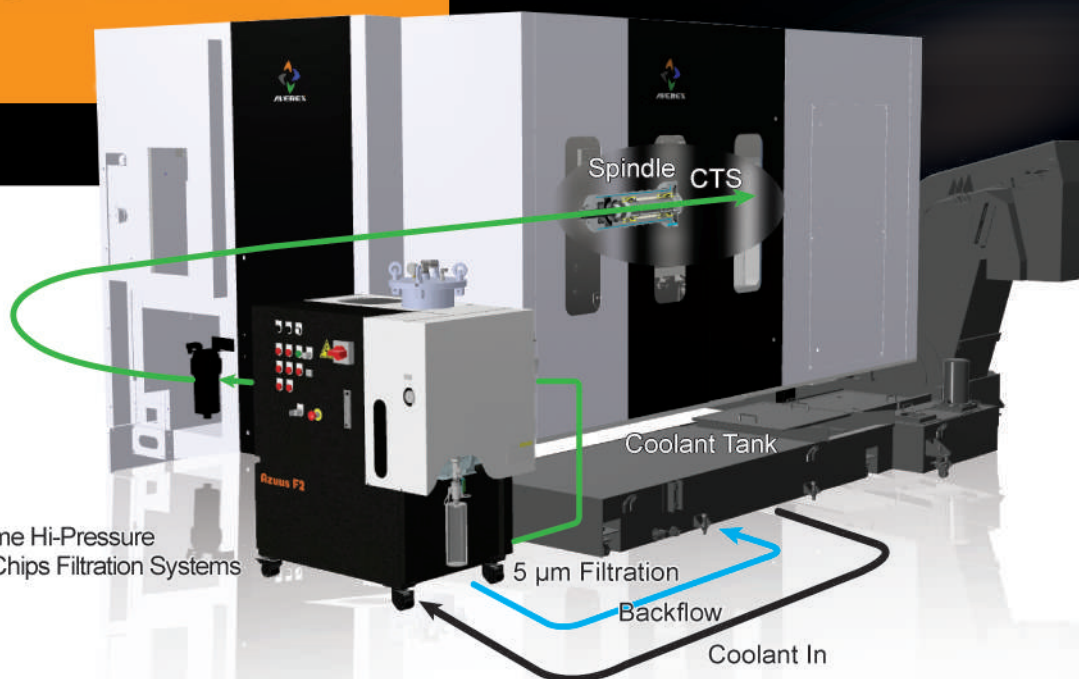

- Pressure Up to 80 bar, Variable Volume
- Vortex and Bag Filters, Filtration to 5 μ m
- Auto / Continue Chips Filtration
- Available for Water Base Coolant and All Type Material Cutting
- Longer Tools Life, Lower Maintenance Costs
- Coolant Chiller Interface Prepared

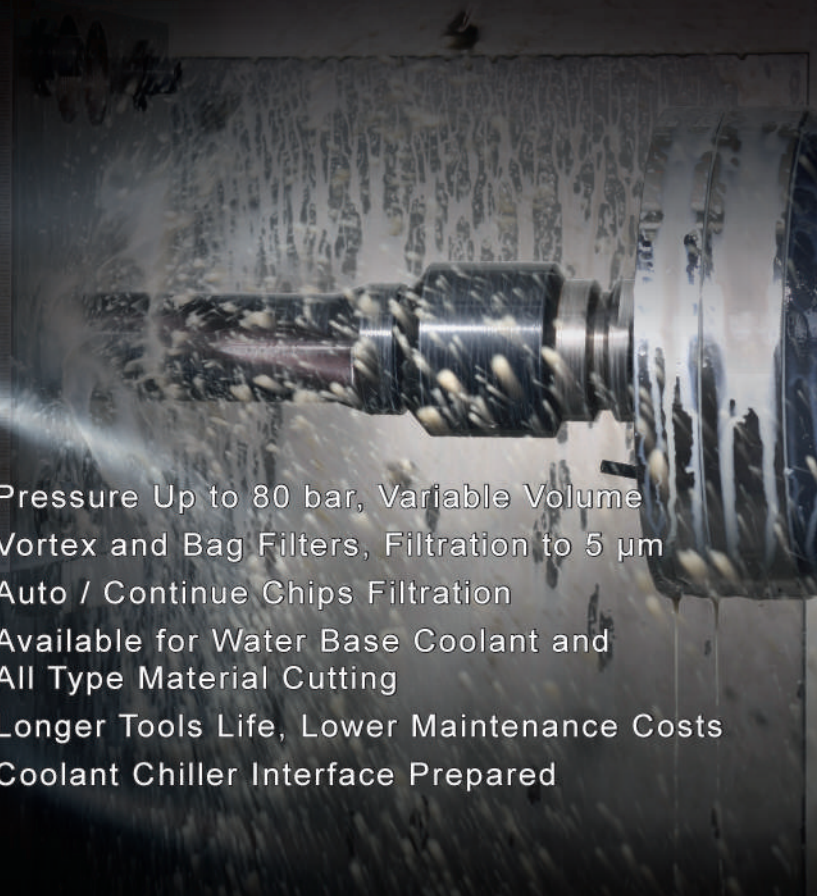

Azuus F2

Variable Volume Hi-Pressure
Coolant with Chips Filtration Systems

Specifications

Maximum Pressure 80 bar [1,160 psi]

Maximum Rated Flow 38 l/min [10 gal/min]

Number of Multiple Pressure 4

Number of Coolant Outlet 1

Number of Filter 2

Filtration Accuracy 5 μ m

Coolant Storage Capacity 130 L [34.3 gal]

Power 220V / 60Hz, 35 A

Weight 320 Kg [507 lb]

Dimension [LxWxH] 1,017 x 750 x 1,293 mm
[40" x 29.5" x 50.9"]

