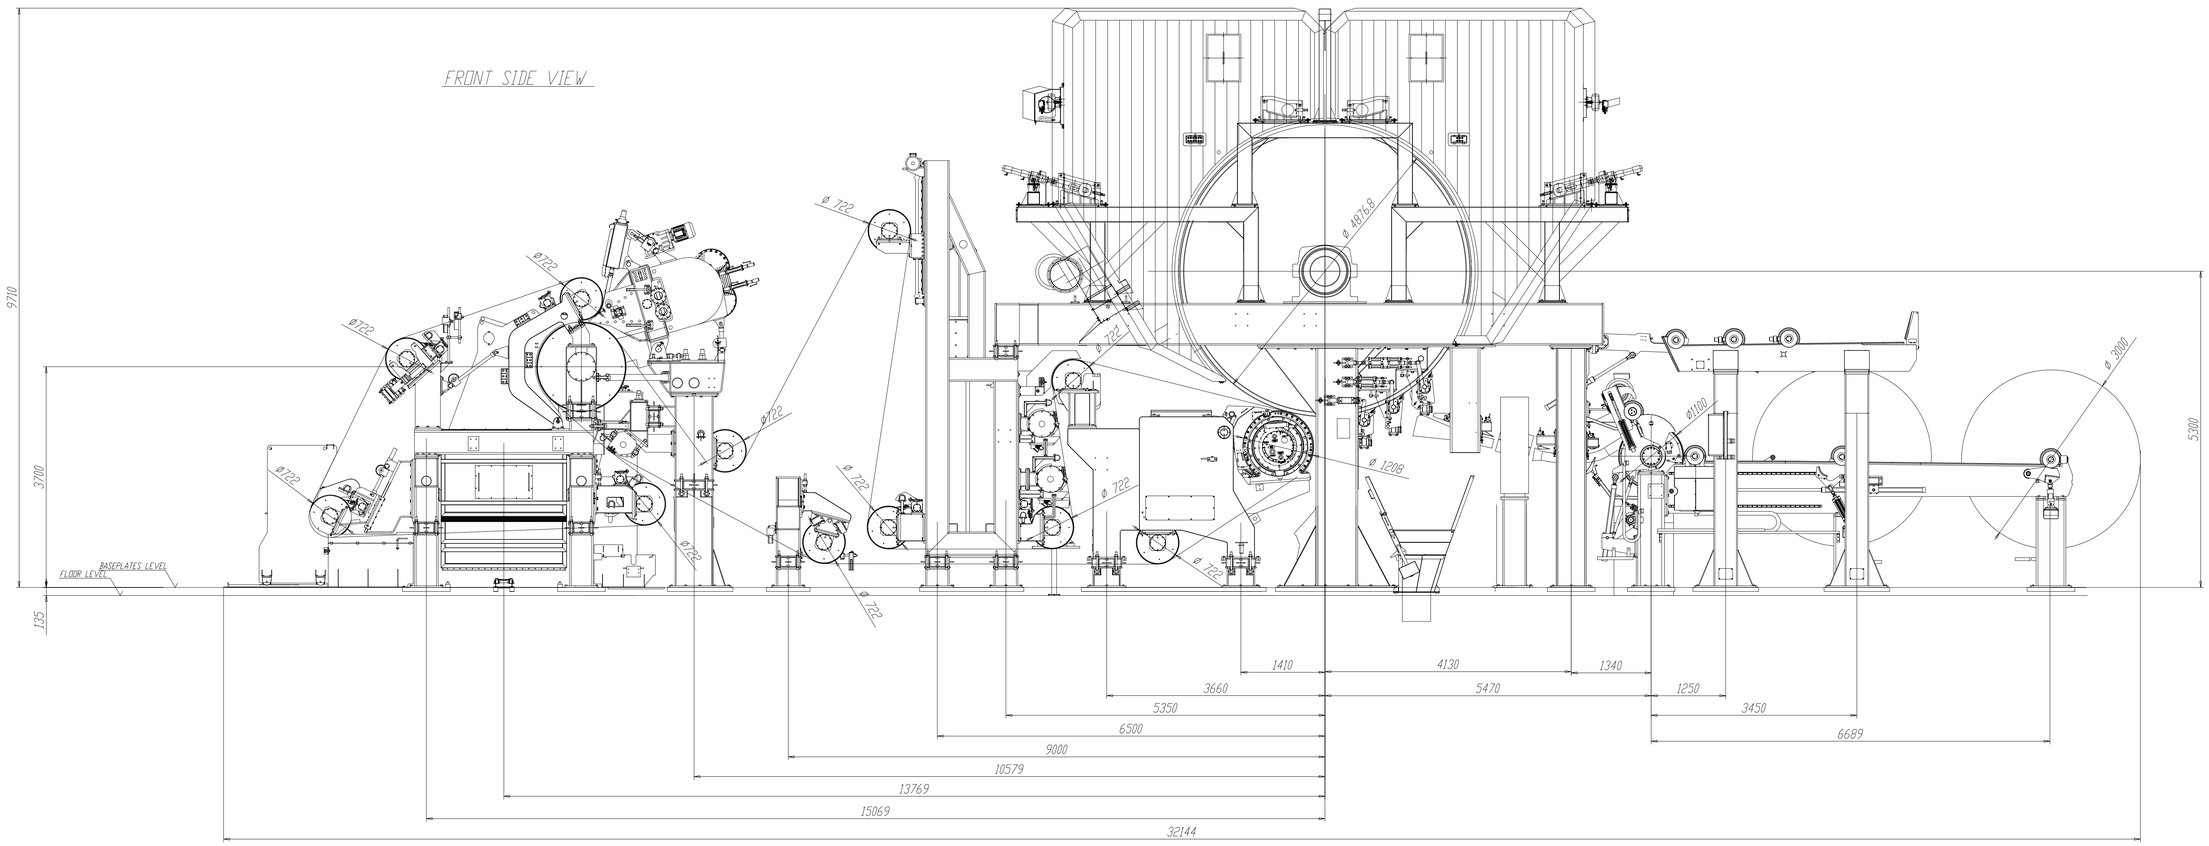

PAPER GRADES	TISSUE
REEL BASIS WEIGHT	12 ÷ 42 g/m²
REEL TRIM	3650 mm
MAX OPERATING SPEED	2000 MPM
BALANCING-DRIVE SPEED	2100 MPM
MACHINE HAND	LEFT

CUSTOMER	X	X	X
SPEDITO A (SENT TO)			
REVISIONE (REVISION)	0	1	2

LISTA DISTRIBUZIONE (DISTRIBUTION LIST)

CERTIFIED

REV.	DATE	DESCRIPTION	DRAWN
1	14-09-2011	FINAL EMISSION	FILIPPI
1	10-06-2011	ISSUED FOR COMMENTS	CERVELLI
0	09-12-2010	ISSUED FOR COMMENTS	DONATI

Geometric Tolerances	Dimension Millimeters	Tolerances Millimeters
0.03/305 mm. 0.13 mm. Max.	X.	± 1
	X.X	± 0.5
0.13/305 mm. 0.50 mm. Max.	X.XX	± 0.25
0.50 mm. Max.	X.XXX	± 0.130

Machined surface unspecified tolerances and finishes, ISO 8015

Le informazioni qui contenute sono proprieta' ACelli Paper SpA. che ne vieta diffusione e riproduzione. The information contained herein is proprietary of ACelli Paper SpA. and is not to be reproduced/communicated to a third person without the written permission of ACelli Paper SpA.

Rugosita' secondo ISO 1302

Materiale:

Massa Kg. _____ Rugosita' Ra in µm. _____

APPROVATO/Approved	DATA/Date
DONATI	09.12.2010
DISEGNATO/Drawn FILIPPI	DATA/Date 07.12.2010

ACelli paper

Huizhou Fookwoo

MACHINE LONGITUDINAL VIEW

ORDER N° 1010027

SCALA/Scale 1:50

Rivestimenti Superficiali

Trattamenti Superficiali

md1463