
## **Dimensions (Staggered Bank Mount Design)**

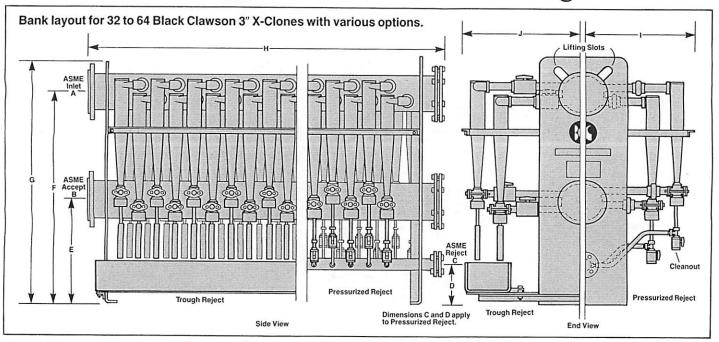


Model	Number of Cleaners		A	В	С	D	E	F	G	н	1	J	
					Pressurized Rejects						No Isolation Valves	Isolation Valves	Operating Weight
32-3-CBT	32	in. mm	10 254	10 254	3 76	10.25 260	25 635	51.44 1307	62 1575	98 2489	24 610	28 711	2100 lbs. 953 kg
40-3-CBT	40	in. mm	10 254	10 254	3 76	10.25 260	25 635	51.44 1307	62 1575	118 2997	24 610	28 711	2500 lbs. 1134 kg
48-3-CBT	48	in. mm	12 305	12 305	4 102	10.25 -260	25 635	51.44 1307	62 1575	138 3505	25 635	29 737	3100 lbs. 1406 kg
56-3-CBT	56	in. mm	12 305	12 305	4 102	10.25 260	25 635	51.44 1307	62 1575	158 4013	25 635	29 737	3500 lbs. 1588 kg
64-3-CBT	64	in. mm	12 305	12 305	4 102	10.25 260	25 635	51.44 1307	62 1575	178 4521	25 635	29 737	3900 lbs. 1769 kg

## Trial Units Available

Individual bank mounted 3" X-Clone cleaners are available for mill testing; contact your Black Clawson District Sales Manager, or Black Clawson's Middletown, Ohio, office for details. Cleaner trials can also be performed on your furnish in Black Clawson's modern, fully equipped Research Center in Middletown, Ohio.

The Black Clawson 3" X-Clone is protected by U.S. and Foreign patents.

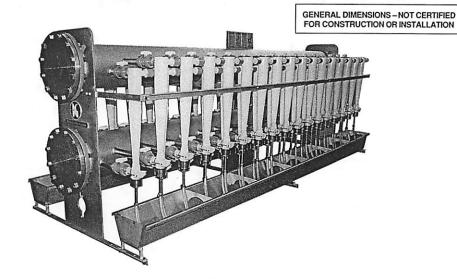



## **Black Clawson Company**

Stock Preparation Systems, Engineering, Sales and Service

**Shartle Division** 605 Clark Street Middletown, Ohio 45042 U.S.A. Phone: (513) 424-7400

Black Clawson-Kennedy Ltd. 455 Fenelon Boulevard Dorval, Quebec H9S 5T8 CANADA Phone: (514) 636-9524

Black Clawson International Ltd. Westgate Works, East Dock Road Newport, Gwent NP9 2TT South Wales, UK Phone: (44) 633-244441

Black Clawson Europe 30 Avenue Pierre Curie 33270 Floirac, Bordeaux **FRANCE** 

Excellence by Design

Phone: (33) 56 86-37-75