



FNX SERIES **FNX180** [Injection type : ① 25A ② 36A]

■ EXTERNAL VIEW

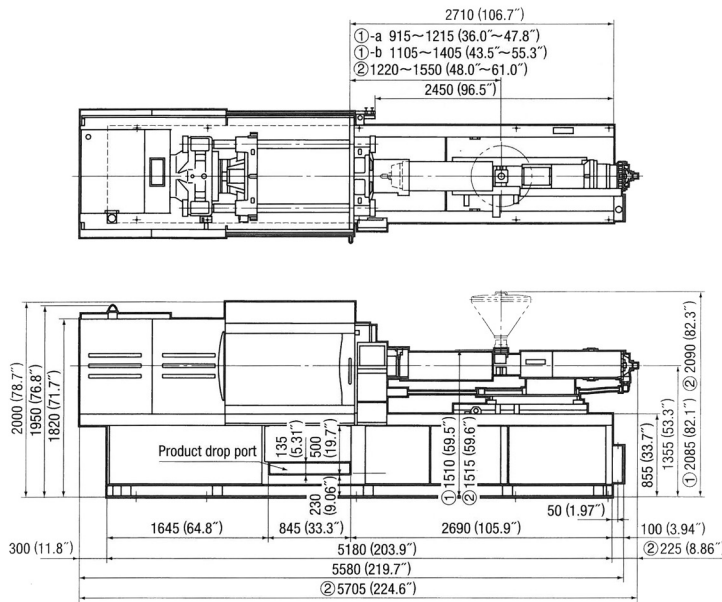


※


3-phase AC power			
230V 60Hz			
Injection type	① 25A		② 36A
	a	b	
Screw diameter	mm $\phi 36$ (in) (1.42")	$\phi 40, 45, 50$ (1.57", 1.77", 1.97")	$\phi 45, 50, 56$ (1.77", 1.97", 2.20")
Pump motor	7.5	7.5	7.5
Heater	10.54	13.01	15.53
Control	1.0	1.0	1.0
Total	kW 26.54 kVA 35.14	29.01 37.61	31.53 40.13

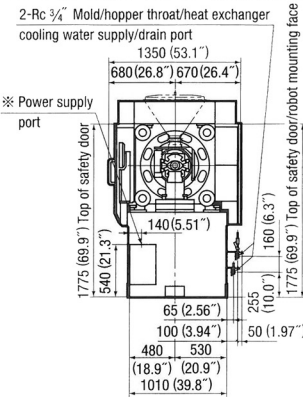

■ FOUNDATION DIAGRAM

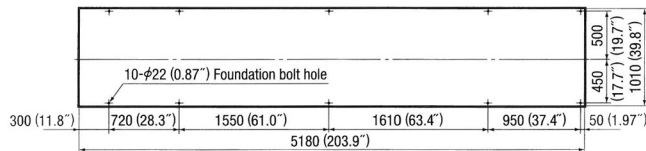


■ HOPPER FIXATION DIAGRAM



■ MOLD ATTACHMENT DIAGRAM

*The minimum mold dimensions of 375 (14.8") $\times$ 375 (14.8") are required in order to achieve the maximum clamping force.

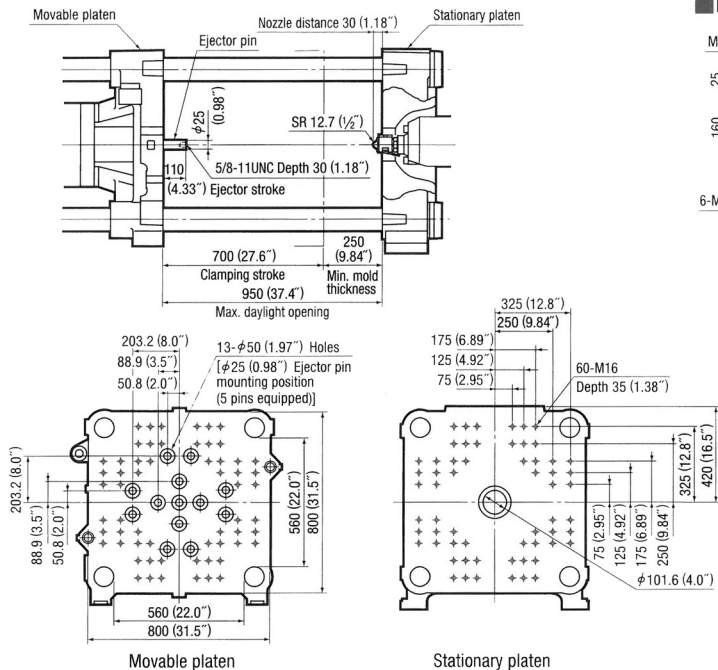

■ ROBOT FIXATION DIAGRAM

