



Batteur-mélangeur digital
Digital planetary mixer
Digitale klopper-menger





Fils renforcés.
Reinforced wires.
Versterkte onderdraden.



10 vitesses progressives.
3 programmes avec 9 étapes.
10 progressive speeds.
3 programmes with 9 stages.
10 traploze snelheden.
3 programma's met 9 stappen.



INOX 304


Inclus 3 outils.
Includes 3 tools.
Inclusief 3 werktuigen.



Goulotte d'alimentation.
Feed chute.
Invoergoot.



Capot de protection transparent amovible.
Removable transparent protective cover.
Afreembare transparante veiligheidskap



Système de verrouillage de cuve sans poignée.
Bowl lock system without handle.
Kuipvergrendeling zonder handvat.





Option racleur de cuve.
Option bowl scraper.
Optie kuipschraper.

Pied de nivellement.
Leveling foot.
Nivelleervoet.

Pied en inox.
Stainless steel base.
RVS onderstel.



Inclus chariot de cuve.
Includes bowl trolley.
Inclusief kuipwagentje.

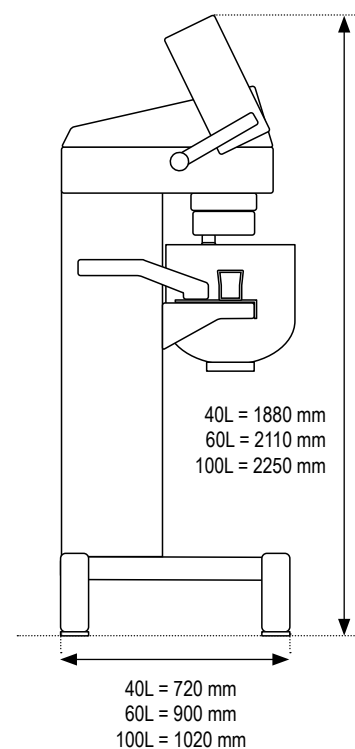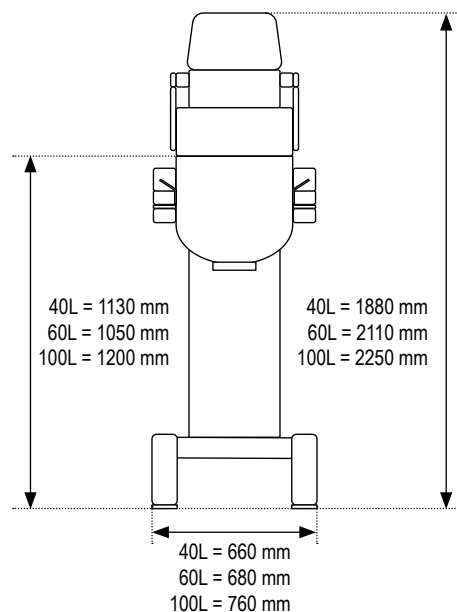

COMFO

CAPACITÉ | CAPACITY | CAPACITEIT

Trs/Min à 50 Hz | R.P.M. at 50 Hz | Omw/min bij 50 Hz
1re/10ième vitesse | 1st/10th speed | 1ste/10de snelheid

OPTION RÉDUCTION DE CUVE | OPTION BOWL REDUCTION | OPTIE REDUCTIEKUIP
et équipement - and tools - en werktuigen

POIDS NET MACHINE | NET WEIGHT MACHINE | NETTOGEWICHT MACHINE

PUISSANCE MOTEUR | MOTOR POWER | MOTORVERMOGEN

VOLTAGE | VOLTAGE | SPANNING

40L 60L 100L

40 L 60 L 100 L

65 -> 392 62 -> 379 62 -> 379

✓ 20 L ✓ 40 L ✗

280 kg 520 kg 560 kg

1,5 kW 2,5 kW 2,8 kW

230 50Hz 1Ph 3Ph x 400V 50Hz