


Cross Screen XS



- Unique sealed low friction bottom step without plastic spacers gives the highest separation of any step type screen on the market. This enables replacement of perforated screens.
- Self cleaning discharge without plastic spacers.
- Robust construction with thick bars.
- Big steps along the whole bar length ensures high conveying capacity even for big objects.
- Linkage transmission = no limitations in min or max water level.
- Solid cross beams gives high mechanical strength allowing screen widths >3m.
- Flexible mounting angle up to 60 degrees for compact installation in short channels.
- Easy adapted support legs simplifies installation and enables the screen to be pivoted up for service.
- Enclosed, safe & hygienic with easy to open access doors.

Model	A	B	C	D	E
800	825	300-600	390-690	810	1090
1100	1100	300-1100	420-1220	1110	1450
1400	1425	300-1300	420-1420	1350	1760
1700	1685	300-1400	420-1520	1600	1980
1900	1945	300-1500	420-1620	1820	2200
2100	2140	400-1800	540-1940	1950	2430
2200	2270	400-1800	560-1960	2080	2535
2400	2410	400-1800	560-1960	2210	2700
2800	2860	400-1800	560-1960	2570	3230
3100	3050	400-1800	560-1960	2750	3380
3500	3440	400-1800	560-1960	3075	3810
4000	4030	400-1800	560-1960	3595	4400
4500	4485	400-1800	580-1980	3907	4830

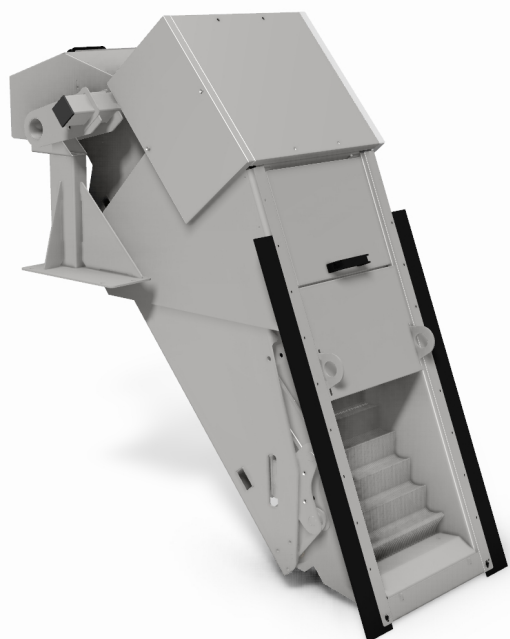