



TRAY-MATIC™




Available Options:

- **Vacuum Feed System**
(POSITIVE BLANK FEED)
- **Large Capacity Hopper**
(UP TO 400 B-FLUTE BLANKS)
- **Kwik-Change Features**
(MINIMAL USE OF HAND TOOLS)
- **Large Capacity Glue Pots**
(DOUBLE STANDARD CAPACITY)
- **Cold Glue System**
- **Automatic HSC Lidding Attachment**
(INSERTS FORMED TRAY INTO HSC COVER)
- **Double Corner-Post (BTB) Attachment**
(FORMS & SEALS THE TRAY WITH EACH CYCLE)
- **Adjustable Mandrel**
(ADJUSTABLE TO MULTIPLE TRAY SIZES)



BOX SPECIFICATIONS

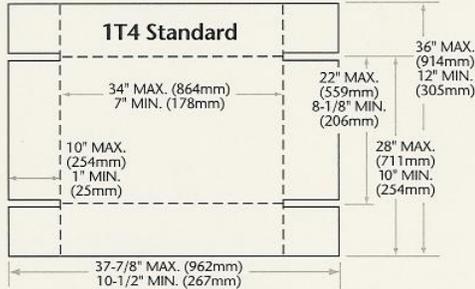

Double Corner Tray (BTB)

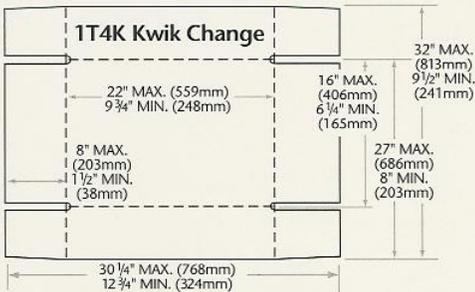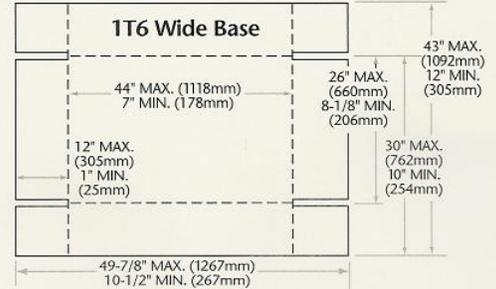

Tray with Flaps

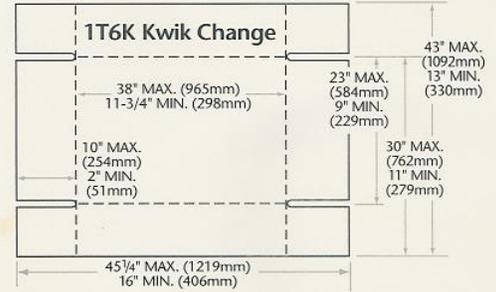



Triple End Trays

Notes: For box sizes not fitting within the standard dimensions shown here, SWF Machinery welcomes the opportunity to assist in designing a system to produce sizes which exceed production model limitations. Machine is capable of minimum and maximum dimensions as shown. However, the full range, smallest to largest, cannot be realized on an individual (single) machine.


MACHINERY SPECIFICATIONS

Models Available:

- **SWF 1T4/Standard**
- **SWF 1T6/Wide Base**
- **SWF 1T6K/Kwik Change**
- **SWF 1T4K/Kwik Change**

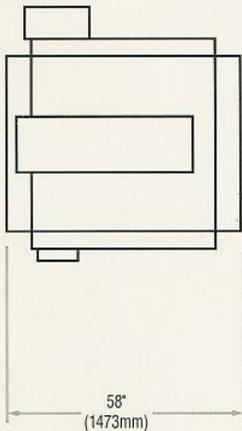

Leak-Proof Tray

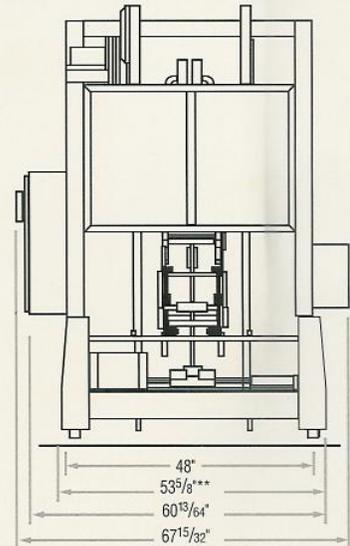

Discharge Heights: All Models 21 5/8" (549mm).



** Add 12" for Wide Base Machine.

SWF MACHINERY • 1324 Academy Ave • Sanger, California 93657
(209) 875-2545 • fax: (209) 875-9580 • toll free: (800) 344-8951
e-mail: swf@psnw.com http://www.swfmachinery.com

