



F161-8W

Wheeled pavers

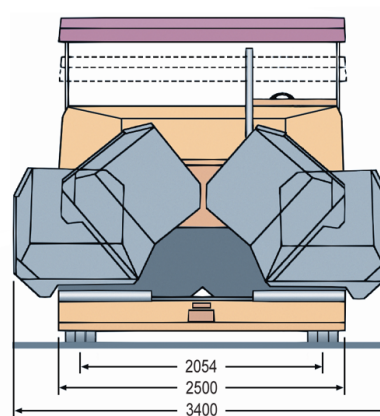

Technical data

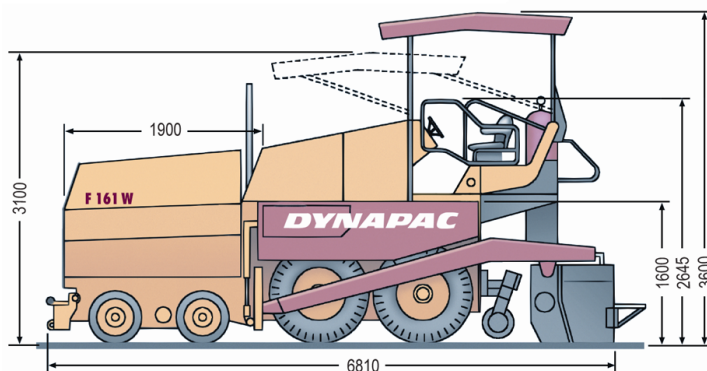

Dimensions		F161-8W
Basic width		2.55 m
Working width, hydraulic extendable		5.10 m
Working width, maximum (incl. extension boxes)		8.80 m
Capacity		
Placement thickness (max)		300 mm
Theoretical placement capacity		650 t/ h
Operation		
Operator console		Shiftable left/ right
Operator seat		Adjustable, comfortable, hydraulically sprung seat
Undercarriage		
Drive wheels		13.00R-22,5
Front wheels		560 / 300-390
Final drive		Two speed gear box with differential and differential lock
Turning radius (inside)		4,450 mm
Material hopper		
Capacity		13.10 t
Capacity		5.70 m ³
Dumping height, center		475 mm
Dumping height, outside		595 mm
Hopper width, internal		3,386 mm
Conveyor		
Conveyor type		Dual bar feeder
Conveyor width		600 mm
Conveyor control		Proportional speed control, both sides independent
Auger		
Auger diameter		380 mm
Auger control		Proportional speed control. Left and right augers to be controlled separately. Reversible direction of rotation.
Engine		
Manufacturer		Cummins
Type		QSB6.7- C205
Rated power		153 kW
Rated power		205 hp
Rated power @		1,800 rpm
Electrical system		24 V
Emissions according to		EU 3A / Tier 3

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.