


Drive Through Bath



Standard Specification:	Sizes/Models		
	Drive through bath	Enviro Wash Static	Elevated Enviro Wash
Wheel wash type/model			
Steel fabricated wash area.	●	●	●
Internal removable rumble road sections.	●	●	●
25mm water inlet (c/w ball cock fitted)	●		
Heavy duty lifting/lashing points	●	●	●
Water holding lagoon (c/w debris filters and 25mm water inlet with ball cock fitted)		●	●
Vertical spray jets (front and rear of wash area)		●	●
3 x horizontal multi spray pipes (full length of wash area)		●	●
Soil transfer directional sloping floor (to prevent soil build up)		●	●
Interceptor drip tray (6x4)		●	●
6" pump (diesel or electric)		●	●
Automated magic eye system		●	●
External ramps (if required)	●	●	●
Dimensions (feet) L x W without ramps	35 x 12	20 x 22	N/a
Dimensions (feet) L x W with ramps	75 x 12	50 x 22	80 x 22
Approx. gross weight without ramps	6.3tn	10.5	N/a
Approx. gross weight with ramps	11tn	15tn	17.5tn
Max load capacity	60tn	60tn	60tn

Optional Extras Available:	Available on		
	Drive through bath	Enviro Wash Static	Elevated Enviro Wash
Wheel wash type/model			
Upgrade max load	●	●	●
Remote lagoon		●	●
Upgrade - duel pump system		●	
Upgrade - additional spray/wash nozzles	●	●	●
Flocculent additive block holder baskets		●	●
Flocculants additive block		●	●
Corporate paint spec. (single or multi-colour)	●	●	●

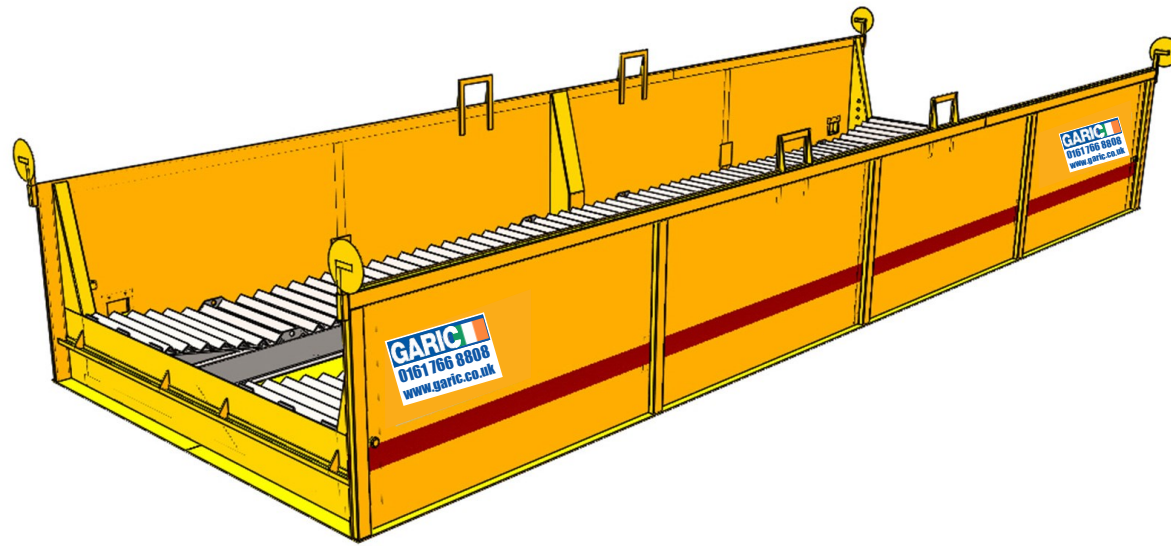

FOR SALE & FOR HIRE

Kingfisher Park, Aviation Road, Pilsworth, Bury, Lancashire BL9 8GD

T 0161 766 8808 F 0161 766 8809

Sales E salesteam@garic.co.uk Hire E hireteam@garic.co.uk

www.garic.co.uk