


One

7TS



**From the world leader
in high pressure
homogenization:
absolute quality and
reliability with advanced
technical solutions for
any process need.**

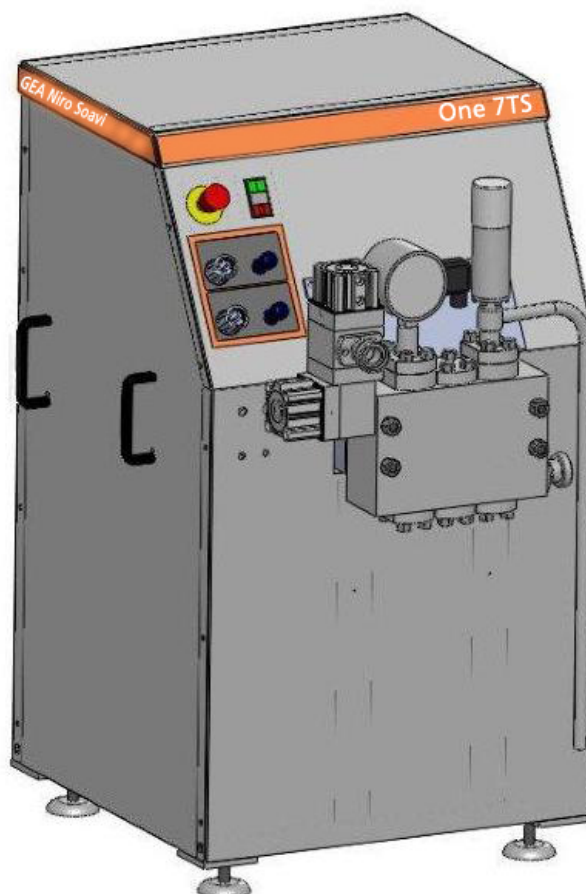

LIQUID END

Engineered with a reduced number of parts for simplified use and maintenance, features a Monoblock construction compression head made of high performance Duplex forged SS alloy, machined with CNC tooling for the highest quality standards. Parts design and surface finish guarantee a safe sanitary execution for optimized cleaning-in-place of wetted parts.

HOMOGENIZING VALVE

Accurate homogenizing pressure adjustment through pneumatically controlled valve, also available in double stage configuration for process requirements. Easily replaceable wear parts in solid tungsten carbide for extended operation.

POWER END

Heavy duty construction power drive, with steel alloy crankshaft assembled into a cast iron crankcase housing the power end components, with splash lubrication.

CASING

Complete stainless steel casing with removable panels, enclosing motor and direct belt drive transmission. The casing includes a stainless steel terminal box/electrical panel directly accessible from the outside.

TOOLS AND SPARE PARTS


O&M manual and spare parts List on CD-ROM. The standard supply includes maintenance tools and a set of emergency spare parts.

GEA Niro Soavi

Leading Pressure

One 7TS

- Designed according to the EU safety rules (CE standards), engineered, manufactured and tested according to EN ISO 9001:2000 Quality Standard
- Available in a range of capacities for operating pressure up to 250 bar
- Simple construction and reduced number of parts, for easy maintenance and cost effective operation
- Energy efficient solutions and reduced consumptions, for optimized running costs
- Easy implementation in complete process lines
- Specific configuration for defined application range in Dairy & Food, including milk and dairy by-products (pasteurized milk, flavoured milk, milk-based drinks, yoghurt drinks, milk for cheese, ice cream mixes), beverages, fruit juices, soy milk

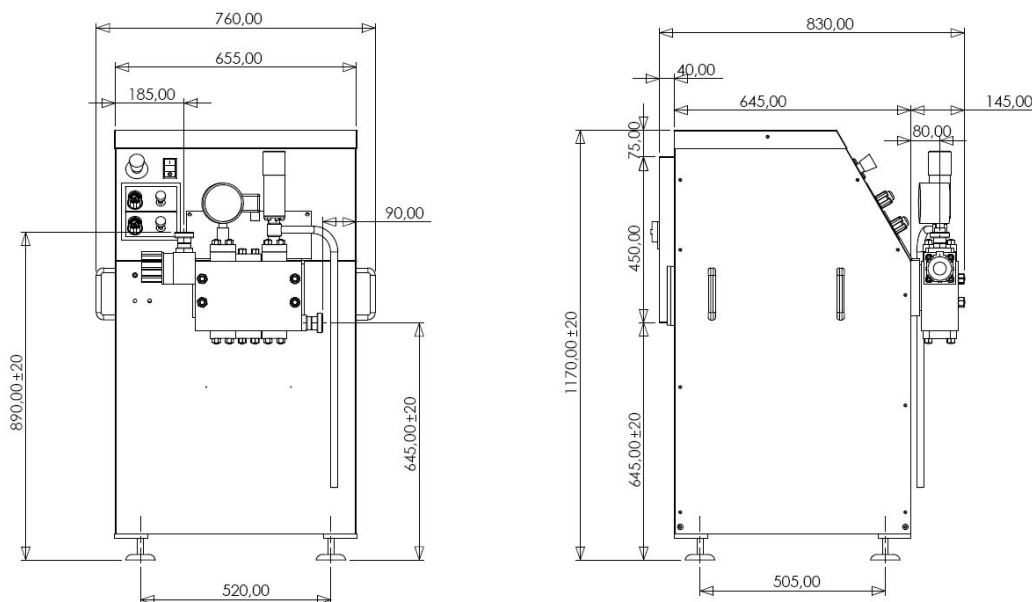

Technical specifications are not mandatory and subject to change without notice

PERFORMANCE

Pressione (bar)	Portata massima (l/h)
100	1050
130	1050
150	1050
180	1050
200	850
210	850
250	300 - 650

TECHNICAL DATA

Number of plungers	3
Stroke	40 mm
Absorbed motor power up to	7,5 kW
Weight	350 kg
Water consumption	90 l/h
Lubricating oil ISO VG 150	2,5 l

COMPRESSION HEAD

- Special forged high grade Duplex SS alloy
- Monoblock construction, rear packing access

PUMP VALVES

- SS alloy removable and reversible valve seats
- Ball type (PVB) pumping valves in SS alloy

PLUNGERS

- Chrome coated stainless steel
- Self centering clamped connection

HOMOGENIZING VALVE

- Pneumatic actuated
- Wear parts made of solid Tungsten Carbide

PRESSURE GAUGE

- Sanitary design analog high pressure gauge

PRODUCT LINE CONNECTIONS

- DIN 11851 fittings
- Tri-Clamp™ fittings

POWER END

- Rugged cast iron power frame
- Special alloy steel crankshaft on roller bearings
- Splash lubrication
- Direct belt drive

CASING

- Polished SS machine casing on stainless steel frame

MAIN OPTIONS

- 2nd stage homogenizing valve
- Electric power board for fixed capacity inside the machine casing

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
=ISO 9001/2000=

GEA Niro Soavi S.p.A.

Via A. M. Da Erba Edoari, 29 - I - 43100 PARMA ITALY
 Tel. +39 0521.965411 - Fax +39 0521.242819
 www.niro-soavi.com