




## 420/430 Series Two-Drum Slitter Rewinders

The best always wind up with Cameron.

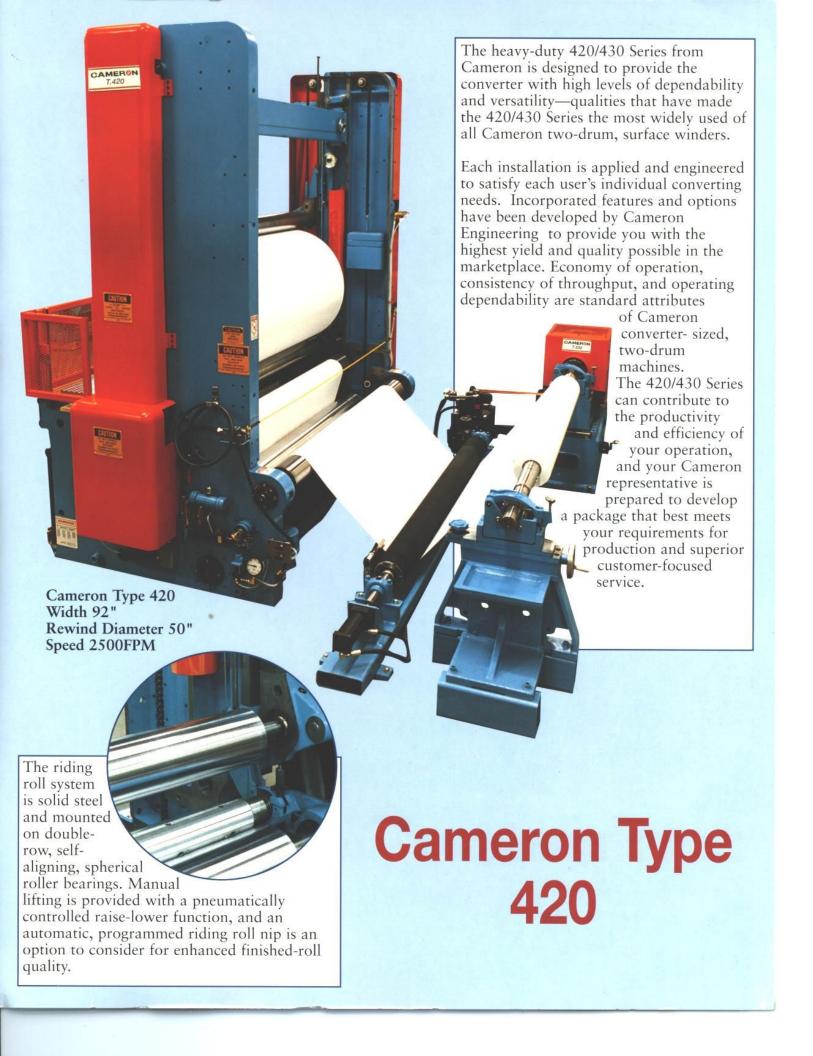

SPECIFICATIONS	CAMERON 420	CAMERON 430
	OVERALL LES THE STATE OF THE ST	OVERALL HEIGHT 32*
General parameters may be altered depending upon machine widths, operating speed, number of cuts, type of material being run, etc.	MAIN DRIVE  TRIM WIDTH PLUS 2"  TRIM WIDTH PLUS 17*	MAIN DRIVE  TRIM WIDTH PLUS 3°  TRIM WIDTH PLUS 18°
Maximum Speed	2500 FPM	3500 FPM
Maximum Web Width	92"	102"
Maximum Rewind Diameter	50"	60" (72" Optional)
Rewind Drum Diameter	6¼"	95%6"
Riding Roll Diameter	4¾", 6¼"	<b>6</b> %"
Shaftless Rewinding	Optional	Optional
Idler or Pull Rolls	4¼" (6¼" Optional)	4%" (6½" & 8½" Optional)
Minimum Slit Width-Shear	1½" Standard (¾" Optional)	1½" Standard (¾" Optional)
Minimum Slit Width-Score	1" Standard (½" Optional)	1" Standard (½" Optional)
Type Slitting	Draw Shear, Wrap Shear, Score	Draw Shear, Wrap Shear, Score