




ESCHMANN

VP45 Suction Unit

For:
High power
Aspiration,
Operation
Rooms,
Wards,
Emergency
&
General

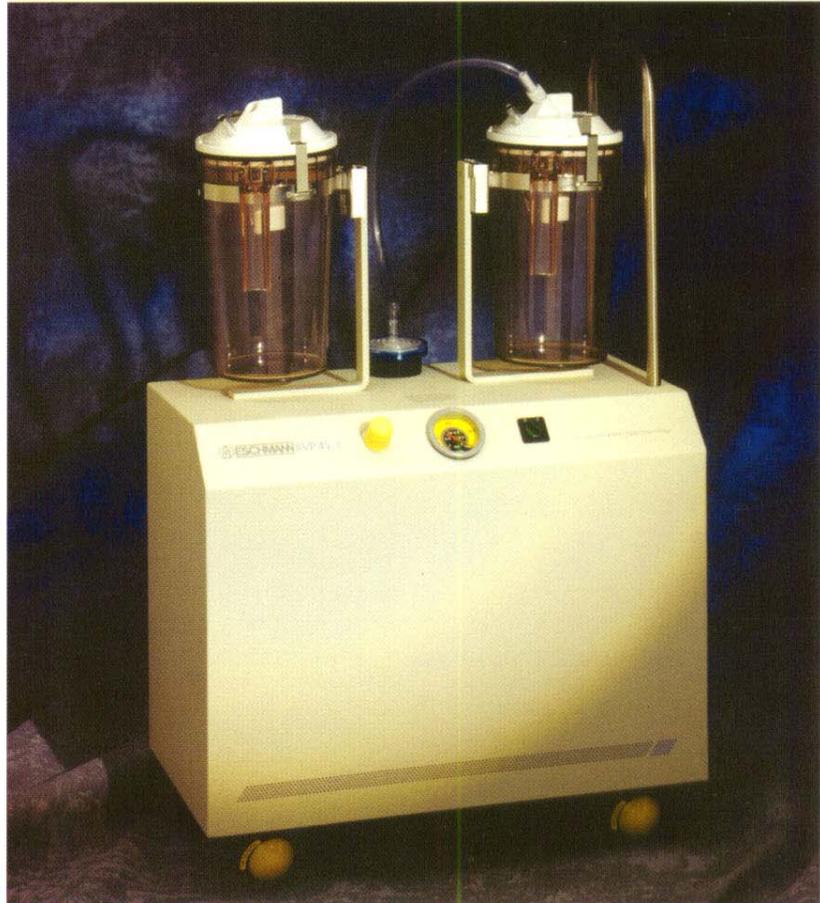

The VP45 mobile suction unit is a powerful, high performance suction unit. Versatile for most demanding operating theatre offering flow rate of 40 litres/minute in less than 6 seconds.

The jars, jar top and auto cut-off float assembly are autoclavable.

The sealed disposable bacterial filter minimizes the risk of cross-infection and protects the unit against fluid overflow.

The VP45 is available in six models:

- VP45-s Single 2-litre graduated impact-resistant jar.
- VP45-t Twin 2-litre graduated impact-resistant jars.
- VP45 as above with Four 2-litre graduated impact-resistant jars.
- All the above with only disposable jars system.

For portable model 25 litre/min., and 35 litre/min. model please refer to VP25 & VP35

VP45 Suction Unit

VP45 TECHNICAL SPECIFICATIONS

The VP45 fully conforms with standards IEC 601-1, BS5724, VDE 0750 and BS4199 Part 1, CE marked, the council directive 93/42/EEC of 14th June 1993.

Maximum vacuum	700 mm Hg (-93 kPA)
Maximum air flow rate	40 litres/min
Collection jars	One, Two or Four 2-litre polysulphone impact resistant jars. (See relevant catalogue numbers below)

VP45 disposable system Impact resistant container/s and 2-litre disposable jar/s. (picture below)

Disposable bacterial filter with micro fibre elements - 3 pieces

Overall dimensions

Height	830 mm
Width	510 mm
Depth	320 mm
Typical Nett Weight	34 kg

Package dimensions

Height	920 mm
Width	620 mm
Depth	430 mm
Typical Gross Weight	40 kg

Quality control test certificate supplied with each unit.



Ordering Information

Catalogue No.	Description
82-300-56-9999	VP45s Mobile Suction Unit with one 2-litre impact-resistant jar 200-240V a.c 50/60Hz
82-300-56	VP45s disposable system only
82-300-60-9999	VP45t Mobile Suction Unit with two 2-litre impact-resistant jars
82-300-60	VP45t disposable system only
82-300-72-9999	VP45 Mobile Suction Unit with four 2-litre impact-resistant jars
82-300-72	VP45 disposable system only

Eschmann Equipment, Peter Road, Lancing, West Sussex, BN15 8TJ, England.
Tel: +44 (0) 1903 753322. Fax: +44 (0) 1903 766793. <http://www.eschmann.co.uk>

The details given in this leaflet are correct at the time of going to press. The Company, however, reserves the right to improve the equipment shown. The Eschmann name & logo are registered trade marks of Eschmann Holdings Ltd PS 151 10/2002