SELLICK

STM SERIES II/III

5500 - 7000 lbs Capacity



www.sellickequipment.com



» EFFICIENCY ON THE MOVE »

STM SERIES II/III



Introducing the Sellick STM Series II/III truck-mounted forklift. With a focus on operation, service and affordability the STM Series II/III is the solution for all your operation's logistical needs.

The STM Series II/III maintains the quality and durability of previous models while including innovations created from insights in real world applications. This is backed by unparalleled customer support including a 2 year warranty program fulfilled by our self-servicing dealer network.

After countless discussions with crew managers, operator's, and company owner's we've focused on creating a machine that excels in all areas.

Some key features include:

- **Operator Experience** - Excelling in comfort, visibility and safety to provide a seamless working experience.
- **On The Job** - Quick and simple mounting/dismounting for delivery to the jobsite.
- **Company Owners** - A lighter more affordable machine that fits on a wider variety of existing trucks and trailers.



EASE ON THE OPERATOR



Comfortable and Safe Operator Expererience

- Optimized visibility
- Lower sound levels
- Ergonomic controls
- Ease of operation with automotive control
- System display provides daily walk-around assistance and information on machine status
- Platform meets or exceeds ANSI B56.14 ROPS/FOPS safety standards

ROPS Certified Enclosure



System Display and Controls



Visibility





EFFICIENCY ON THE JOB



Mounting and Transport

- Extensive weight reduction from previous models, allowing for smooth, efficient transport
- Fits a wider variety of trucks and trailers with existing mount systems
- Standing Start System enables starting the machine from the ground while the truck is mounted, providing the opportunity to preheat in colder climates and relax the chains for dismounting
- The patented Sellick Quick-Clip system allows for fast and easy transport chain adjustment when mounting to different trucks and trailers
- 3rd brake light reduces up to 30% of rear end accidents while in transport



Standing Start System



3rd Brake Light




Quick-Clip Transport Chain



Engine

- KOHLER KDI 1903TCR Tier 4, 56 HP, direct injection diesel engine
- Exceptional low end torque
- No exhaust aftertreatment, Diesel Particulate Filter (DPF) or Diesel Exhaust Fluid (DEF) required
- Cold weather preheat and starting aid

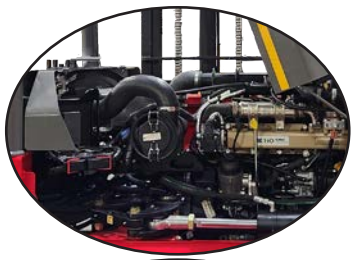

Drive System

- Trac-Loc hands-free traction control
- Full-time anti-stall
- Automotive controls with inching/brake pedal for precise control




On-Board Diagnostics Display

- A multi-function LCD digital display that includes fuel level, engine coolant temperature, system voltage, rpm and hour meter reading
- Real-time system diagnostics that delivers clear text formatted messages for troubleshooting, operational guidance and maintenance reminders
- Selectable Drive Modes (Basic, Normal, Advanced and Performance) tailor machine performance to the application and operating conditions



Filter Access and Drip Pan

- Easily removable panel
- Provides easy access for service and maintenance
- Built-in drip pan

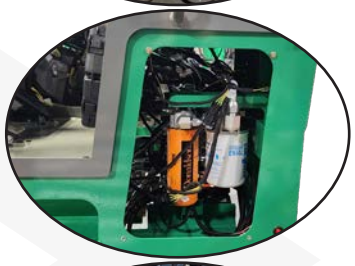


Mast Bearings

- Reliable mast bearing design in a lighter, compact form
- Rubstrips that keep bearing pathways protected from debris
- Easier access for service, reducing bearing replacement cost
- Greaseable bearings for extended service life




Hood Design

- Combined hood and rear panel opening allows for easy access to the engine and components
- Tapered to improve visibility

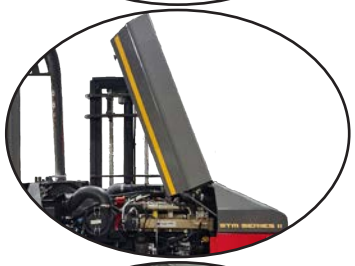

Directional Rocker Pedal Option

- Effortlessly switch between forward and reverse with a simple toe-heel motion keeping the operator's hands free to focus on steering and mast controls.
- Combine it with the optional European hydraulic lever sequence to allow an easier fit in mixed fleets

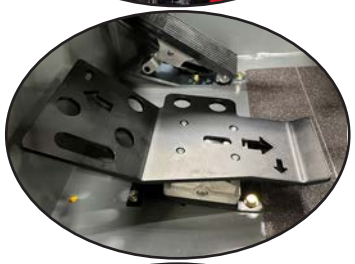

All-Weather Enclosed Cab Option

- Industry leading enclosed cab with heater and windshield wiper provides increased comfort and visibility in cold or wet conditions.
- Dual sliding side windows provide adjustable airflow, and easy communication with jobsite personnel.



TECHNICAL SPECIFICATIONS





4-Way


A one-touch button seamlessly switches from standard to 4-Way mode, enabling the multi-directional capability needed to handle long loads in tight spaces.




Model	Ref	STM55A SERIES II			STM55A-4W SERIES II	
		80" Lift	120" Lift	144" Lift	120" Lift	144" Lift
Lift capacities @ 24" load center		5,500 lbs/2,495 kg			5,500 lbs/2,495 kg	
Base operating weight (without forks)		5,760 lbs/2,613 kg	6,025 lbs/2,733 kg	6,175 lbs/2,801 kg	6,895 lbs/3,128 kg	7,045 lbs/3,196 kg
Overall length (without forks)	A	98"/2,489 mm			98"/2,489 mm	
Overall length (with forks)	A^2	114"/2,895 mm			114"/2,895 mm	
Overhang		60"/1,524 mm			60"/1,524 mm	
Standard overall width	B	100.5"/2,553 mm			101"/2,565 mm	
Overall width without forks (4W mode)	B^2	-			97"/2,464 mm	
Overall width with 48" forks (4W mode)	B^3	-			111"/2,819 mm	
Height to top of OHG	C	101"/2,565 mm			103"/2,616 mm	
Frame opening	D	60"/1,524 mm			58.5"/1,486 mm	
Outside turning radius (standard)		108"/2,743mm			108"/2,743mm	
Mast underclearance	E	12"/305 mm	10"/254 mm	10"/254 mm	10"/254 mm	
Mast sideshift		6"/152 mm				
Mast tilt - forward	F	12°				
Mast tilt - rearward	G	8°				
Gradeability		25%				
Wheelbase	H	66"/1,676 mm				
Tire size - front/rear		31x15.5/31x15.5			31.5x13/31x15.5	
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant				
Engine type		Diesel, turbocharged, electronic				
Cylinders		3				
Engine output		56 hp				
Transmission type		Hydrostatic				


Because of our constant dedication to product improvemet, all specifications are subject to change without notice.

-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-

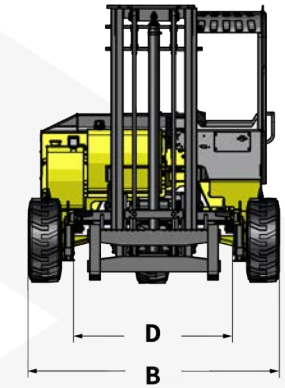

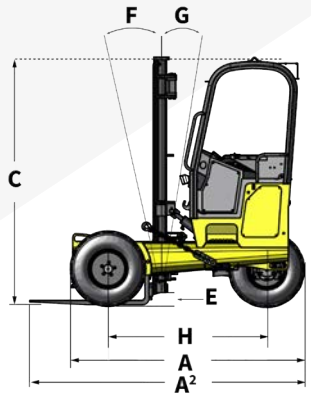

STM55-4W



TECHNICAL SPECIFICATIONS




Pantograph


The pantograph reach model allows loading and unloading from the same side of the truck or trailer, improving safety and operational efficiency.




Model	Ref	STM55A-PR SERIES III		STM55A-4WPR SERIES III	
		120" Lift	144" Lift	120" Lift	144" Lift
Lift capacities @ 24" load center		5,500 lbs/2,495 kg		5,500 lbs/2,495 kg	
Base operating weight (without forks)		7,645 lbs/3,468 kg	7,840 lbs/3,556 kg	8,240 lbs/3,738 kg	8,365 lbs/3,794 kg
Overall length (without forks)	A	106"/2,692 mm		106"/2,692 mm	
Overall length (with forks)	A^2	120"/3,048 mm		122"/3,099 mm	
Overhang		74"/1,880 mm		69"/1,753 mm	
Standard overall width	B	100.5"/2,553 mm		101"/2,565 mm	
Overall width without forks (4W mode)	B^2	-		105"/2,667 mm	
Overall width with 48" forks (4W mode)	B^3	-		119"/3,023 mm	
Height to top of OHG	C	101"/2,565 mm		103"/2,616 mm	
Frame opening	D	60"/1,524 mm		58.5"/1,486 mm	
Outside turning radius (standard)		122"/3,099mm		122"/3,099mm	
Mast underclearance	E	10"/254 mm			
Mast sideshift		6"/152 mm			
Mast tilt - forward	F	12°			
Mast tilt - rearward	G	8°			
Gradeability		25%			
Wheelbase	H	74"/1,880 mm			
Tire size - front/rear (Optional)		31x15.5/31x15.5		31.5x13/31x15.5	
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant			
Engine type		Diesel, turbocharged, electronic			
Cylinders		3			
Engine output		56 hp			
Transmission type		Hydrostatic			

Because of our constant dedication to product improvemet, all specifications are subject to change without notice.
-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-

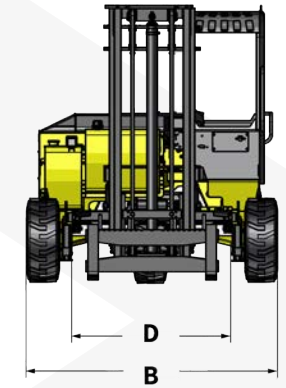

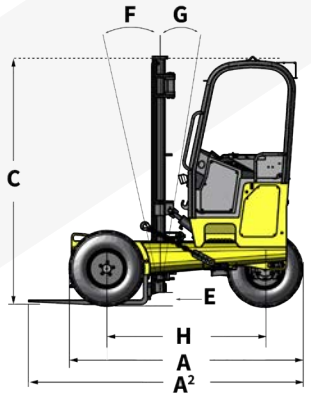

STM55-4WPR



TECHNICAL SPECIFICATIONS




STM70A

Built for higher-capacity performance, the STM70 provides a 7,000 lb lifting capability designed to support heavier loads and extended load centers.

Model	Ref	STM70A SERIES III	
		120" Lift	144" Lift
Lift capacities @ 24" load center		7,000 lbs/3,175 kg	
Base operating weight (without forks)		6,595 lbs/2,991 kg	6,705 lbs/3,041 kg
Overall length (without forks)	A	106"/2,692 mm	
Overall length (with forks)	A^2	122"/3,099 mm	
Overhang		69"/1,753 mm	
Standard overall width	B	100.5"/2,553 mm	
Height to top of OHG	C	101"/2,565 mm	
Frame opening	D	60"/1,524 mm	
Outside turning radius (standard)		122"/3,099mm	
Mast underclearance	E	10"/254 mm	
Mast sideshift		6"/152 mm	
Mast tilt - forward	F	12°	
Mast tilt - rearward	G	8°	
Gradeability		25%	
Wheelbase	H	74"/1,880 mm	
Tire size - front/rear (Optional)		31x15.5/31x15.5	
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant	
Engine type		Diesel, turbocharged, electronic	
Cylinders		3	
Engine output		56 hp	
Transmission type		Hydrostatic	

Because of our constant dedication to product improvemet, all specifications are subject to change without notice.
-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-

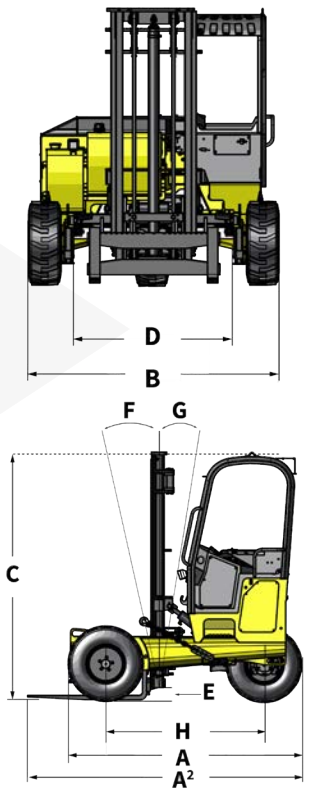

OVER HALF A CENTURY OF EXCELLENCE



Through The Years

Beginning in 1969 with the conversion of a Ford 4500 industrial tractor into a 6000 lbs outdoor forklift Sellick Equipment has grown to include an entire product line up with the support of a wide network of self servicing North American dealer locations. Now an industry leader with a rich history and a vision for the future, Sellick has and always will provide unparalleled service and support for our current and future customers.



CONQUER ANY TERRAIN



www.sellickequipment.com

SELLICK

Sellick Equipment Limited
2131 Roseborough Rd
Harrow, ON, Canada N0R 1G0
519-738-2255