SELLICK

S150



ROUGH TERRAIN FORKLIFT

15,000 lb. Capacity

Tier 4 Compliant Engine

Powershift Transmission

Powerful

Rugged

Dependable

Powered by T4 ecoMAX

Powerful - Dependable

S150 The S150 lift capacity is 15,000 lbs @ a 24" load center. Engineered with productivity and efficiency in mind, the S150 is ideal for heavy industrial applications and provides excellent fuel economy.

- **Powered by ECOMAX T4**
  74 hp, direct injection, common rail, electronic, 4 cylinder diesel engine exceeds regulatory compliance for Tier 4 Final emissions standards.
  - Ultra clean burn technology allows for no Selective Catalyst Reduction (SCR) exhaust aftertreatment fluid.
  - No Diesel Particulate Filter (DPF) needed.
  - Reduced fuel consumption.
  - High torque at low speeds (295 ft lbs @ 1,200 rpm).



- **Operator Safety & Comfort**
  - ROPS / FOPS certified overhead guard.
  - Cab is ISO mounted to reduce noise and vibration.
  - Ergonomic, automotive inspired controls for safe & efficient operation.

- **Multi-function Digital LCD Screen**
  - Fuel Level.
  - Engine Coolant Temperature.
  - System Voltage.
  - RPM and Hour Meter Reading.
  - On board diagnostics reduces downtime.

  Backlighting provides better visibility in dark conditions. Instrument panel swings forward for easy access to fuse panel.







S150

Designed to meet the demands of high hour applications.

Mast / Carriage

- Sellick SEE-THRU® all roller, sideshifting mast design gives you line-of-sight view of the forks and load.
- Integral hydraulic fork positioning carriages available. (No downrating of lift capacity.)



Transmission


Equipped with a fully automatic, four speed, Powershift Transmission.


- Power reversing.
- 2WD and 4WD options available.
- On the go 4WD engagement.



Axles


- Heavy duty rigid front axle with 12 bolt pattern.
- Torque proportioning differential.
- Enclosed oil cooled, wet disc brakes for long life.
- Rear steer axle features sealed tapered roller bearings.

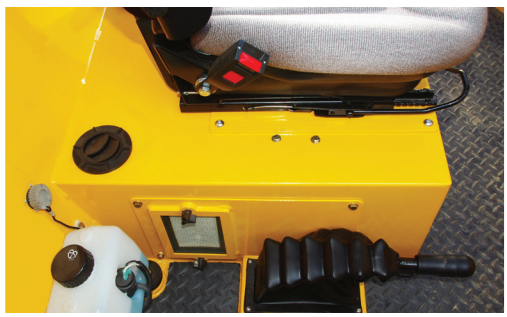

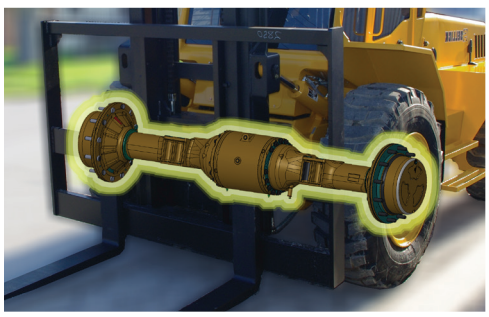



S150 ROUGH TERRAIN FORKLIFT

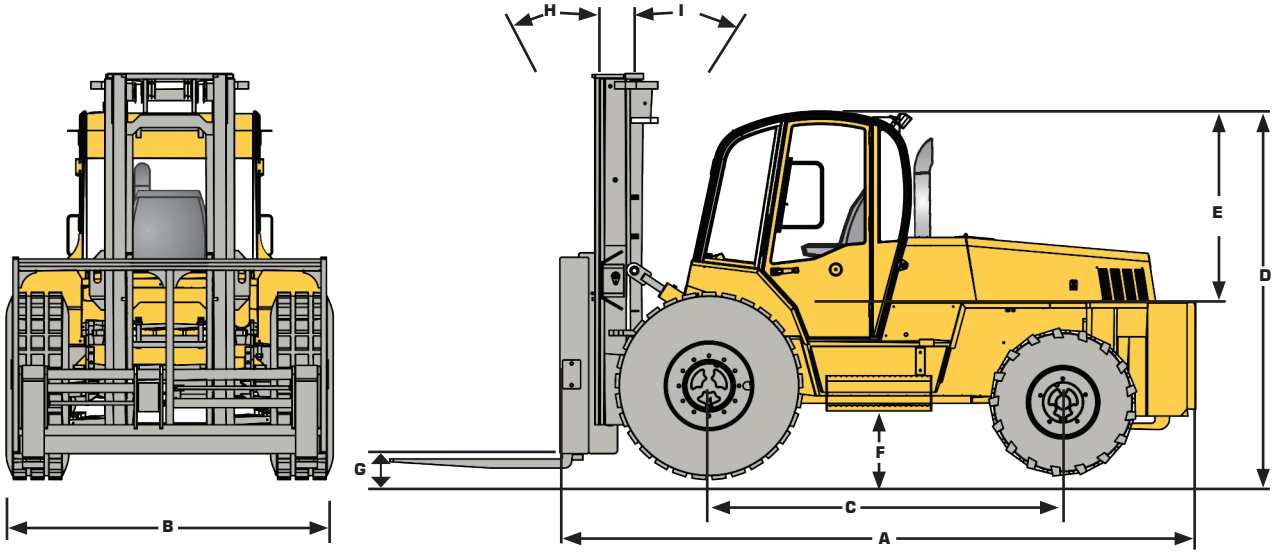

	REF	S150
Overall length	*A*	*173” / 4395 mm*
Overall width	*B*	*91” / 2311 mm*
Wheelbase	*C*	*99” / 2514 mm*
Height to top of overhead guard	*D*	*101” / 2565 mm*
Distance from seat to overhead guard	*E*	*43” / 1092 mm*
Frame underclearance	*F*	*18” / 457 mm*
Mast underclearance	*G*	*12” / 305 mm*
Mast tilt - forward	*H*	*20°*
Mast tilt - rearward	*I*	*12°*
Lift capacities @ 24” load center		*15000 lbs / 6304 kg*
Base operating weight (standard chassis & mast)		*24100 lbs / 10931 kg*
Outside turning radius		*209” / 5309 mm*
Gradeability		*25%*
Max. travel speed		*15 mph / 25 kph*
Tire size and type		*Drive : 15.5 X 25, 16 ply Steer: 340/80*
Electrical system		*Alternator - 95 A; Battery 1 000 CCA (12 volt system)*
Engine model		*ECOMAX T4*
Cylinders		*4*
Engine output (gross power)		*74 hp @ 2200 rpm*
Peak torque		*295 ft lbs @ 1200 rpm*
Transmission manufacturer & type		*PS750 Powershift*
Axles		*Front: PD87 Series Rear: S55 Series*

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

— All Sellick forklifts meet or exceed all ANSI B56.6 safety standards. —

SELLICK

Sellick Equipment Limited

P.O. Box 1000/358 Erie Street North

Harrow, Ontario, Canada N0R 1G0

519-738-2255 • sellick@mnsi.net

Visit us at www.sellickequipment.

Sold & serviced by:

2021-06

272940-B

Printed in Canada