

KIG K-Series (5 ton)




- Made in USA
- Outdoor Rated (OK for indoor too)
- Cooling Capacity: 5 Ton
 - ~60,000 BTU/hr at ~55°F water
 - ~30,000 BTU/hr at 25°F glycol
- Compressor: Scroll

- Refrigerant: R-410A (R-454b available)
- Evaporator: Brazed plate stainless steel
- Pump: Upgraded 2 HP process pump
- Tank: 30-gallon insulated
- Control: Remote mount digital control
- Safety Controls:
 - Low water flow / flow switch
 - High and low refrigerant pressure
 - Temperature sensor failure protection
 - Compressor crankcase heater
 - Compressor overload protection
 - Fan motor overload protection
 - Pump overload protection
 - Short cycle protection



Voltage	AMPS	MOPD	Dimensions (L x W x H) in	Weight lb
208/230V	27.5	40	42 x 38 x 64	509
460V	13.6	20		

- Inlet/Outlet: 1" FPT
- Ambient Control: Low and High Ambient Fan control
- Adjustable internal flow bypass valve
- Dwyer Remote Mount Control w/30ft Cable

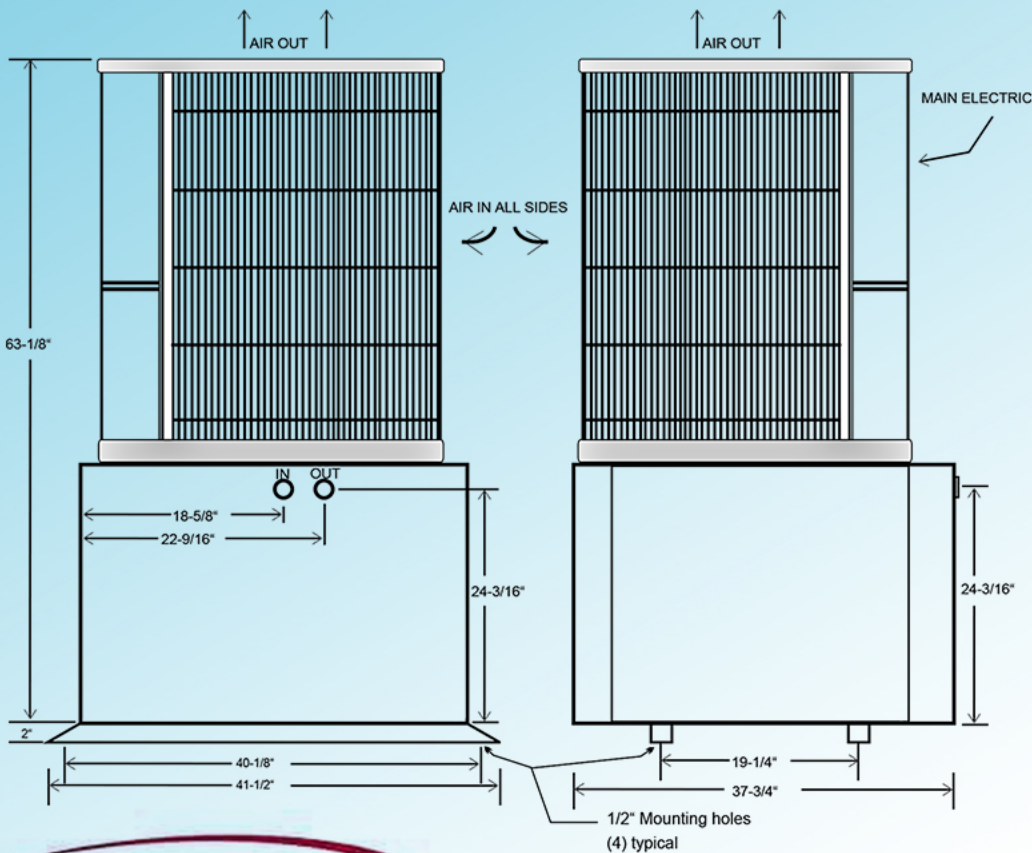

Dwyer Remote Mount Control

kig

Keith Industrial Group, Inc.
www.kigsales.com

104 Sterling St,
Clinton, MA 01510,
USA

978-514-3800
info@kigsales.com

