


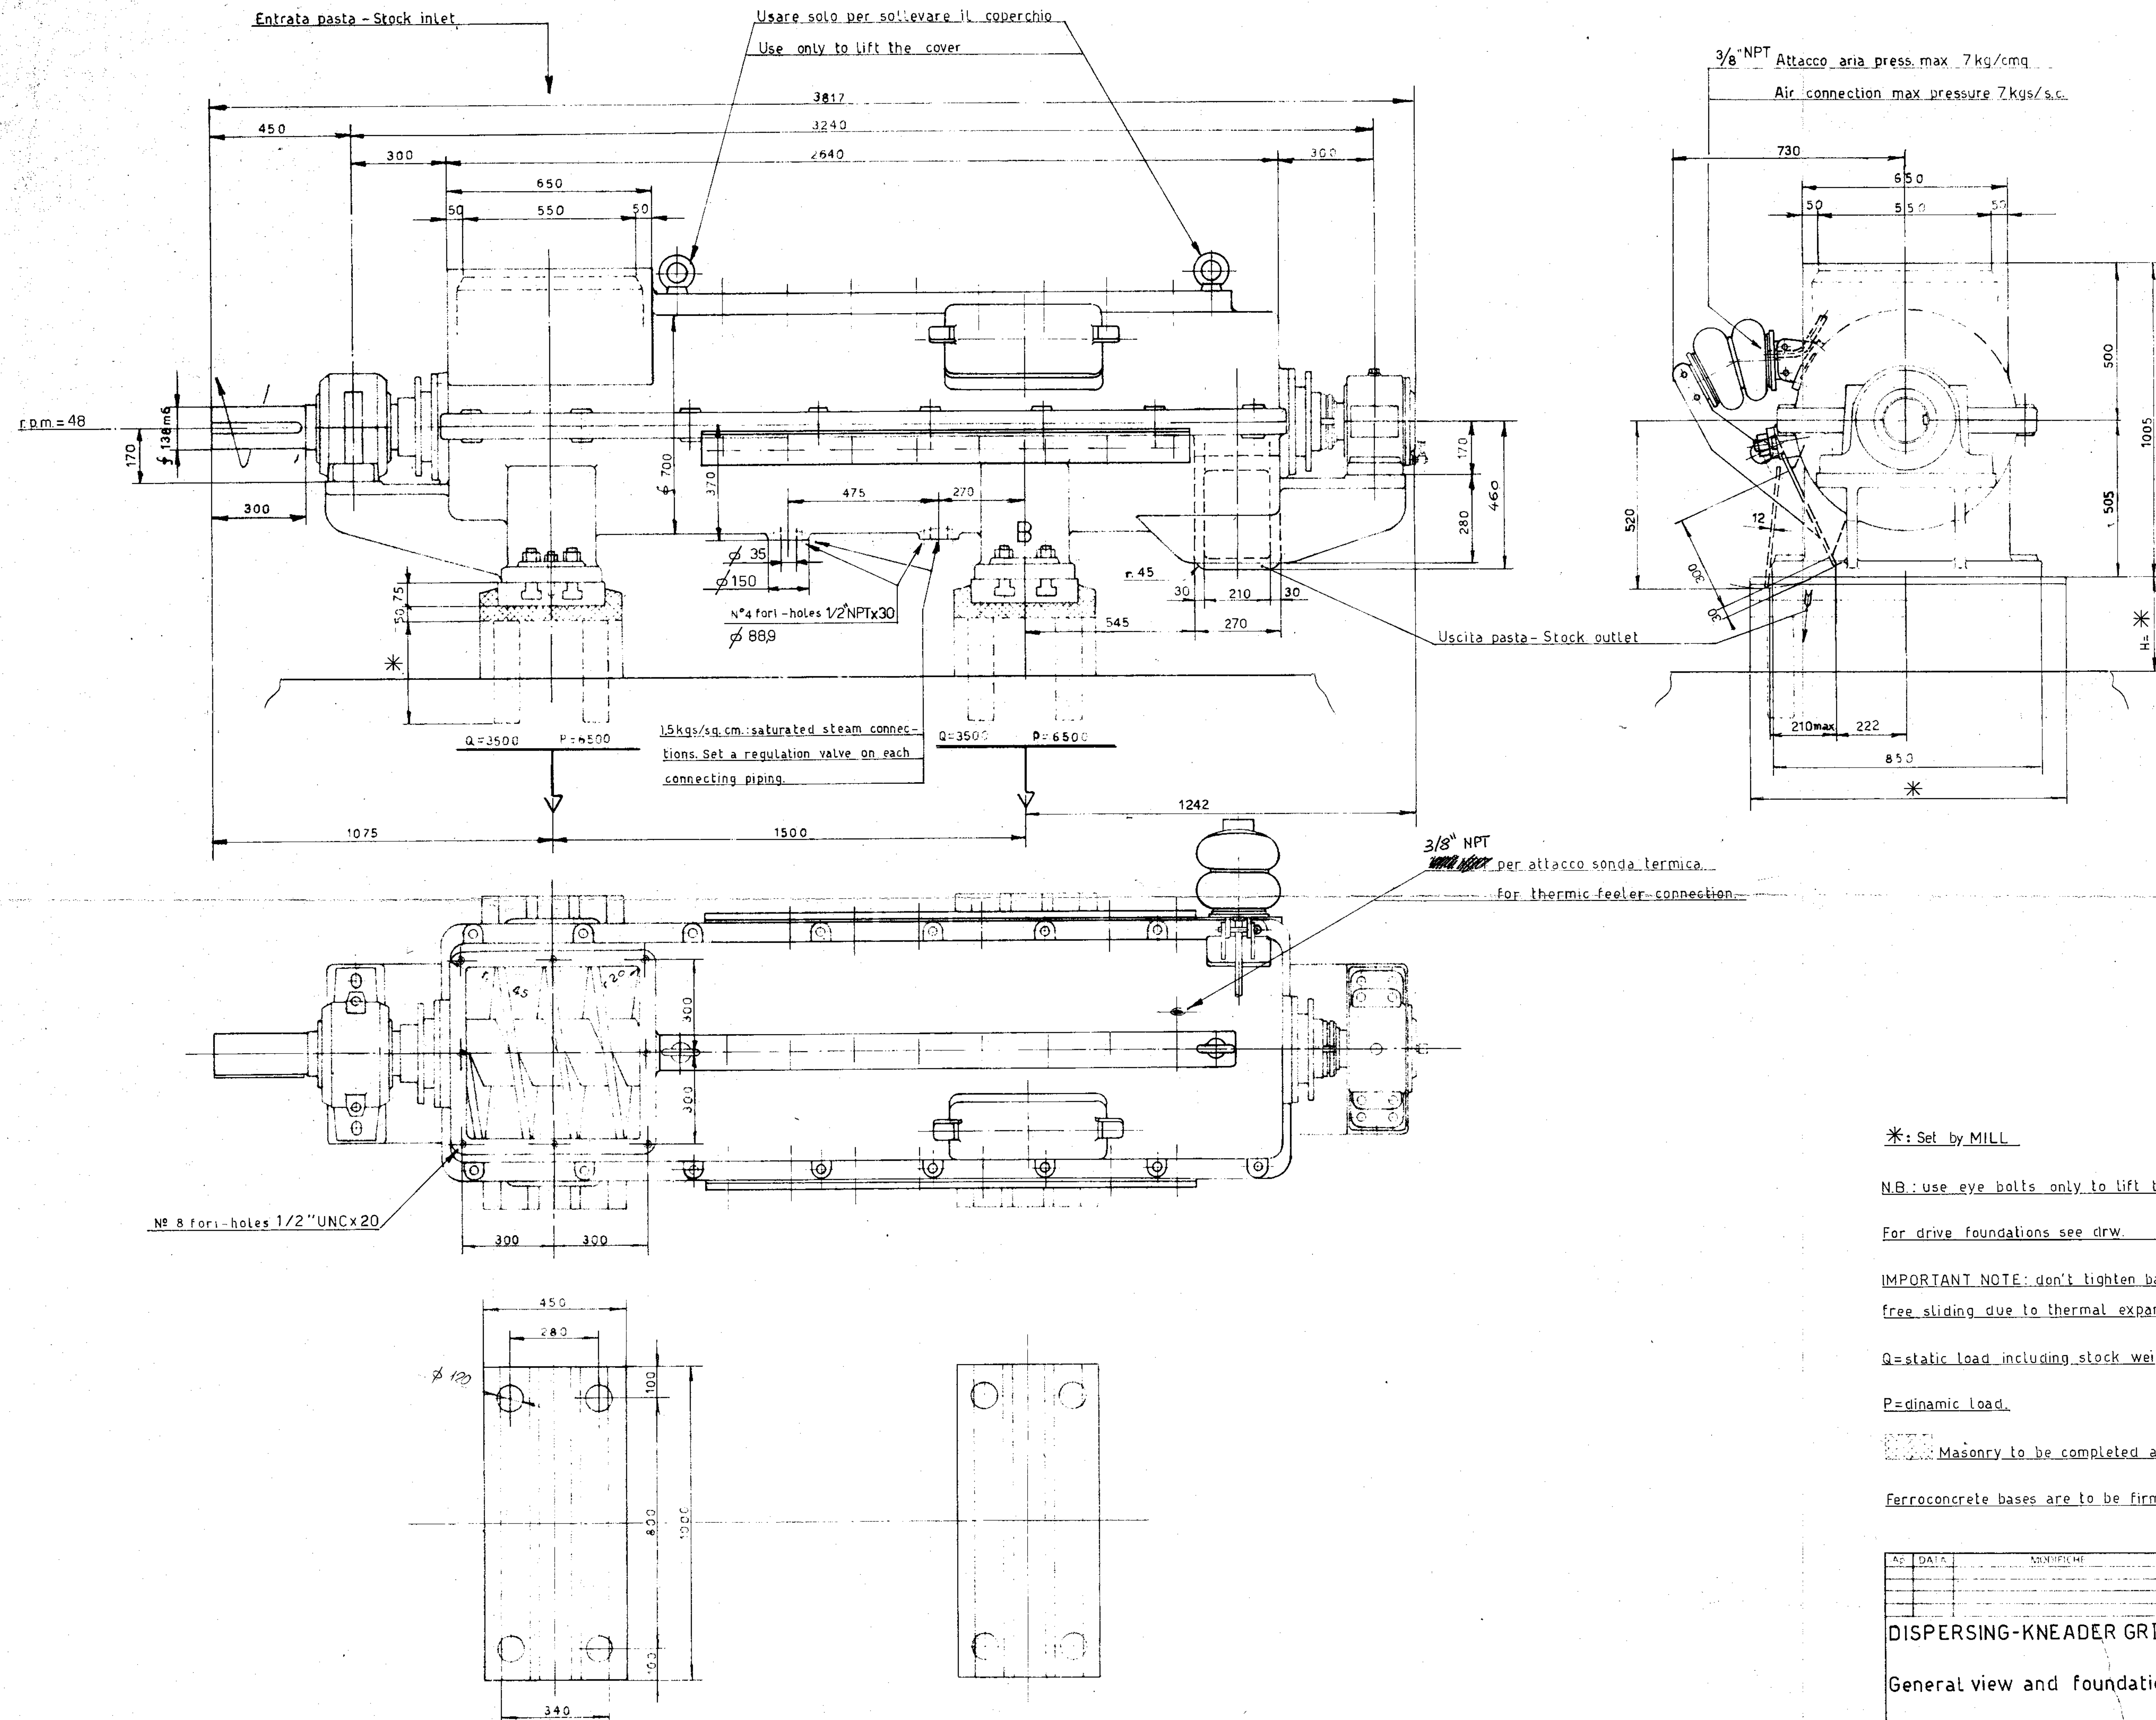

*: Set by MILL

N.B.: use eye bolts only to lift the cover.

For drive foundations see drw.

IMPORTANT NOTE: don't tighten base B bolts in order to allow free sliding due to thermal expansion.

Q = static load including stock weight.

P = dynamic load.

Masonry to be completed at assembly.

Ferroconcrete bases are to be firmly anchored to the floor.

AP	DATA	MODIFICHE	Forma	79-Fil.23728-2/415
DISPERSING-KNEADER GR11/4PCS				
General view and foundations.				
Ing. S. MAULE & C. S.p.A.				
RIVOLI (TORINO)				
PROPRIETÀ RISERVATA. A. cons. di legge è vietata la riproduzione di questo disegno senza autorizzazione scritta.				
DATA 30-7-90		DIS. CARNOVALE		
SCALA 1:10		VISFO		
DIS. 25936				