

TC-888

NMC-WOLLARD Mobile Belt Loader

Electric, gas, or diesel conveyor with unique tubular chassis – deflects impacts – low maintenance

- Modular engine/transmission makes maintenance and repair simple
- Maneuvers around aircraft — only 47.5" high (1.21 m)
- Component commonality streamlines parts and maintenance procedures

Standard Features

- Power steering
- Belt controls at front and rear of conveyor bed
- Right side hand rail
- Aircraft protection bumpers on conveyor
- Emergency stops on 4 corners
- Tubular, unitized impact-deflecting chassis

Designed for ramp work

Unique wrap-around tubular steel bumper deflects impacts — protects both the belt loader and other ramp equipment from dings, dents and collision damage. Look into the NMC-WOLLARD Belt Loader — designed for today's demands and economy.

**Electric AC/DC
retro-fit kits available**

GSA: GS-07F-0558Y





NMC-WOLLARD TC-888 Mobile Belt Loader

Specifications: subject to change without notice. Photos and illustrations may show optional equipment.

Note: Dimensions may vary slightly with individual engine packages

Height of Conveyor Bed from Ground <small>All measurements to top of roller. *</small>			
Condition	Front	Rear	Angle
front EXTENDED rear retracted	167" (4.24 m)	14.5" (0.37 m)	33 degrees
front EXTENDED rear EXTENDED	154.5" (3.92 m)	41.5" (1.05 m)	24 degrees
front retracted rear EXTENDED	28" (0.71 m)	59" (1.50 m)	-6 degrees
front retracted rear retracted	42" (1.07 m)	33.5" (0.85 m)	2 degrees

* Bed heights subject to change depending on engines and options selected

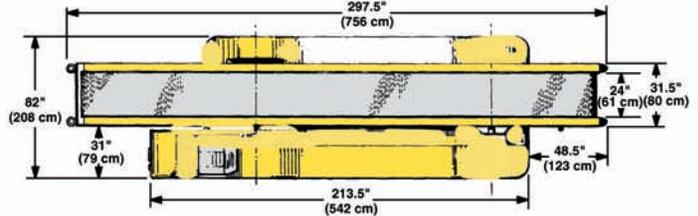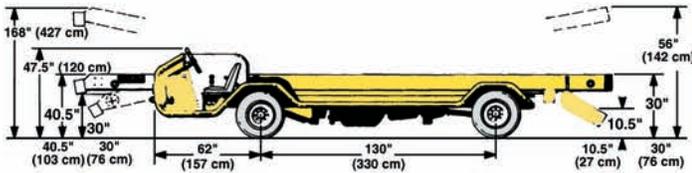

Aircraft Servicing Capability

All Aircraft having doorsill heights ranging from 42" (1.07 m) to 167" (4.24 m).

Chassis

Drive speed, gas/diesel....25 mph (40 kph) min
 Drive speed, electric, level.....16 mph (26 kph)
 Operating ambient temperature range:
 -25°F to +125°F (-32°C to +52°C)
 Gradability.....10%
 Turn Radius.....22 ft. (6.7 m)
 Ground Clearance.....5.5" (140 mm)

Conveyor Belt

Up/Down controls: manually actuated hydraulic valve levers in the driver compartment.
 Belt Controls: manual levers front and rear of conveyor bed.
 Length..... 297.5" (7.56 m)
 Width..... 31.5" (0.8 m)
 Belt Width.....24" (0.61 m)
 Rated Capacity, distributed:.....2,000 lbs. (909 kg)**
 Belt Speed..... 40-120 fpm (0.2-0.6 m/sec)
 Belt Movement.....Forward-Stop-Reverse
 Dual front rubber bumpers:
 4" (10 cm) O.D. x 3" (7.6 cm) I.D.
 Dual rear rubber bumper:
 4" (10 cm) O.D. x 3" (7.6 cm) I.D.
 Roller spacing.....3" (8 cm) for 2 ft. (0.61 m) from each end of belt and 6" (15 cm) on balance.

**Up to 15°. 1,000 lbs. (454 kg) from 15° to max angle

Power

Power options include:
 Gas
 LP

Dual fuel
 Diesel
 Electric (AC and DC)
 Consult factory for details.

Transmission

Ford C-6. Dual lever shift/throttle control with detented F-N-R and mechanical shift/throttle lockout.

Drive Axle

Heavy duty, 3,300 lb. (1,500 kg) capacity rigid mounted to frame.

Front Axle

Heavy duty, 6,000 lbs. (2,722 kg) capacity, 71.3" (1.81 m) track, rigid mounted to frame.

Tires.....P225/75 R15

Brakes

System.....4-wheel split cylinder
 Front.....disc type
 Rear.....drum type
 Parking.....Orscheln lever

Electrical System

Type.....12 VDC negative ground
 Alternator.....55 amperes typical
 Battery.....group 27

Fuel System

Fuel Tank: aluminum with vented cap and 22 gal. (83L) capacity. Diesels: fuel filter/water separator.

Fuel Gauge: mechanical on tank

Cooling System

Matched to engine requirements.

Steering System

Char-lynn power steering control with a single-stage hydraulic cylinder.

Hydraulic System

Lift Cylinders..... single-stage
 Valves..... manually actuated
 Pump..... engine driven

Pressure.....1,800 psi max. (124 bars)
 Filter, on return line..... 10 microns
 Strainer, on suction line..... 80 mesh
 Hydraulic Tank..... aluminum with sight gauge and breather cap

Instrument Panel

Warning indicators..... Volts, oil, coolant and brakes
 Switches..... Running lights, front spotlight, engine heat for cold start

Operating & Shipping Data

Length..... 297.5" (7.56 m)
 Width..... 82" (2.08 m)
 Height..... 47.5" (1.21 m)
 Weight:
 Gas/diesel.....5,900 lbs (2,676 kg) complete with engine
 Electric....7,680 lbs. (3,484 kg) w 300 A. Hr. 80 V. battery

Optional Items

Hourmeter
 Fuel gauge
 On board charger, 120 VAC/230 VDC
 Electric belt controls
 Retractable package guide (3-3/4"—9.5 cm—high)
 Full width front bumper
 Aux. pump for raising roller bed without engine power
 Rear work spotlight
 Engine indicator gauges
 Directional signals
 Fire extinguisher
 Mico lock brakes
 Personnel seats
 850 CCA battery

NMC-WOLLARD

2021 Truax Blvd, Eau Claire, WI 54703
 Phone: 800-656-6867
 Phone: 715-835-3151
 Fax: 715-835-6625
 Email: bsteingart@nmc-wollard.com
 Website: www.nmc-wollard.com

Dealer/Distributor