

English

Compact Loaders

Track Loaders

VT275

MACHINE BOOK



GEHL®

Capacities		Imperial
Operating Weight		10249 lb
Operating Capacity at 35% Tipping Load		2750 lb
Operating Capacity At 50% Tipping Load		3929 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	h27	168 in
Height to Hinge Pin - Fully Raised	h28	129 in
Dump reach - Full height	r6	35 in
Dump angle at full height	a5	42 °
Overall Height to top of ROPS	h17	82 in
Overall length with bucket	l16	150 in
Ground clearance	m4	9 in
Overall width less bucket	b1	71 in
Bucket Width	e1	74 in
Clearance Radius - Front with Bucket	b18	93 in
Engine		
Engine brand		Yanmar
Engine model		4TNV98CT-XNGL
Engine power (Hp)		71.50 Hp
Engine power (kW)		52.33 kW
Max. torque / Engine rotation		217 ft/lbs @ 1800 rpm
Battery voltage		12 V
Alternator - Ampere		100 A
Hydraulics		
Standard flow - Auxiliary hydraulics		26 US gpm
High-Flow Auxiliary Hydraulics - Option		33 US gpm
Tank capacities		
Hydraulic tank capacity		6 US gal
Fuel tank capacity		38 US gal
Cooling liquid		5 US gal
Number of cylinders		4

BUCKETS

Bucket 4 in 1 (Compact machines)



Bucket 4 in 1 (Compact machines) - B4x1 1850 / 480

All-Tach®	Heaped capacity	Overall weight	Overall height	Width	Depth
N51502043	127 US gal	926 lb	30 in	73 in	31 in
Mandatory machine equipment: 					

BUCKETS

Bucket 4 in 1 with Teeth (Compact machines)




Bucket 4 in 1 with Teeth (Compact machines) - B4x1 1850 / 480 T

All-Tach®	Heaped capacity	Overall weight	Overall height	Width	Depth
N51502047	127 US gal	926 lb	30 in	73 in	31 in
Mandatory machine equipment: 					

BUCKETS

High strength demolition bucket (Compact machines)

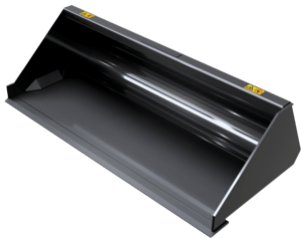

High strength demolition bucket (Compact machines) - BD 1850 / 740

All-Tach®	Heaped capacity	Overall weight	Overall height	Width	Depth
N51502031	195 US gal	694 lb	24 in	73 in	43 in
Mandatory machine equipment: 					

BUCKETS

Light Material Bucket (Compact machines)



Light Material Bucket (Compact machines) - BLM 1850 / 1100

All-Tach®	Capacity	Heaped capacity	Overall weight	Overall height	Width
N51502037	2425 lb	291 US gal	772 lb	33 in	73 in
Depth					
43 in					
Mandatory machine equipment: 					

BUCKETS

Standard Digging Bucket (Compact machines)




Standard Digging Bucket (Compact machines) - BS 1850 / 740

All-Tach®	Heaped capacity	Overall weight	Overall height	Width	Depth
N51502023	195 US gal	694 lb	24 in	73 in	43 in
Mandatory machine equipment: ✕					

BUCKETS

Standard Digging Bucket with Teeth (Compact machines)

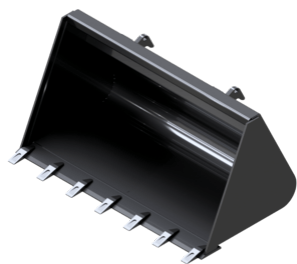


Standard Digging Bucket with Teeth (Compact machines) - BS 1850 / 740 T

All-Tach®	Heaped capacity	Overall weight	Overall height	Width	Depth
N51502027	195 US gal	694 lb	24 in	73 in	43 in
Mandatory machine equipment: ✕					


BUCKETS

Utility Bucket (Compact machines)

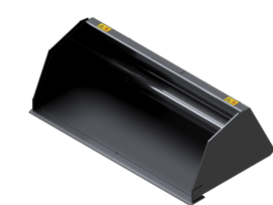

Utility Bucket (Compact machines) - BU 1850 / 900

All-Tach®	Capacity	Heaped capacity	Overall height	Width	Depth
N51502035	2976 lb	238 US gal	29 in	73 in	42 in
Mandatory machine equipment: ✕					

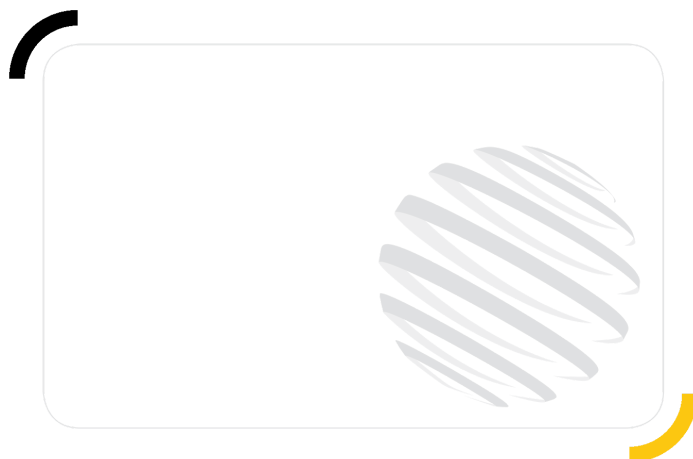

GEHL®

Head Office

P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095

Tel: (262) 334-9461 - Fax: (262) 338-7517

www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend