


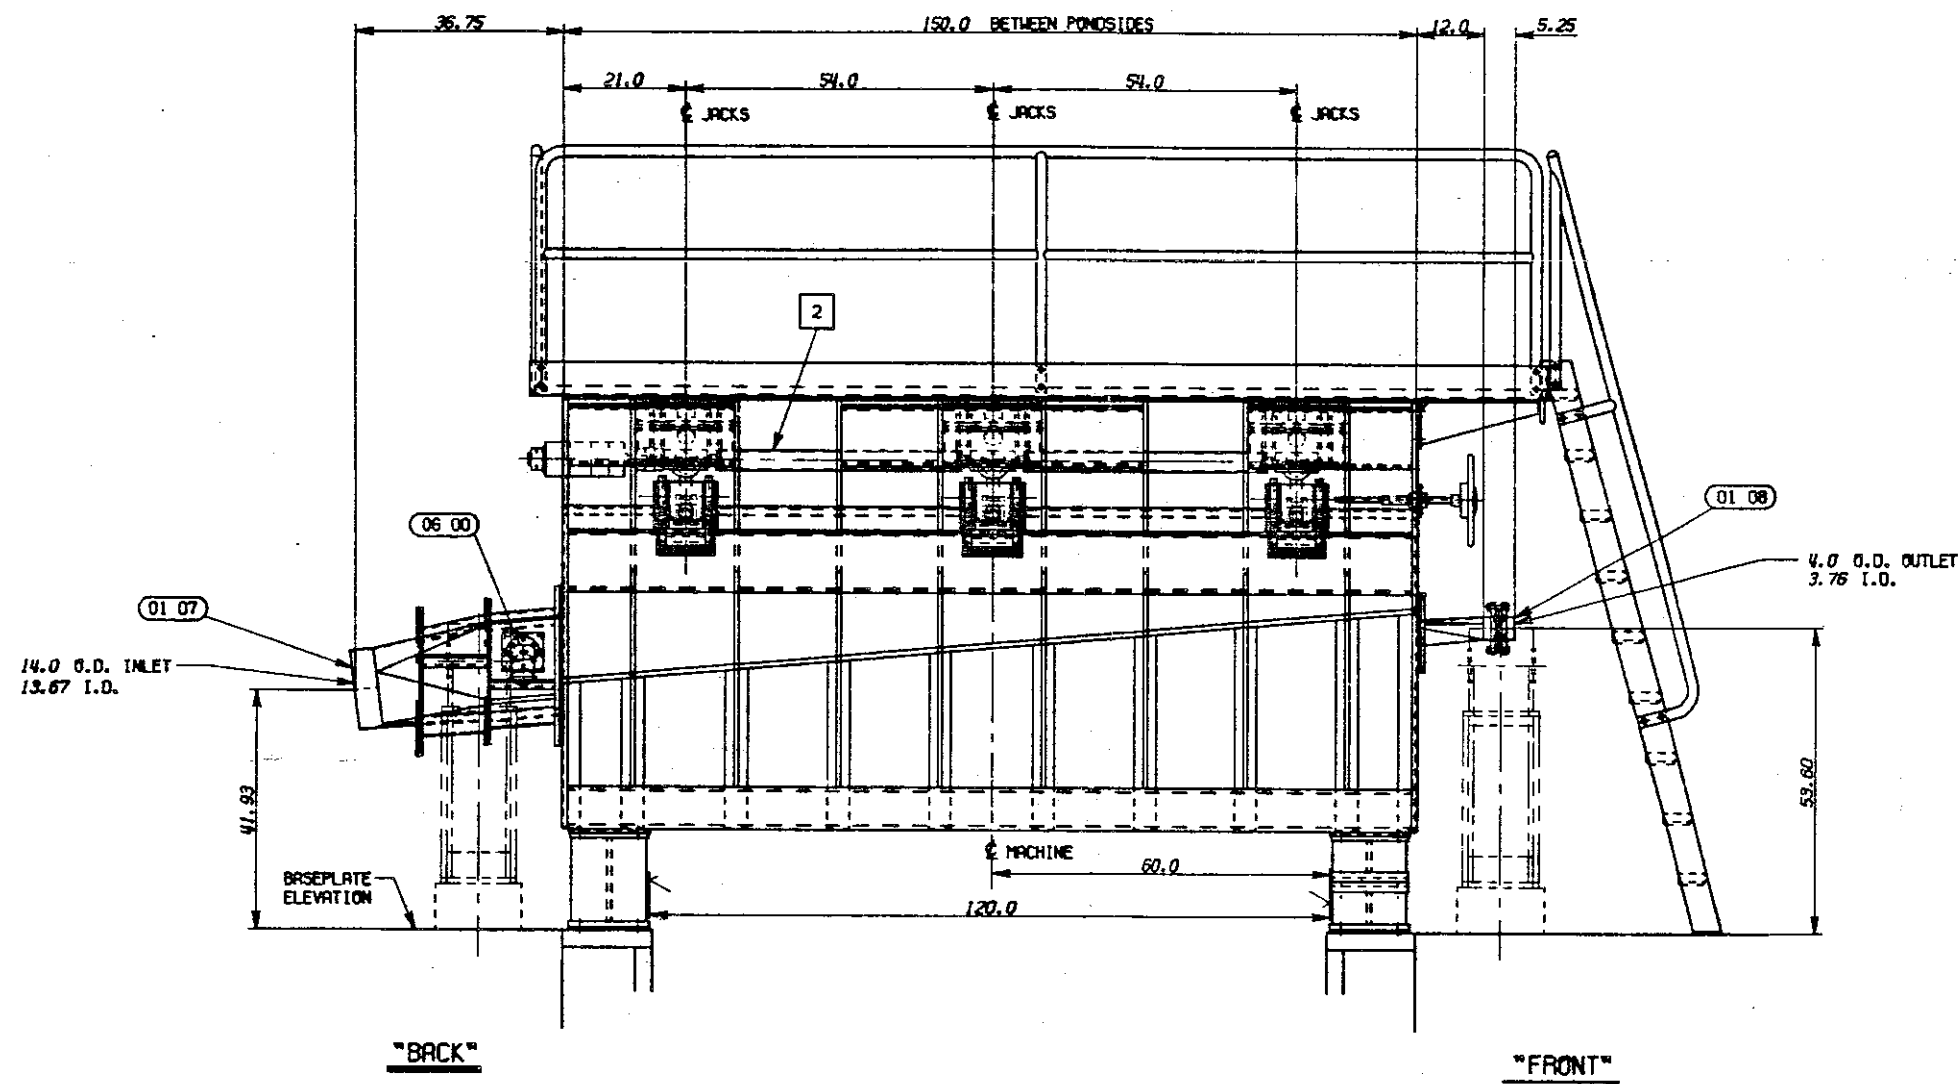

NOTES:

- 1 SLICE OPENING IS ADJUSTABLE FROM .25 TO 4". SLICE LIP SET-BACK IS ADJUSTABLE FROM .5 TO 1.25 BEHIND APRON LIP TIP. SET-UP = .568 BACK AND .58 OPEN.
- 2 SLICE CROSS SHAFT TURNS AT 200. RPM MAX. CROSS SHAFT GUARDS ARE BY MILL.
- 3 KEEP SHEET REMOVAL AREA CLEAR. DO NOT MOUNT ANY EQUIPMENT ON HEADBOX THAT WILL INTERFERE WITH CONVENTIONAL SHEET REMOVAL.
- 4 BELOIT FURNISHES .5 THICK SHIM PACKS. MILL TO ADD OR REMOVE SHIMS AS REQUIRED TO ACHIEVE SET-UP DIMENSIONS.

THIS PRINT IS THE PROPERTY OF BELOIT CORPORATION. THE INFORMATION THEREON IS SUBMITTED IN CONFIDENCE									
REVISION	PROCESS APPROVAL	ORDER NO.	CUSTOMER NAME		MACH. NO.		BELOIT CORPORATION CORPORATION		
	FILE NO.	65359	S.O. WARREN CO.		14				
	DEPT. NO.	611	WESTBROOK, MAINE						
	DRAWN	CHK'D	APP'D	APP'D	SCALE	SHEET	REFERENCE DRAWING		
	DATE	5-20-88	SHH	RFP	JRD	JRD	1:10	1 of 1	LC-1110-6-8-0
TITLE		CONCEPT III HEADBOX (GAGE)							
IDENTIFICATION NUMBER		MA-1110-6-8-1							