Automatic wrapping machine for chocolate tablets and bars



Type:

Output: up to

140/min

Application

For moulded tablets or bars, with or without nuts. with or without filling, from 30 to about 100 g (1 oz. to 4 oz.)

For coated or plain wafers.

Wrapping materials

Inner wrap Aluminium foil, uncoated, coated or heatsealable, from reel

(max. Ø 300 mm/11 3/4 in.)

Outer wrap: Paper from reel (max. Ø 380 mm/15 in.) as band or full wrap, photoelectrically registered. From stack: band label, full wrap or carton.

Optional: Intermediate wrap of glassine, from reel (max. ø 300 mm/11 3/4 in.)


Operating principle

Wrapping of bar in aluminium foil, economy fold or hermetically heatsealed.


2nd stage:

wrap.

chromo insert.



Inner wrap of aluminium foil.

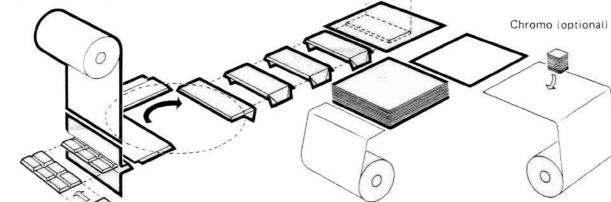

Outer wrap from stack, or from reel, photo-electrically registered.

Optional: Intermediate wrap of glassine, from reel, also usable as full outer wrap, photo-electrically registered.

Size range

(approximate only)

Length Width Height

Variant 1:

140 65 17 max. mm 5 1/2 2 5 8 5 8 in. 90 30 6 mm 3 1/2 1 1/4 1/4 111.

Variant 2:


115 65 17 max. mm 4 1/2 2 5/8 5/8 65 30 6 min. mm 25/8 11/4 1/4 in

Wrapping programme

Economy fold

Infeed belt, fed automatically

or manually.



2nd stage:

Full wrap

Band label

Intermediate wrap (optional)

Carton

Special features

Sturdy, reliable construction.

Minimum maintenance, easy to operate.

Central control unit.

Automatic oil spray lubrication.

Protection guards fitted with safety switches.

Emergency stop switch.

Disengageable handwheel with electric safety cut-out.

No product - no material feed.

Infinitely variable speed.

Power consumption.

kVA max. 4

Machine weight:


or multipacks.


approx. 2,5 tons

Optional equipment

Chramo inserter

Bling code emposser

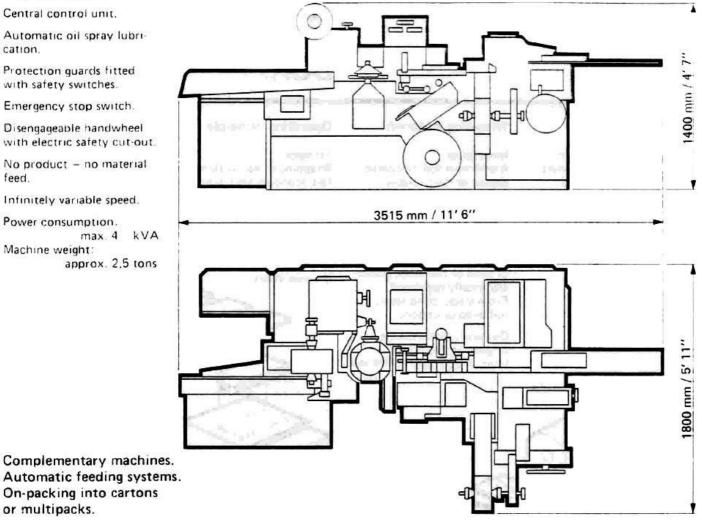

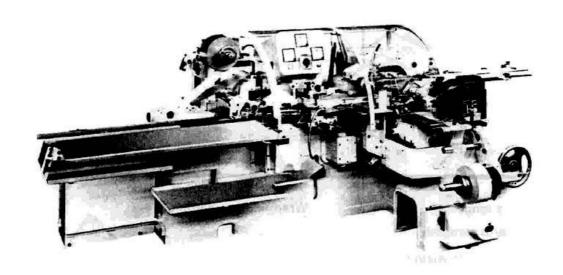

SIG Swiss Industrial Company CH-8212 Neuhausen Rhine Falls / Switzerland

Phone 053 8 15 55

Telex 7 61 57



ew telephone numbers 053 / 8 61 11