

## BAGGING MACHINE:

### PANDA SUPER

#### TECHNICAL SPECIFICATION

##### Product dimensions


Length: a) 50-200 mm  
b) 100-500 mm

Width: 10-250 mm

Height: a) 1-90 mm

b) 1-120 mm

Other dimensions on request.  
Maximum and minimum  
dimensions in combination  
can only be accepted on  
specially prepared machines.

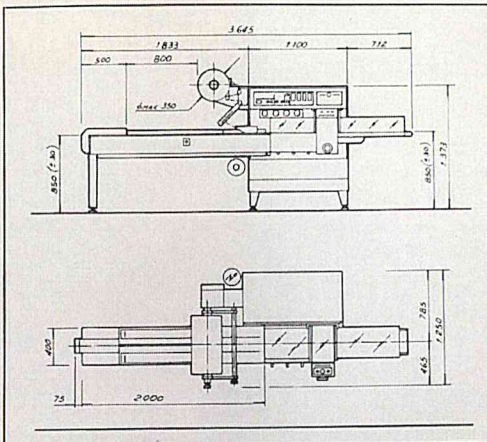

##### Wrapping material

All heat-seal films such as cellulose films, polypropylene, various laminates, aluminium foil, MPY micro-perforated, PVC, cold-seal films, etc.

##### Reel width

Standard 500 mm

650 mm on request

Outer diameter: 350 mm max.

Core diameter: 76 mm

Maximum weight 40kg

##### Cut-off length

Variable, ratio 1:5

##### Mechanical speed range

Variable by means of handwheel:

a) 25-125 cycles/min

b) 40-220 cycles/min

Other speed ranges on request.

Electrical supply: 220/380 V, 3 phases, N+E, 50/60 Hz  
Other electrical supplies on request.

Consumption: 4 kW-15 A

Heater elements: 110/220 V

Controls: 24 V

Motor: 0.75 kW

Colour: off-white, RAL 9001

Safety guarding: according to safety regulations in force

Machine weight: 800 kg ca.

The above given data is not binding. We reserve the right to change the machine specifications without prior notice.



215-579-2900

ILAPAK, INC.  
27 W. Lincoln Highway  
Penndel, PA 19047  
PH: (215) 757-3337  
FAX: (215) 757-4558  
TWX: 510-667-2045