



Athas

Athos



ATHOS MACCHINA SEMI AUTOMATICA PER L'APPLICAZIONE DI QUALSIASI TIPO DI NASTRO BI-ADESIVO, ACRILICO, FOAM, PVC E TRANSFER SU OGNI TIPO DI SUPPORTO CARTA, CARTONCINO, ONDULATO DI TUTTI I TIPI, PVC, PLASTICA, ACRILICO E LEGNO.

La Athos è una macchina studiata per l'applicazione in modo automatico del nastro bi-adesivo con alimentazione manuale. Composta da due applicatori "RAP", e da un gruppo rotelle su rullo di lancio in uscita su tavolo raccogliatore.



SEMI-AUTOMATIC MACHINE FOR THE APPLICATION OF ANY TYPE OF DOUBLE SIDED TAPE, ACRYLIC, FOAM, PVS AND FRANSFE ON ANY KIND OF PAPER SUPPORT, CARDBORD, ALL TYPES OF CORRUGATED, PVC, PLASTIC, ACRYLIC AND WOOD.

The Athos machine has been designed to apply double sided tape in automatic way, with manual feeding. Athos is composed of two applicators "RAP", and group of wheels on the output roller and delivery table.






 Applicatore nastro bi-adesivo "RAP"
 *Applicator of double-side tape "RAP"*

 La macchina è predisposta per la lavorazione con n. 4 RAP

 The machine is designed to work with N.4 RAP

 Prodotti realizzabili con la macchina Athos
 Products achievable with the Athos machine

Poster
Poster

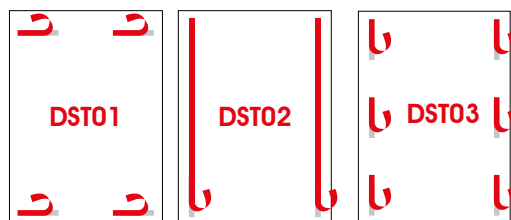


Campionari
tessuti
Tissue samples




Buste
Envelopes




Sacchetti
Bags




Bustine CD
CD Envelopes




Portafoto
Picture frames

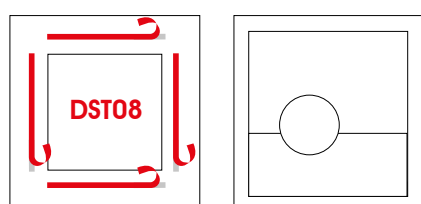

Scatole di cartone
Cardboard boxes

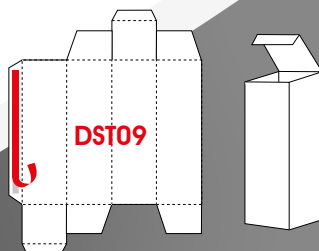


Scatole di propilene
Propylene boxes

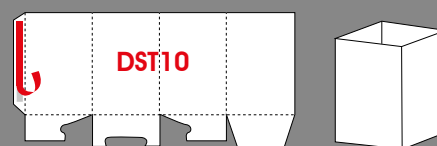

Cartoline
Postcards




Pendolini
Pendulums

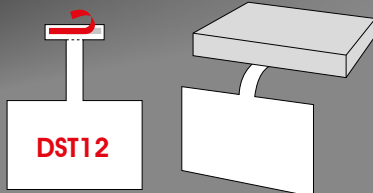


Calendari
Calendars




Cartone ondulato
Corrugated cardboard



Cartelline
Folders

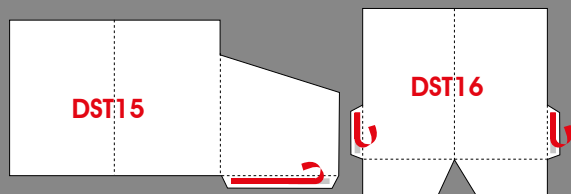

Shopper
Shopper

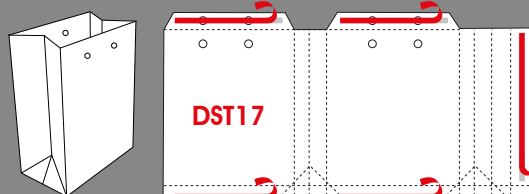

Caratteristiche tecniche Athos



Formato di introduzione	Max: 800 x 1050 mm Min: 100 x 100 mm
Grammatura min.	80 g/m ²
Grammatura max.	800 g/m ² , tutti i tipi di cartoncino ondulato: A,B,C,E,F,N,EB,EF e PVC
Materiale rigido	plastica, acrilico e legno - da 1mm a 10 mm
Velocità meccanica	70 Mt/m
N. di applicazioni	Da 1 a 5
Allacciamento elettrico	220 V
Potenza di allacciamento	2 Kw
Dimensioni di ingombro	2710 x 1265 mm h 1590 mm
Lunghezza max. nastro applicabile	999 mm
Lunghezza min. di nastro applicabile	35 mm
Distanza min. tra una applicazione e l'altra in linea	25 mm
Distanza min. del nastro dal margine foglio	5 mm
Distanza min. tra una applicazione e l'altra in parallelo	0 mm

Specifiche tecniche Applicatore Rap



Larghezza nastro min-max	Da 9mm-25mm Standard, a richiesta 50mm
Diam. esterno rotolo	480 mm
Diam. interno rotolo	76 mm
Alimentazione	Elettro Pneumatica
Velocità max. di produzione	70 mt/min

Technical characteristics of the Athos machine




Format machine introduction	Max: 800 x 1050 mm Min: 100 x 100 mm
Min paper weight	80 g/m ²
Max paper weight	800 g/m ² , all corrugated flute type: A,B,C,E,F,N,EB,EF and PVC
Rigid materials	plastic, acrylic and wood - from 1 mm up to 10 mm
Mechanical Speed	70 Mt/m
N. of application	From 1 to 5
Electrical connection	220 V
Power connection	2 Kw
Machine dimensions	2710 x 1265 mm h 1590 mm
Max. applicable tape length	999 mm
Min. applicable tape length	35 mm
Min. distance between an application and the next in line	25 mm
Min. distance of the tape from the edge of the paper	5 mm
Min. distance between one application and the next one in parallel	0 mm


Technical characteristics Rap



Tape width (Min-Max)	From 9mm-25mm and on request up to 50mm
Max outer diameter roll tape	480 mm
Internal diameter roll tape	76 mm
Power supply	Electro Pneumatic
Max Production speed	70 mt/min

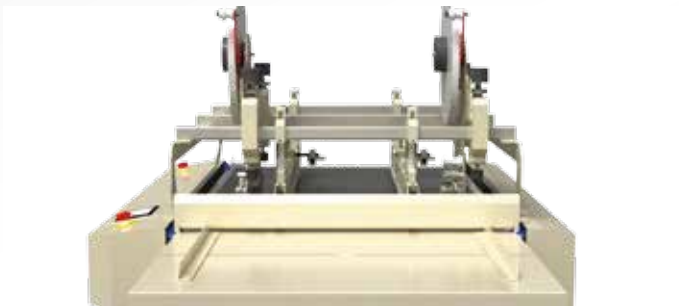

 Mettifoglio manuale
 Manual Feeder

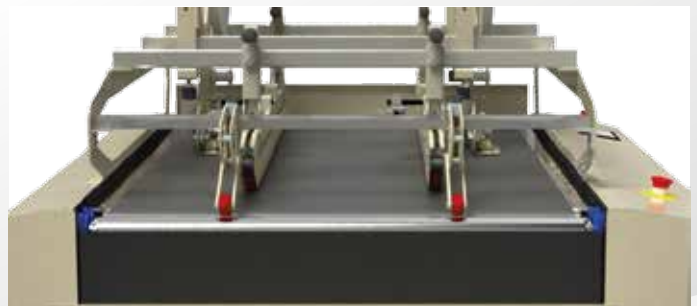

 Dettaglio gruppo rotelle di pressione su rullo
 Detail pressure rollers roll group



Call 01582 562518
sales@encoremachinery.co.uk
www.encoremachinery.co.uk

encore
Print & Finishing Equipment