




Tetra Pak® Cap Applicator 30 Flex 0400

Family & portion packages

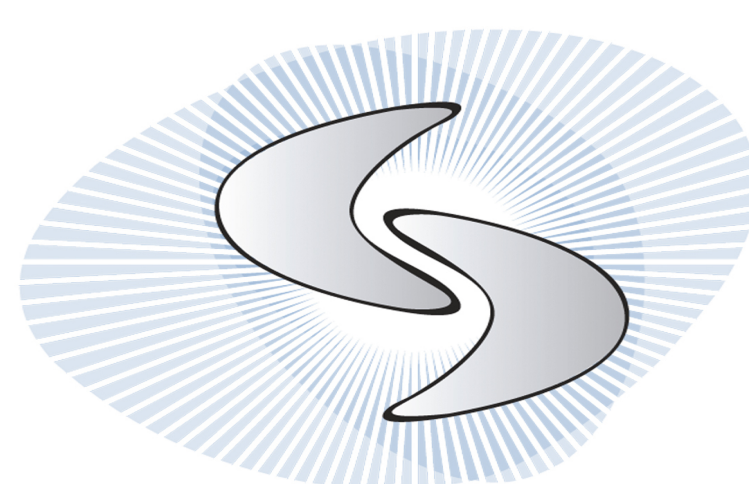

iLine

Tetra Pak® Cap Applicator 30 Flex

ELECTRICITY

Phase	3 N
Frequency	50/60 Hz
Voltage	400 V
Power consumption pre-heating	10% ± 3,3 kW
Power consumption production	10% ± 6.7 kW
Fuse dimension	20 A

CAPACITY

Family packages	max 9,600 p/h
Portion packages	max 10,800 p/h

COMPRESSED AIR

Consumption	max 680 ± 17 NI/min
Supply pressure	600 to 700 KPa (6 to 7) [87 to 102] KPa (bar) [psi]

TEMPERATURE

Working Environment temperature	15 ° - 40 °C (59 ° - 104 °F)
Relative humidity	50 % at 40 °C* (104 °F)

NOISE

	76,5 dB(A)
--	------------

DIMENSIONS AND WEIGHT

Length	5,500 mm
Width	2,260 mm
Height	2,260 mm
Weight	2,809 kg

NOTE Machine dimensions and weight refer to standard equipment without optional modules or geographical variants.
NOTE For shipping crate dimensions please see latest Installation Manual.

PRE SALES OPTION / OPTIONAL KIT

3420950-0100 Adhesive Detector	OK
3408460-0100 Lifting Device	OK

CERTIFICATIONS

