


OPERATION MANUAL

C.N.C. LATHE

TNL-35

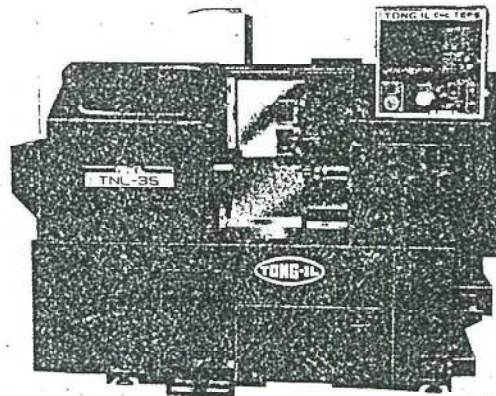

TONGIL CO., LTD.

CONTENT

| | |
|---|----|
| 1. Specifications of machine | 6 |
| 1-1 General specification | 6 |
| 2. Operation | 8 |
| 2-1 For the beginners of the N.C. lathe operation | 8 |
| 2-2 Checking before the operation of N.C. lathe and notes | 8 |
| 2-3 Operation of machine | 9 |
| (1) Operation of hydraulic system | 9 |
| 1) Pressure indication | 9 |
| 2) Adjustment of pressure | 10 |
| 3) Supply of oil | 11 |
| (2) Selection of spindle speed | 12 |
| (3) Structure of hydraulic chuck | 15 |
| 1) Method of fixing chuck | 16 |
| 2) Adjustment of chuck | 16 |
| 3) Allowable revolution speed | 17 |
| 4) Maximum setting of spindle speed | 17 |
| 5) Cautionary notes for hydraulic chuck operation | 18 |
| 6) Switching of chucking direction | 20 |
| (4) Method of cutting soft jaw | 21 |
| (5) Operation of tailstock | 23 |
| (6) Management after the work Practices | 27 |
| 3. Maintenance and inspection | 28 |
| 3-1 Supply of lubricant | 29 |
| Lubrication chart (Saddle specification) | 32 |
| Equivalent lubricants | 32 |
| (1) Headstock | 33 |
| (2) Slide way of bed, saddle and cross | 33 |

| | | |
|-----|---|----|
| 3-2 | Adjustment of central lubricant tank | 34 |
| 3-3 | Cleaning the sediment in the cutting fluid system | 34 |
| 3-4 | Adjustment of belt tension | 35 |
| 1) | Belt for spindle driving | 35 |
| 2) | Belt for pulse generator | 37 |
| 3) | Belt for Z-axis servo-motor | 37 |
| 4) | Belt for X-axis servo-motor | 38 |
| 3-5 | Other maintenance and checking | 39 |
| 1) | In case the angle of turret rotation changes | 39 |
| 2) | Horizontal check for bed level | 40 |
| 3) | Adjusting headstock center | 40 |
| 4) | Adjusting gib of cross carriage | 41 |
| 3-6 | Measures to be taken for troubles | 42 |
| 1) | Headstock | 42 |
| 2) | Turret (In case the turret collides) | 43 |
| 3) | Method of changing shear pin | 51 |
| 4) | Other checks | 53 |
| 4. | Transportation and installation | 55 |
| 4-1 | Safe transportation | 55 |
| 4-2 | Soil makes difference of foundation | 56 |
| 4-3 | Installation method | 57 |
| 4-4 | Method of horizontal adjustment | 58 |
| 4-5 | Foundation drawing | 60 |
| 4-6 | Checks for hydraulic lines | 61 |
| 5. | *Maintenance parts list | 62 |
| 5-1 | Hydraulic unit | 62 |
| 5-2 | Electrical parts | 63 |
| 5-3 | Expendable items | 64 |

| | |
|--|----|
| 6. Appendix | 65 |
| 6-1 Tooling system | 65 |
| 6-2 V8 turret dimension | 66 |
| 6-3 Dimensions of a tool holder | 67 |
| 6-4 Tool interfering diagram | 68 |
| 6-5 Operation range diagram (1st) | 69 |
| 6-6 Operation range diagram (1SC) | 70 |
| 6-7 Spindle nose (ASA-A2-6) | 71 |
| 6-8 Closed center hydraulic chuck mounting diagram | 72 |
| 6-9 Open center hydraulic chuck mounting diagram | 73 |
| 6-10 Hydraulic circuit diagram | 74 |
| 6-11 Hydraulic tailstock (1SC) | 75 |
| 6-12 Chip conveyor | 76 |

Diagrams