

- NOTES:**
1. UNIT MUST BE BOLTED TO FLOOR BEFORE OPERATING.
 2. ALL MATERIAL S.S. UNLESS OTHERWISE NOTED.
 3. AGITATOR ASSEMBLY: B-6136
 4. MAX OVERALL TILT HT = 138" APPROX

5 HP, 230/460V, 60 C, 3 PH, TEFC GEARMOTOR W/ WASHDOWN FEATURE, EXTERNAL PAINTED WHITE USDA APPROVED PAINT (100 RPM)(R57DT100L4)

(2) MOTOR RISERS (A-20396)

CHANNEL PAD (A-9839-2)

(2) REAR HINGE SUPT (A-18307)

1" 4-WAY VALVE CONTROL VALVE (BRONZE)

REAR CHANNEL SUPPORT (B-7033-13)

(2) TURNS LARGE COILS START UP SIDEWALL



8" I.D. X 16" STROKE WATER ACTUATED HYD CYL (ALUM/STL) (40 PSI REQUIRED)

FLUSH MOUNT RTD SENSOR W/ 5" COLLAR

(2) HYD CYL MT BLOCKS, C/S (A-6185)

HYD CYL MTG BRACKET (A-6445-3)

(3) 3"-150# FLAT FACE FLOOR FLANGES (SEE NOTE 1)

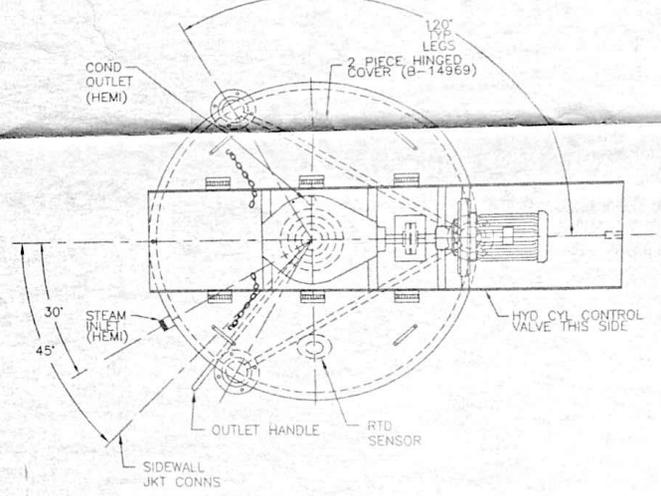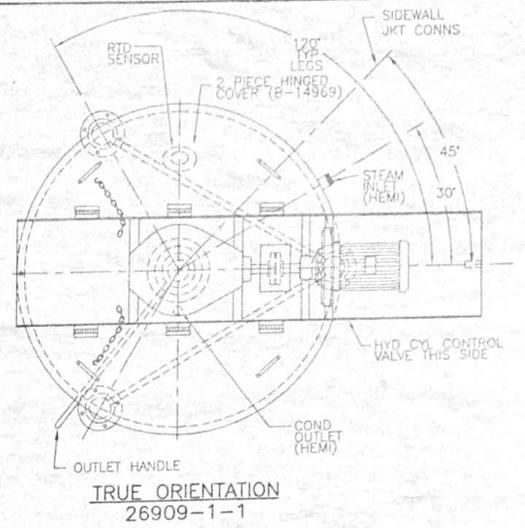

LEE SERIAL NO.: 26909-1 (1-3)

lee PROCESS SYSTEMS & EQUIPMENT
DIVISION OF LEE INDUSTRIES, INC.
PHILIPSBURG, PA.

(3) 400 GALLON STYLE "D9MT" KETTLE

REV.	DESCRIPTION	DATE	SCALE: NONE	DATE: 10-2-02	REV.
			DRAWN BY: BORDACK	DRAWING NO. C-8052	
			APPROVED BY: JEB	PLP 1/11	