


Type BSM/6181-6183/A0 – Rotary coolant inducers, automatic tool change, for type 7 drill shanks

ISO 9766



- Filtration to 40 µm maximum required.

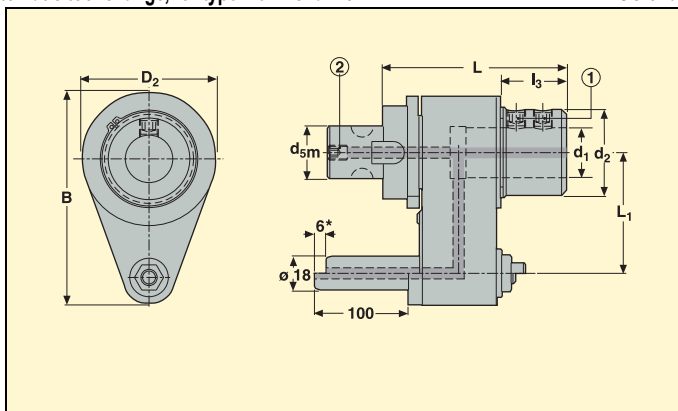

Graflex shank		For drill shank type	d ₁ mm	d ₁ inch	Part No.	Dimensions in mm						Max pressure bar	Max rpm	Balancing	
Size	d _{5m} mm					L	B	D ₂	d ₂	L ₁	l ₃				
					mm-version										
5	28	7	25	–	BSM051 6181 253A0	105	112,5	60	39,5	65	42	20	6000	–	2,2
5	28	7	25	–	BSM051 6181 255A0	105	127,5	60	39,5	80	42	20	6000	–	2,4
6	36	7	32	–	BSM061 6181 324A0	110	127,5	90	55	65	42	20	4000	–	2,3
6	36	7	32	–	BSM061 6181 326A0	110	142,5	90	55	80	42	20	4000	–	2,5
6	36	7	40	–	BSM061 6181 404A0	115	127,5	90	63	65	47	20	4000	–	2,3
6	36	7	40	–	BSM061 6181 406A0	115	142,5	90	63	80	47	20	4000	–	2,5
					inch-version										
5	28	7	–	1.00	BSM051 6183 253A0	105,4	112,5	60	39,5	65	42,4	20	6000	–	2,2
5	28	7	–	1.00	BSM051 6183 255A0	105,4	127,5	60	39,5	80	42,4	20	6000	–	2,4
6	36	7	–	1.25	BSM061 6183 314A0	110,5	127,5	90	55	65	42,5	20	4000	–	2,3
6	36	7	–	1.25	BSM061 6183 316A0	110,5	142,5	90	55	80	42,5	20	4000	–	2,5
6	36	7	–	1.50	BSM061 6183 384A0	115,5	127,5	90	63	65	47,5	20	4000	–	2,3
6	36	7	–	1.50	BSM061 6183 386A0	115,5	142,5	90	63	80	47,5	20	4000	–	2,5

Accessories

For d ₁ mm/inch	Socket	Reducing sleeve		Locking key	
			D	d	S
mm-version					
25	E99000	–	–	–	H06-4 6
32	E99000	05B61003225	32	25	H06-4 6
40	E99000	05B61004025	40	25	H06-4 6
40	E99000	05B61004032	40	32	H06-4 6
inch-version					
1,00	E99000	–	–	–	H06-4 6
1,25	E99000	05B61013125	1,25	1,00	H06-4 6
1,50	E99000	05B61013825	1,50	1,00	H06-4 6
1,50	E99000	05B61013831	1,50	1,25	H06-4 6

Spare parts

Locking screw (1)	Connecting pipe	Plug (2)
	S	
19X60841208	6	EU9023001 950A0810
19X608412	6	EU9023001 950A1012
19X608412	6	EU9023001 950A1012
19X608412	6	EU9023001 950A1012
19X60841208	6	EU9023001 950A0810
19X608412	6	EU9023001 950A1012
19X608412	6	EU9023001 950A1012
19X608412	6	EU9023001 950A1012

Please check availability in current price and stock-list.