



Cataract •
Glaucoma •
Retina •
Refractive •

When your patients entrust you with their eyesight, their vision and your expertise converge. For the world's most advanced surgical and diagnostic solutions in ophthalmology, you can turn to Carl Zeiss Meditec. We're committed to earning your trust anew, every day.

IOLMaster Optical Coherence Biometry

Enhancing Surgical Outcomes.
Advancing Practice Efficiency.



Publication No.: 000000-1362-211
Specifications subject to change. Printed in Germany 08/05.
Printed on environment-friendly paper, bleached without the use of chlorine.

Carl Zeiss Meditec AG
Goeschwitzer Str. 51-52
07745 Jena
Germany

Tel.: +49 (0) 36 41 2 20-3 33
Fax: +49 (0) 36 41 2 20-2 82
info@meditec.zeiss.com
www.meditec.zeiss.com

Carl Zeiss Meditec Inc. Phone: +1 925 557 4100
5160 Hacienda Drive
Dublin, CA 94568
USA
Toll free: +1 800 342 982
Fax: +1 925 557 4101
info@meditec.zeiss.com
www.meditec.zeiss.com




Unparalleled Confidence

The newest, most innovative IOLs raise patient and surgeon expectations, and require a higher standard for pre-operative biometry and practice efficiency. The IOLMaster has emerged as the new standard for meeting these expectations. With multiple measurement modes, highly accurate non-contact Optical Coherence Biometry technology and unparalleled connectivity, the IOLMaster provides faster, more accurate measurements while enhancing practice efficiency and resource utilization.

Combining performance with simplicity, the IOLMaster quickly and accurately measures biometric parameters required for IOL implantation in a single location without ever touching the cornea. At the push of a button, axial length, corneal curvature, White-to-White and anterior chamber depth are quickly and precisely measured.

IOL power calculation options are instantly available from the surgeon's personalized lens database. IOL lens constants are easily personalized for optimum outcomes.

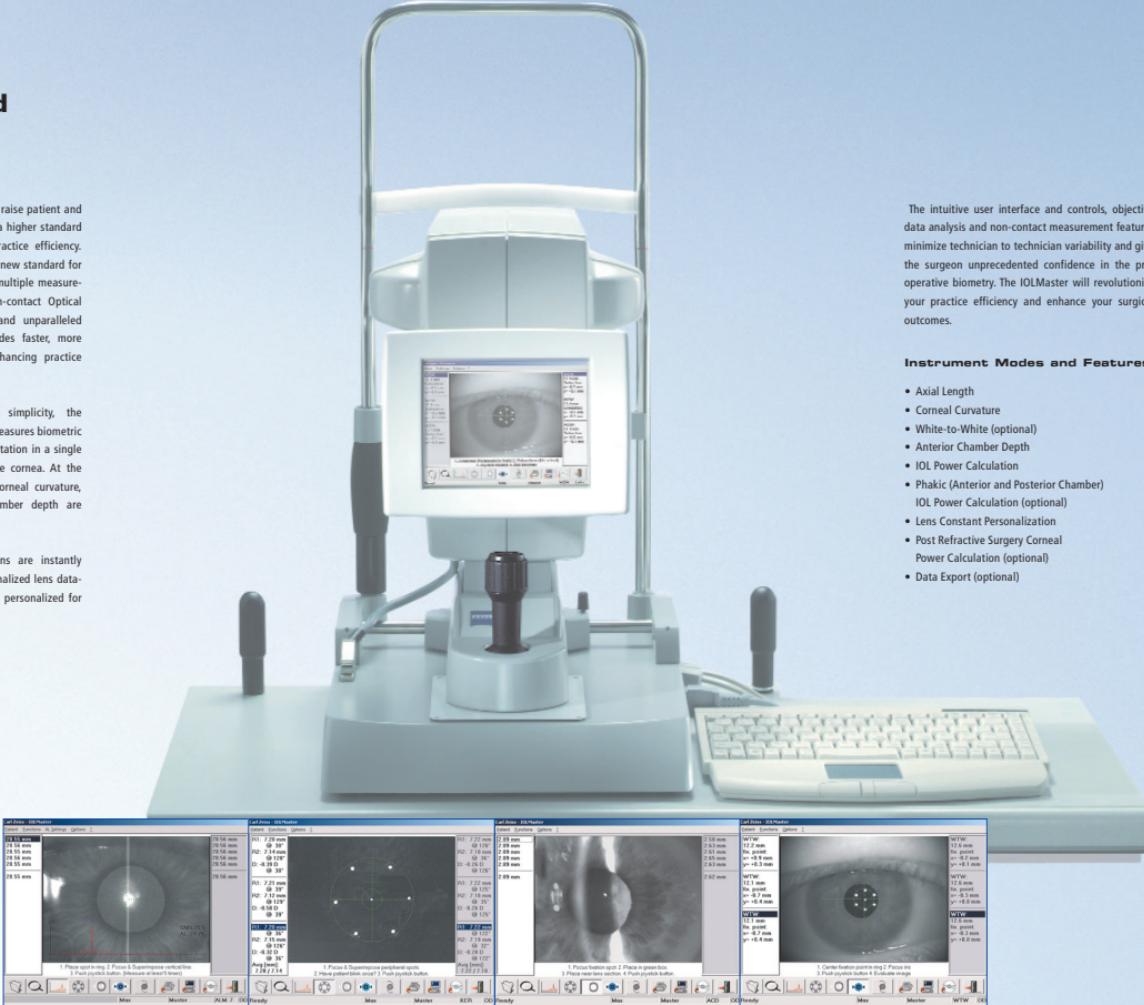

The intuitive user interface and controls, objective data analysis and non-contact measurement features minimize technician to technician variability and give the surgeon unprecedented confidence in the pre-operative biometry. The IOLMaster will revolutionize your practice efficiency and enhance your surgical outcomes.

Instrument Modes and Features

- Axial Length
- Corneal Curvature
- White-to-White (optional)
- Anterior Chamber Depth
- IOL Power Calculation
- Phakic (Anterior and Posterior Chamber) IOL Power Calculation (optional)
- Lens Constant Personalization
- Post Refractive Surgery Corneal Power Calculation (optional)
- Data Export (optional)

Advanced Precision and Efficiency

Accuracy and precision

- Precise axial length values along the visual axis, independent of accommodation or pupil size
- Measures a range of eyes including high myopes, aphakes, pseudophakes, staphylomas and silicone-filled eyes
- Integrated lens constant personalization feature provides true surgeon-specific customization of lens constants to further enhance outcomes

Superior ease of use

- Easy to learn - with proper training, users can immediately produce highly accurate and confident results
- Easy to delegate to multiple staff members
- Intuitive user interface for smooth and rapid measurements and IOL power calculation
- Easy system setup
- Automatic measurement with the push of a button
- Automatic right/left eye recognition for added safety
- Simple printing and data transfer functions



Increased patient workflow and practice efficiency

- Easy to delegate to multiple staff members
- Multiple measurement modes on one instrument - no need to move patients from instrument to instrument
- Rapid IOL power calculation can be performed immediately after the measurements or at a later time. The on-board patient measurement database maintains patient records for a user-defined period of time for subsequent recalculations
- Lens constants available from the internet can easily be downloaded into the system
- Data transfer option for EMR integration
- Data export option to CD-RW or USB Flash Drive
- Network printing capability

Enhanced Cataract and Phakic IOL capability



Advanced Formulas for confident Surgical Planning

- 3rd and 4th generation IOL power formulas
- Direct data export option to Holladay IOL Consultant Professional Edition
- Power calculation for angle-supported, iris-fixated and posterior chamber IOLs
- Post-refractive surgery IOL power calculation options

Technical data

IOLMaster

Measurement range

Axial length 14 – 40 mm

Corneal radii 5 – 10 mm

Anterior chamber depth 1.5 – 6.5 mm

White-to-white (optional) 8 – 16 mm

Measurement resolution (as displayed)

Axial length 0.01 mm

Corneal radii 0.01 mm

Anterior chamber depth 0.01 mm

White-to-white 0.1 mm

Formulas for IOL calculation

SRK® II, SRK®/T, Holladay, Hoffer Q, Haigis

Formulas for calculating the corneal power after refractive corneal surgery (clinical history method and contact lens method)

Haigis-L (for myopic LASIK/PRK); calculation of iris, chamber angle or posterior angle supported phakic implants

Optimization of IOL constants

Data transfer to office management systems or PC

Data export to CD-RW or USB Flash Drive

Data export option to Holladay IOL Consultant (not included)

Compliance with USA HIPAA directive governing user authentication and identification

Line voltage 100 - 240 V +/- 10% (self-adjusting)

Line frequency 50 – 60 Hz

Power consumption max. 90 VA

Laser class 1

Optional accessories:

Asymmetrical instrument table

Keyboard support

Printer

Isolation transformer

Network isolator

Paper for chinrest

Software Option A plus

• Corneal Power Correction after

Corneal Refractive Surgery

• Haigis-L Formula for Power

Calculation after myopic

LASIK/PRK

• Power Calculation of

Phakic Implants

• White-to-White Measurement

- 4 in 1 (Multiformula) - lens power of one IOL with 4 different formulas

- Data export to USB Flash Drive or CD-RW

- Ethernet Data Transfer to Holladay IOL Consultant Professional Edition (Holladay 2 Formula)

- Software Option B

- Data Export to PC Client

(Option B needs Option A plus)

Software Option A plus and Option B

are offered together in the USA as the

Enhanced Refractive Module.

