

-150°C Cryogenic Freezer

**Safe, Economical Air Phase Cryogenic Storage
Without Liquid Nitrogen**

8.2 cu. ft. | 231 L



MDF-C2156VANC-PA | 10046-900

The -150°C cryogenic freezer offers air phase cryogenic storage without the need for liquid nitrogen as the primary cooling medium. The hybrid auto-cascade refrigeration system delivers superior uniformity at cryogenic temperatures without stratification.

Reliable Sample Security

Powered by a robust auto-cascade refrigeration system, this chest freezer delivers superior cooling and temperature performance, leading to faster pull-down speeds and unsurpassed temperature uniformity throughout the freezer chamber. Performance and reliability are not dependent on LN₂.

High Capacity Storage, Minimal Footprint

The use of patented VIP Plus cabinet insulation technology dramatically reduces cabinet wall thickness, allowing for higher capacity storage in a smaller footprint. This efficient layout enables storage of up to (165) 2" boxes or (105) 3" boxes, requiring only 13.07 sq.ft (1.15 m²) of lab space.

Safe, Economic Alternative

This innovative PHCbi brand -150°C cryogenic freezer eliminates hazardous operating conditions and frequent maintenance and cost requirements associated with LN₂ storage, and minimizes the possibility of cross-contamination among multiple samples in cryogenic storage.



Energy Efficiency

Energy efficiency in our cryogenic freezers is achieved through balanced temperature performance and power management, making them an economical choice when replacing existing liquid nitrogen freezers or installing new long-term product storage systems.



Precise Temperature Control

The integrated microprocessor-based controller and LCD graphic display enable intuitive management and monitoring of critical set points using a precise platinum RTD sensor, including touch keypads for setting freezer functions. Audible and visual alarms alert the user of out of range conditions.



Extra Protection, Easy Access

An LN₂ back-up system, included standard, adds an extra layer of protection. (Requires connection to external LN₂ supply.) An insulated locking lid with sub-lids minimizes cold air loss during routine access. Composite freezer wall insulation improves tolerance for high ambient temperature.

-150°C Cryogenic Freezer




MDF-C2156VANC-PA | 10046-900

Temperature

The graphs below show temperatures at different locations within the chamber. This data demonstrates that 100% of the storage maintains uniform storage temperatures safely below -130°C, while temperature in LN₂ vapor system is dependent on storage location.


Liquid Nitrogen Freezer

Vapor Phase



Model MDF-C2156VANC-PA | 10046-900


Mechanically Refrigerated Cryogenic Freezer



Comparison of temperature distribution in a LN₂ freezer (vapor phase) and Model MDF-C2156VANC-PA | 10046-900 mechanically refrigerated cryogenic freezer.

Dimensions

Unit : inch | mm

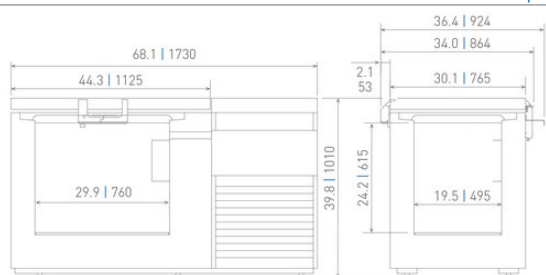

avantor
delivered by **vwr**

Prices, product, and/or services details are current when published and subject to change without notice. | Certain products or services may be limited by federal, state, provincial, or local regulations. | VWR, part of Avantor, makes no claims or warranties concerning sustainable/green products. Any claims concerning sustainable/green products are the sole claims of the manufacturer and not those of VWR International, LLC and/or Avantor, Inc. or affiliates. All prices are in US dollars unless otherwise noted. Offers valid in US and Canada unless otherwise noted, void where prohibited by law or company policy, while supplies last. | Trademarks are owned by Avantor, Inc. or its affiliates, unless otherwise noted. | Visit vwr.com to view our privacy policy, trademark owners, and additional disclaimers. © 2021 Avantor, Inc. All rights reserved.

VWR, part of Avantor is an authorized distributor for PHC Corporation of North America.

MDF-C2156VANC-PA | 10046-900

Model Number		MDF-C2156VANC-PA 10046-900
External Dimensions (W x D x H) ¹⁾	inches mm	68.1 x 30.1 x 39.8 1730 x 765 x 1010
Internal Dimensions (W x D x H)	inches mm	29.9 x 19.5 x 24.2 760 x 495 x 615
Volume	cu.ft. liters	8.2 231
Net Weight	lbs kg	716.5 325
Capacity (2" boxes)	qty	165
Capacity (3" boxes)	qty	105
Inventory Racks (2" boxes)	qty	15
Inventory Racks (3" boxes)	qty	15
Performance		
Warranty ²⁾		2 years plus 5 year compressor parts
Cooling Performance ³⁾	°C	-150
Temperature Setting Range ³⁾	°C	-125 to -152
Temperature Control Range ³⁾	°C	-125 to -150
Control		
Controller		Microprocessor
Display		LCD
Temperature Sensor		Pt-1000
Refrigeration		
Refrigeration System		Cascade with auto-cascade low stage
Compressors	W	(2) 1100, variable speed
Refrigerant		High-stage HFC Low-stage HFC Mixed
Insulation Thickness, Material	inches mm	5.31 135, rigid polyurethane foam (PUF) + VIP Plus vacuum insulated panels
Construction		
Exterior Material		Painted steel
Interior Material		Aluminum
Outer Door	qty	1 (key lock with provision for optional pad lock)
Inner Doors	qty	2 (insulated, ABS, stainless steel frames, positive latches)
Access Ports	qty	1: near temperature sensor
Access Port Diameter	inches mm	.5 12.7
Casters	qty	6 (3 leveling feet on front base)
Alarms		(V = Visual Alarm, B = Buzzer Alarm, R = Remote Alarm)
Power Failure		V-B-R
Temperature (High and Low)		V-B-R
Sensor Failure		V-B-R
Lid Open		V-B
Remote Alarm Contacts		DC 30V 2A (normally open, normally closed, common)
Electrical and Noise Level		
Power Supply		220V, 1Ø, NEMA 6-15P, requires NEMA 6-15R receptacle
Noise Level ⁴⁾	dB(A)	51
Temperature Recorder		
Circular Type	6", 7 day circular	MTRC954 97014-882
Chart Paper	52 charts per box	C72101106REV (-210°C to +110°C)
Ink Pen	pack of 6	R252
Optional Communication System		
Wireless, Cloud-Based, Automatic Data Management		LabAlert® Monitoring System

¹⁾ Exterior dimensions of main cabinet only, excluding handle and other external projections

²⁾ Current warranty offered at time of printing and may be subject to change; US and Canada only

³⁾ Air temperature measured at freezer center, ambient temperature +30°C, no load

⁴⁾ Nominal value, background noise 51 dB(A)

Specifications are subject to change without notice.

Performance data herein is based on independent testing at time of publication.