

Cee® 300X

Heavy-Duty-Drive Spin Coater

The Cee® 300X heavy-duty-drive spin coater combines an intuitive Windows®-based operating system, extremely accurate spin speed control, and a high horsepower drive for aggressive acceleration. These features combine to ensure the elimination of process variables for a large array of process chemicals and applications. The 300X has a state-of-the-art user interface and has been designed specifically for 300-mm and larger LCD squares up to 14" x 14".



Cost Effective Equipment

Serving the Semiconductor Industry Since 1987

2005X SN 8105105

Benefits


- ▶ Onboard Windows®-based PC control for enhanced interface capabilities and connectivity
- ▶ Enhanced lid-lift assist feature (gas spring opens $\geq 45^\circ$)
- ▶ New compact design for minimized footprint
- ▶ Full-color, 7-inch touch screen display
- ▶ Drive system (indirect) with highest horsepower in its class
- ▶ Compatible with stand alone exhausted cabinet (chemical storage)
- ▶ Optional X-PRO workstation integrates stand-alone cabinet with an upper exhaust enclosure for creating a mini-environment (monitors and logs data on ambient conditions)

Dimensions

- ▶ Machine weight: ~115 lb (52.2 kg)
- ▶ Shipping weight: ~250 lb (113.4 kg)
- ▶ Cabinet dimensions: 27.75 in (70.5 cm) W x 34.75 in (88.3 cm) L x 20.25 in (51.5 cm) H

Programmability

- ▶ PC-controlled
- ▶ Touch screen interface and display
- ▶ 250,000 process recipe programs on board
- ▶ A virtually unlimited number of user-defined recipe program steps
- ▶ 0.1-second resolution for step times (9,999.9 seconds maximum step time)
- ▶ Spin speed: 0 to 6,000 rpm (4,000 rpm and 3,000 rpm option available for additional acceleration capabilities)

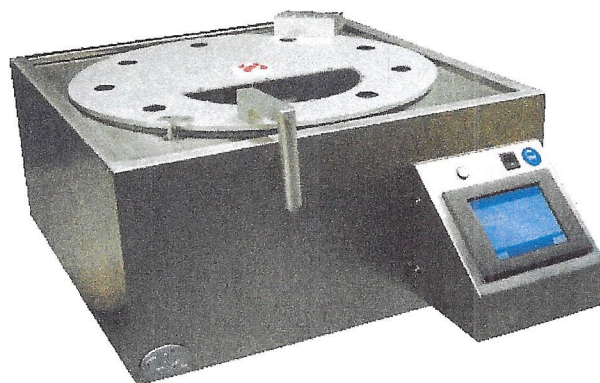

Cee® 300X heavy-duty-drive spin coater

- ▶ Spin speed acceleration:
 - 0 to 30,000 rpm/s unloaded
 - 0 to 23,000 rpm/s 300-mm substrate
 - 0 to 3,000 rpm/s 350-mm x 6-mm round recessed spin chuck
 - 0 to 400 rpm/s 14" x 14" x 1.1-mm in photomask recessed chuck
- ▶ Connectivity: USB/Ethernet port for communications for uploading/downloading process parameters with offline firmware standard (offline recipe number and steps unlimited)
- ▶ System capable of controlling third-party host software for high-end IDI/Cybor/Mykrolis positive displacement pumps
- ▶ Capabilities to simultaneously trigger multiple (up to 16) automated dispense nozzles
- ▶ Bidirectional speed control/oscillating chuck
- ▶ Iteration software (recipe looping)
- ▶ Dispense or component outputs: 50
- ▶ Security: Password protection option available at no charge
- ▶ In-process dynamic speed acceleration control

Precision

- ▶ Spin speed repeatability: < 0.2 rpm
- ▶ Spin speed resolution: < 0.2 rpm
- ▶ Substrate sizes: < 1 cm to 450 mm round; 14" x 14" square

Reliability


- ▶ Indirect drive system protects the spin motor from contact with process chemicals and solvents
- ▶ Vacuum and lid interlock
- ▶ Industry-leading reliability and uptime
- ▶ 1-year full warranty on parts and labor
- ▶ Free remote technical support (phone, email, fax) for the life of the product
- ▶ Application process assistance for the life of the product

Bowl and Exhaust Hood Design

- ▶ All stainless steel construction
- ▶ Optional ETFE-coated spin bowl for material compatibility
- ▶ Optional Teflon®/polyethylene bowl (non-disposable bowl liner)
- ▶ Optional closed and open lid design for process flexibility
- ▶ Optional Teflon®/polyethylene splash ring
- ▶ Drain and exhaust ports located in the bottom of bowl
- ▶ Optional nitrogen purge for an inert spin environment

Utilities

- ▶ Power requirements: 200–240 VAC, 1350 watts, 7.0 amp
- ▶ Drain port: 1" OD
- ▶ Exhaust port: 1.5" OD
- ▶ Vacuum: 20–25 in Hg
- ▶ Exhaust: 20–50 cfm at 0.2 in water
- ▶ Nitrogen or CDA (for automated dispense): 70 psi

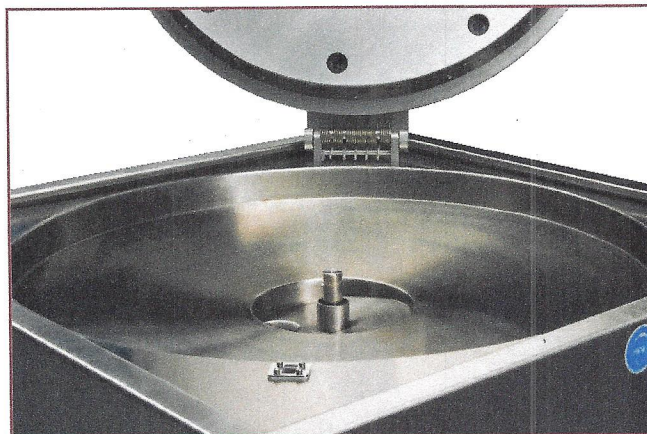

Cee® 300X spin bowl



Cee® 300X spin bowl with 300-mm wafer

©2017 Cost Effective Equipment, LLC. All statements, technical information and recommendations contained herein are based on tests we believe to be accurate, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of warranty expressed or implied. Neither the seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising from the use or inability to use the product. Before using, user shall determine the suitability of the product for his intended use, and user assumes all risk and liability whatsoever in connection therewith. No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of the seller and manufacturer.

Teflon® is a registered trademark of E.I. du Pont de Nemours and Company; Windows® is a registered trademark of Microsoft Corporation.

F. 6.6.7050-A3 Effective Date 06/15/2017

Spin Coater Accessories

For CEE® Spin Coaters





The Cee® equipment line offers customized accessories and options. Not all options are available on every machine and model.

Serving the Semiconductor Industry Since 1987

Spin Bowl Material Options for Chemical Compatibility



Teflon® PTFE Spin Bowl

CEE® Apogee™ and X-Series spin coaters feature a standard PTFE Teflon® bowl and deliver the utmost in chemical compatibility for the widest array of process chemistries. Teflon® material is exceptionally easy to clean and features an extremely high thermal budget (225°C).

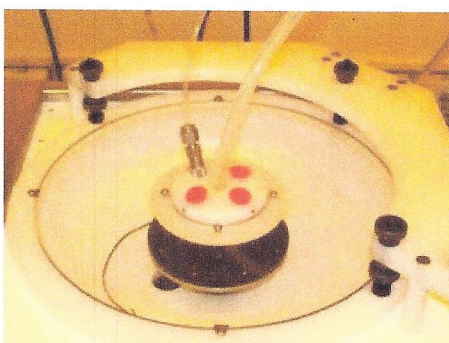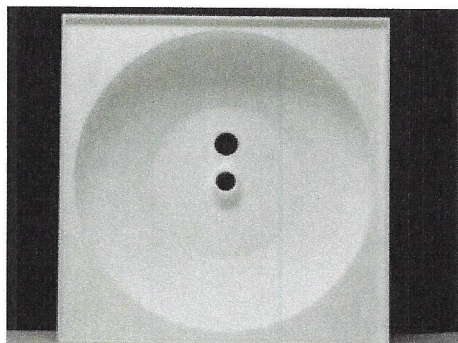


Ultra-High Molecular Weight (UHMW) Polyethylene (PE) Spin-Bowl

The UHMW PE spin bowl is by far the most commonly used of all our available spin bowls, and the volumes of scale allow for significant savings for our educational package. The UHMW PE material offers a much wider range of chemical compatibility than stainless steel and can be upgraded to Teflon® material.

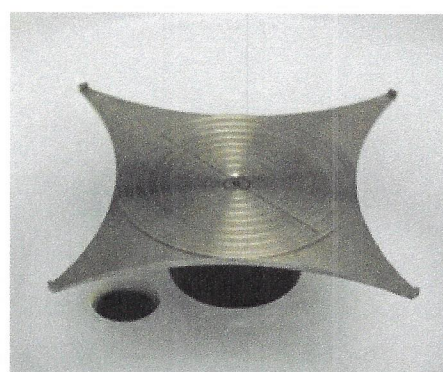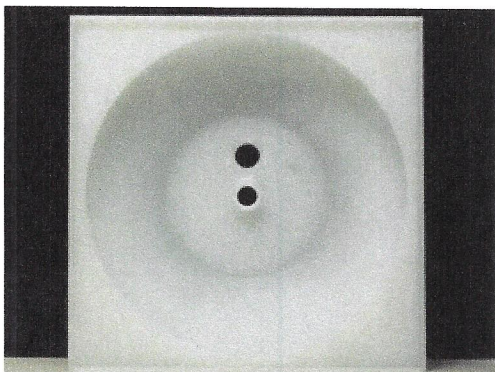

Stainless Steel Spin Bowl


The CEE® equipment line continues to offer a 100% stainless steel exterior material package and stainless steel spin bowl. This material provides corrosion resistance for a wide range of standard solvent and aqueous-based process materials. It features the greatest strength-to-weight ratio of any bowl material offered, allows for easy cleaning, and provides a highly aesthetic appearance.

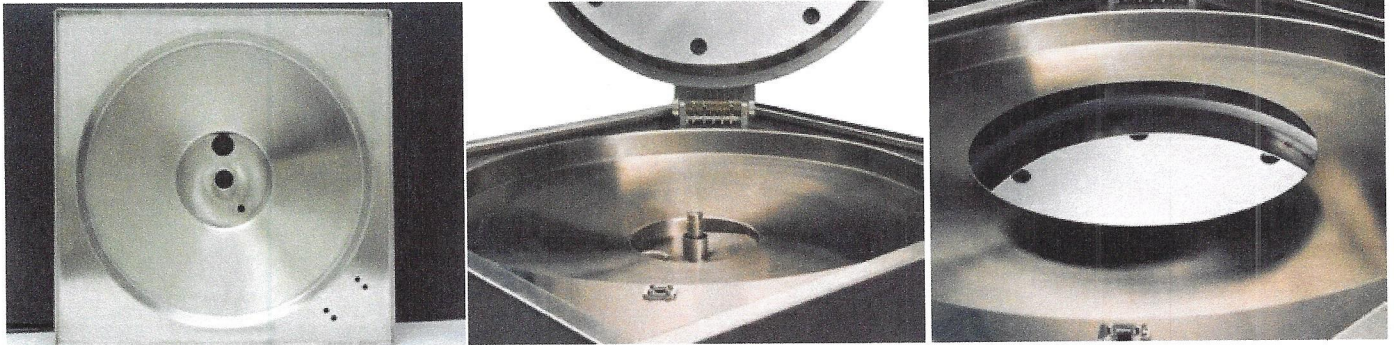

Mechanical Centering Device Options

Stationary Stainless Steel Centering Device Setup and Centering Fixtures

The optional stainless steel centering device is mounted stationary to the outer spin bowl flange. The device is normally housed in a vertical position outside the bowl environment and is moved into a horizontal position during the centering procedure. The appropriate centering fixture (3 inches, 100/125 mm, 150/200 mm) is then attached in the appropriate location, thus providing two points to accurately center the substrate. This option is very flexible for a wide array of substrate and spin chuck sizes.

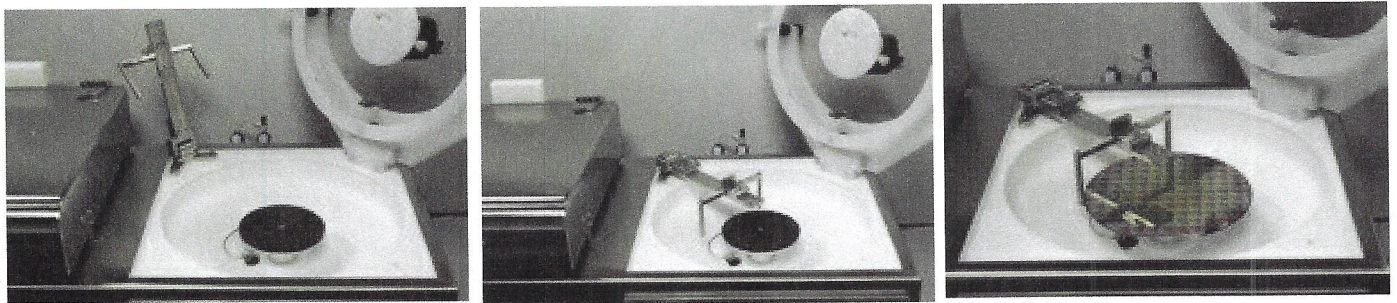

Size/Chuck Specific Handheld Centering Device



The handheld centering device can be used for specific sizes and is very cost-effective. This component will positively mate to the side of a specific chuck and allow for quick alignment of the referenced size. Handheld devices are available for 2- and 3-inch and 100-, 125-, 150-, 200-, and 300-mm sizes.



Spin Chamber Environment Options & Accessories


Programmable Spin Bowl Exhaust

The programmable exhaust option can be set upon either a spin coater or a developer, most commonly on a spin coater. This option allows the user to program the amount of exhaust flow at each step of the recipe. This capability can be very beneficial for controlling the solvent enrichment in the bowl during the casting and spreading steps, as well as for exhausting solvent fumes from the bowl at the conclusion of the recipe. This option is very critical for achieving optimal coating uniformities (such as total thickness variation, or TTV) for medium- to thick-film resists.

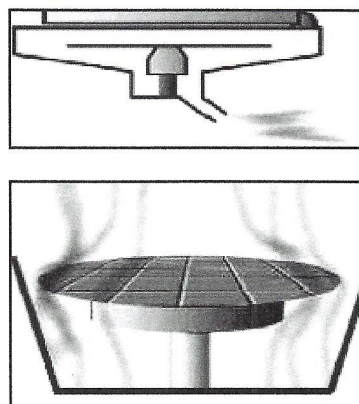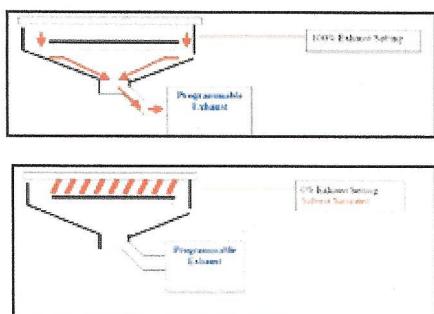


Idle Exhaust Control Feature

The programmable exhaust (see figure below) will allow the user to set a predetermined default position and subsequently control the exhaust load/flow during ambient conditions. This capability may be beneficial for controlling or conserving the overall volume of air in the ambient lab conditions and/or for creating the optimal solvent enrichment for subsequent processes.

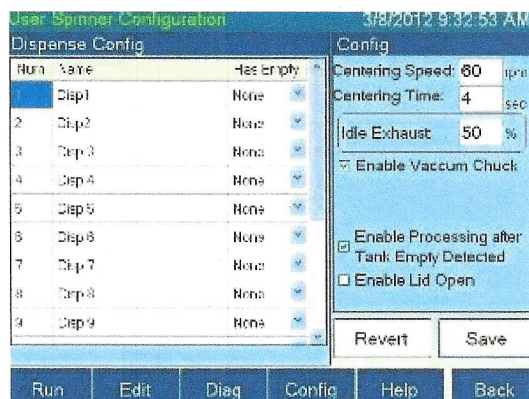


Manual N₂ Purge Lid

This accessory features four diffusers mounted in the spin bowl cover and allows a user to purge a (regulated) nitrogen supply into the bowl environment. This option includes a manual regulator to optimize the nitrogen flow rate and minimize the oxygen levels in the spin bowl. This feature offers a complementing programmable exhaust option for creating positive pressure inside the bowl chamber.

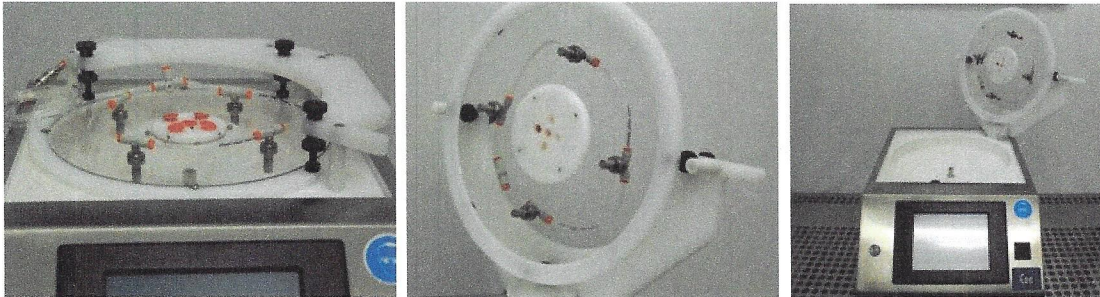


Splash Ring

The polyethylene splash ring sits within the outside diameter of the spin bowl and is constructed of ultrahigh-molecular-weight polyethylene material. This option will optimize the exhaust air flow at the edges of the spin chuck/substrate and mitigate the risk of materials hitting the straight sidewall of the spin bowl and rebounding to the device side of the wafer. The splash ring is inserted into the top of the bowl and provides a chamfered edge for catching cast materials. The splash ring also provides optimal conditions for edge uniformity to improve total thickness variation (TTV).

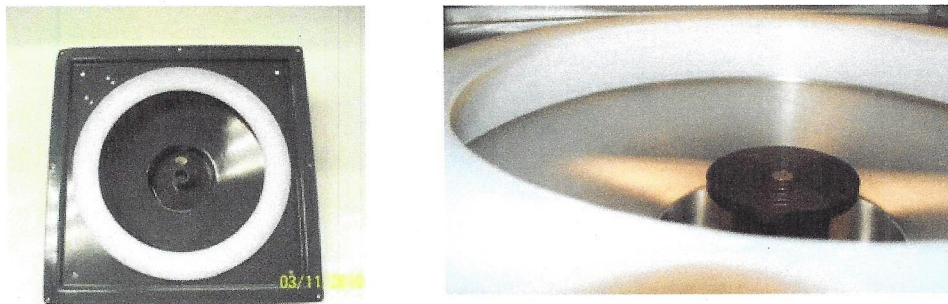

Reusable, Disposable Polypropylene Bowl Liners

These bowl liners are beneficial for reducing cleanup time after processing. The polypropylene liners exactly match the interior dimensions of the spin bowl. The standard liner (shown on left) allows the excess material to drain normally through the system. Many customers purchase two liners and swap them at the end of every business day. The contaminated liner is simply soaked in a solvent bath for cleaning. The liners are relatively robust and typically last 6–9 months in a lab environment. A raised lip version (shown on right) is also offered which captures any cast material in the liner for direct removal and prevents waste from entering the standard drain system.

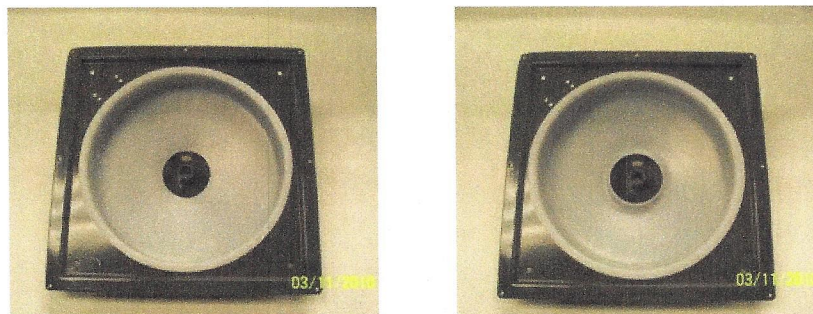

Spindle Drive Options (Speed and Torque)

6,000rpm High-Torque Option

One option for CEE® spin coaters is a spindle drive with the highest horsepower in the industry. The 6,000-rpm maximum torque option is recommended for customers interested in coating thick, heavy, irregularly shaped, or extremely large substrates (such as photomask blanks). CEE® equipment is able to process full 6 in x 6 in x 0.250 in photomasks with recessed spin chucks. Photomask weight is typically 2–3 pounds, depending on the material. Photomasks can achieve a speed of 6,000 rpm with an acceleration of 3,000 rpm/s. The 6,000-rpm maximum speed option will ensure that you can aggressively snap-spin the material and mitigate uneven drying of the film from center to edge.

12,000rpm, Medium-Speed, Medium-Torque Option

The 12,000-rpm option allows for all speeds from 1–12,000 rpm to be programmed and controlled. However, this enhancement will minimize the overall torque/acceleration capability by 10%–15%, compared to the 6,000-rpm option. The 12,000-rpm option is most often used for extremely small substrates, from <1 cm through 2 inches. We generally recommend the 12,000-rpm option for all standard-thickness semiconductor applications and the 6,000-rpm option for thick, heavy, irregularly shaped, or extremely large substrates.

16,000rpm, High-Speed, Low-Torque Option

Because of their specialized hardware and software, CEE® spin coaters offer the option of spin speeds of up to 16,000 rpm. Substrate size and acceleration rate become very critical issues when spinning at these higher speeds. A specialized captive and/or recessed chuck is strongly recommended for achieving the required center/balance position and maintaining positive grip of the substrate.

Indirect Drive: 6,000rpm Option

- Maximum acceleration for heavy/large and irregular shaped substrates
- 6" x 6" x 0.25" photomask recessed spin chuck (2lbs/0.9kg): 6000rpm/s, standard thickness Si (<1lb/0.4kg): 23,000 rpm/s ramp

Indirect Drive: 12,000rpm Option

- Optimal speed and acceleration levels for SEMI® standard thicknesses (50–200mm).
- 200mm Si with vacuum chuck (<1lb/0.4kg): 20,000 rpm/s ramp.

Indirect Drive: 16,000rpm Option

- Intended for small pieces or substrates with minimal radial velocity: 1cm x 1cm die (<0.5lb/225g): 16,000rpm/s ramp.
- Recommend custom captive/recessed chucks to attain proper alignment and maintain grip


Increasing Drive Ratio



Heavy Loads: 6" x 6" Recessed Photomask Spin Chuck



Moderate Loads: 4" Vacuum Chuck for 200mm Si Round




Limited Loads: 5/16" Spin Chuck for 1cm x 1cm die

Ancillary Spin Coater Accessories

X-PRO II Workstation


The CEE® X-PRO II workstation offers customized exhaust enclosures that integrate with their stand-alone cabinets and create a virtual clean room environment (commonly known as a mini-environment). The upper enclosures can be designed for ductless or ducted exhaust for preventing vapor fumes from contaminating the ambient lab environment. The enclosure can also be enhanced with fan filter units for vertical laminar flow and/or a particle filter (HEPA, ULPA, or carbon amine filtration) that can have various efficiencies (E*). The hood is also compatible with optional programmable meters for detecting and logging (with X-Series software) environmental conditions including air pressure, flow, humidity, and temperature stability and uniformity. The Apogee™ & X-Series software will automatically monitor these conditions in real time and provide users with the ability to program yellow-light warnings and/or red-light fault parameters. The workstation seamlessly combines Cee® precision equipment with these enhancements to create optimal turnkey processing solutions and deliver increased production yields in a small-scale lab setting.

*E = Percentage of restrained particles under defined conditions

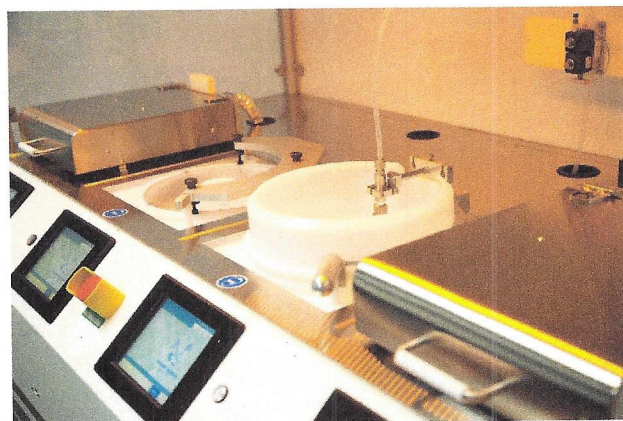

Stand-Alone Stainless Steel Cabinate with Exhaust



CEE® products offer a matching stainless steel finished cabinet with exhaust which provides secondary containment for all process chemicals, including the waste tank. This setup creates a fully capable stand-alone piece of equipment, and the system can be shipped fully assembled/installed in the cabinet. This option can also be combined with an upper exhaust enclosure for controlling vapor fumes and/or creating a mini-environment. The exhausted cabinet and upper enclosure options are both SEMI S2 and CE compliant.

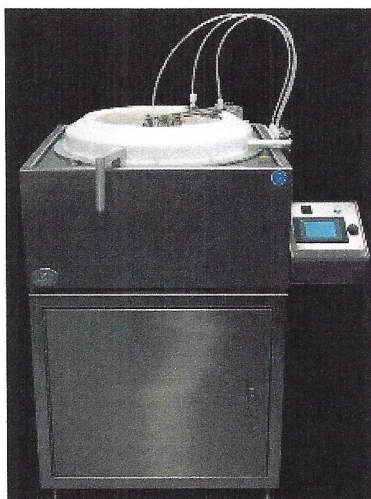

Drain Bottle Assembly with Full-Bottle Sensor


We offer a complete drain bottle assembly kit (with full-bottle sensor) for capturing spin-coating and developer (aqueous/solvent) waste. This assembly includes a 1- or 5-gallon drain bottle, drain hose, full sensor, and clamps for connecting to a CEE® spin coater. The capacitive sensor will alert when the bottle is full and allow the current recipe to conclude; however, it will not allow additional recipes to be initiated until the bottle is drained. This option ships with all necessary connecting hardware including:

- 1-Gallon (or 5-gallon) drain bottle
- 6ft of PTFE drain hose
- x2 1" hose clamps
- Custom drain bottle snout
- Capacitive sensor for triggering the bottle-full condition

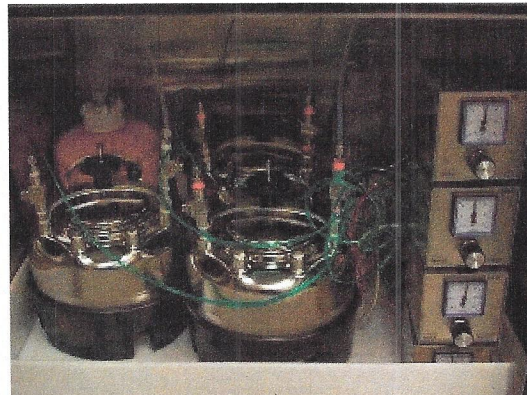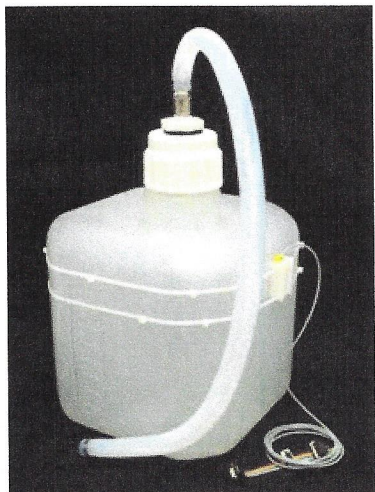

Vacuum Pumps

Cost Effective Equipment offers vacuum pumps that enable operation of the full CEE® equipment product line. The pumps offered can supply vacuum for one or two small machines (Net Motion) and/or provide the vacuum utilities for an entire fab (Edwards). The oilless Net Motion vacuum pump is suitable for clean room use, extremely compact, and very quiet (< 55 dB).

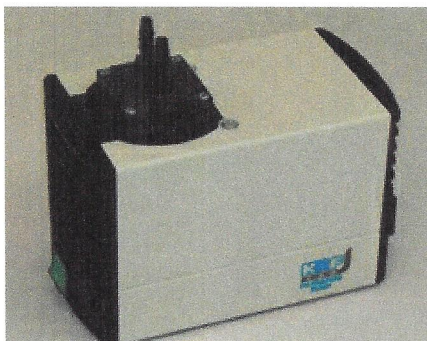

Bidirectional, Oscillating Speed Control

This option enables the user to oscillate the spin chuck direction to enhance the agitation effect for many develop, etch, and rinse materials. The time between oscillations is entered in seconds, and the system uses the previously programmed speeds and accelerations. (Oscillation mode is not available on all models.)

Recipe Manager 3/8/2012 9:23:58 AM


Recipe Name: CEE

RECIPE	Step	Velocity (RPM)	Ramp (RPM/s)	Time (sec)	Dispenses	Oscillation (sec)
Load...	1	100	1000	2	1,5,7	2
Save...	2	200	5000	2	2,8,9	2
Delete...	3	1000	5000	10	none	0
STEP	4	200	10000	30	none	10
Insert	5					
Delete						
Clear All						

Run Edit Diag Config Help Back

Program Recipe Iteration Looping

This option enables the user to create a multistep spin process that repeats consecutively based on the number of iterative loops programmed. By entering a value greater than 1 in the "Iterations" field, the iterative software will cause the process to run for the specific number of times. The tool will sound a slight alarm between runs, and the processes may be aborted in normal fashion. (Iteration looping is not available on all models.)

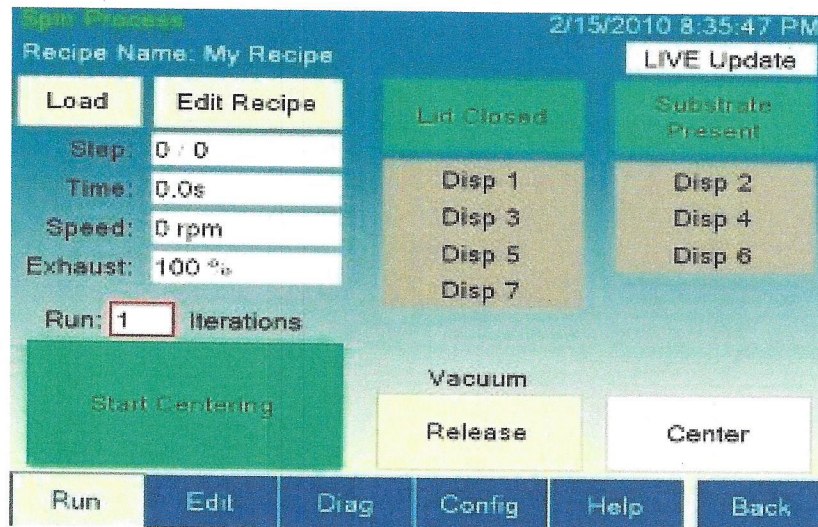

Remote Flange Mount Option (F-Designation)

CEE® equipment offers flange-mounted modules for all 200-mm spin coaters, bake plates, developers, and combination equipment, and this option is compatible with its specially designed wet bench/glove box. Customers can choose from either a deckmountable stationary display or a remote display control box (with umbilical cord). This option allows the unit to be mounted flush to the working surface, and the touch screen interface is mounted remotely on the deck or head casing. Cost Effective Equipment also has a long history of working with many of the industry's leading wet-bench manufacturers and can offer modules compatible with third-party wet benches. A typical module of this type measures approximately 13 in (W) × 19 in (D) × 12 in (H), including the lid.

