

## CUTTING EDGE. PROVEN. PRECISE.

With its superior power handling and precision control, the iQ System is designed for optimum temperature forcing. Its unique combination of proven methodologies and cutting-edge heat transfer technology can be expertly customized, no matter what your IC needs.

Sensata Technologies has an exceptional history of more than 95 years and is a leading supplier of Interconnect technology.

## iQ-PHASE THERMAL FORCING SYSTEM

*Precision, Wide Temperature Range, Portable*

Sensata's iQ-Phase Thermal Management System is designed with performance and flexibility in mind, allowing for customization to suit different package and interface variations. The system allows for temperature forcing across a wide range of device sizes and types, whether socketed or soldered down.

The well-proven, thermal head methodology coupled with the cutting edge liquid-less phase change heat transfer technology creates a very quiet, portable and fast stabilization thermal control environment. The vertically actuating thermal heads makes direct contact with your IC providing for far superior power handling and precision control over other thermal control methods.

### BENEFITS

- -55°C to 250°C
- Completely self-contained liquid free operation
- All package types
- Adapts to most sockets and boards
- Very quiet operation (<40dB)
- Small footprint
- Portable and rack mountable
- Worldwide power
- Residue free contact with DUT
- ECO Friendly lowest power consumption thermal forcing system

### APPLICATIONS

- Temperature Forcing
- Thermal Stream Replacement
- High Reliability Testing
- ATE, SLT and Bench
- OEM Integrations



**QUALITY INTERCONNECTION EXPERTS**

From Sensata Technologies





## SYSTEM SPECIFICATIONS

### OPERATING

Temperature range	-55°C to 250°C
Accuracy	±0.3°C
Transition Rate	Up to 70°C/min (ramp rate controllable)
Actuation Type	Z-Axis Lid Integrated
Actuation Force	Up to 55kg
Remote Sensor Types	2 – Type K Thermocouple Ports, Thermal Diode

### MECHANICAL

Controller Size WxHxD	480mm x 130mm x 400mm
Controller Weight	Approx. 15kg
Thermal Head Size WxHxD	59mm x 50mm x 59mm
Thermal Head Weight	Approx. 1kg
Controller to Thermal Head Distance	Approximately 2.5m

### DATA / COMMUNICATIONS


USB	Type B
Ethernet TCP/IP	RJ-45
Touch Screen Display	110mm Ruggedized LCD

### ENVIRONMENT / FACILITIES


Operating Temperature	-10°C to +45°C (non-condensing)
Power	100V to 240V AC 50/60Hz 6A MAX (100V) 2.5A MAX (240V)
Plug	C14
Compressed Dry Air	<1cfm @ 90psi (-55°C dew point)

## DIAGRAMS

CONTROLLER

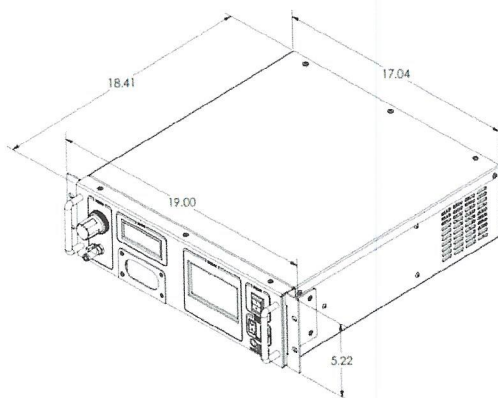

THERMAL HEAD

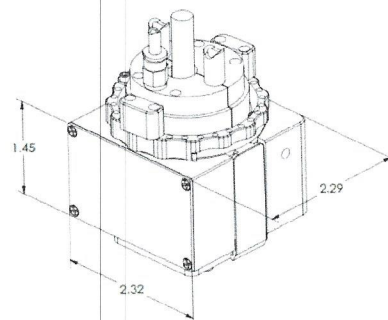

The World Depends on Sensors and Controls

**Qinex.com**

**Sensata Technologies, Inc.**

529 Pleasant Street  
Attleboro, MA 02703-2964  
U.S.A.

[Sensata.com](http://Sensata.com)

Email: [qinex@sensata.com](mailto:qinex@sensata.com)

Phone: 1-508-236-1306

©2013 Sensata Technologies, Inc. All rights reserved worldwide. Printed in U.S.A. Revised September 2013.

**Important Notice:** Sensata Technologies reserves the right to make changes to, or to discontinue, any product or service identified in this publication without notice. Before placing orders, users should obtain the latest version of the relevant information to verify that the information being relied upon is current.

Sensata Technologies assumes no responsibility for customers' product designs or applications. Users must determine the suitability of the Sensata device described in this publication for their application, including the level of reliability required. Many factors beyond Sensata's control can affect the use and performance of a Sensata product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. As these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the Sensata product to determine whether it is fit for a particular purpose and suitable for the user's application.

Sensata Technologies products are sold subject to Sensata's Terms and Conditions of Sale which can be found at [www.sensata.com/terms.htm](http://www.sensata.com/terms.htm)