

2 MW 2013 New MAN 9L21/31 HFO Generator



Harnessing Energy for Life

Specifications



Manufacturer	MAN
Model	9L21/31
Year	2013
Condition	Used
Location	Asia
Price	\$345,000.00
Category	HFO Generators
Subcategories	•1 - 9 MW
Stock Number	USP009428
Serial Number	-
Wattage	2 MW
Hours	New
Frequency	50 Hz
Fuel type	HFO
Balance of Plant Available? (BOP)	-



Harnessing Energy for Life

Description & Additional Notes

EXCLUSIVELY FROM USP&E!

USP&E is selling 2 MW 2013 New MAN 9L21/31 HFO Generator

Units available: 2 x

Engine

Maker: MAN

Model: 9L21/31

Year: 2013

Nominal rating: 1,980kWm

Cylinder configuration: L line

Number of cylinder: 9

Cylinder bore: 210mm

Stroke: 310mm

Revolution: 1,000rpm

Frequency: 50 Hz

Fuel: HFO

Starting media: Max 10bar, compressed air

Generator

Maker: Hyosung

Year: 2013

Rated output: 1,881kw/2,350KVA

Rated voltage: 6,600V

Rated speed: 1,000rpm

Rated frequency: 50hz

Number of phase: 3

Number of pole: 6

Efficiency at 0.8pf: 95% at full load



Harnessing Energy for Life

Description & Additional Notes

**Note that price is per unit

Images may be representative, and actuals can be supplied upon request.

USP&E offers complete turnkey design, installation, EPC and O&M services with PERFORMANCE GUARANTEES anywhere in the world (sanctioned countries only).

USP&E offers full warranty and guarantees on our EPC and O&M projects and couples this with our own proprietary power plant optimization software tool called SMARTpower.

SMARTpower offers predictive analytics and real-time reporting, spares control, and KPI management all in an elegant dashboard annunciated to your handheld.

With onboard predictive analytics powered by machine learning and advanced a.i., SMARTpower saves our clients millions of dollars per year in fuel and spares costs while optimizing asset life.

We look forward to working with you! Call or email us today at info@uspeglobal.com



Harnessing Energy for Life

Description & Additional Notes



The responsible way in leading technology

MAN Diesel & Turbo is the world's leading designer and manufacturer of low and medium speed engines – an estimated 50% of the world marine trade is powered by engines from MAN Diesel & Turbo.

We develop two-stroke and four-stroke engines, auxiliary engines, turbochargers and propulsion packages that are manufactured both within the MAN Diesel & Turbo Group and at our licensees.


The foundation of MAN Diesel & Turbo's success in all applications, marine or stationary, is our unparalleled understanding of large engine technology. A vital part of our leadership stems from a firm belief

in the 'total systems approach' to engine building based on the identification of core competences and the pursuit of excellence in these areas.

Basic concept

The cleanlined 'pipeless' design philosophy characterises the latest generation of MAN Generating Sets. A prize-winning concept, which has secured MAN Diesel & Turbo more awards. New ideas and features, however, are based on proven solid GenSet heritage. The MAN brand, has during generations, maintained and developed its position as the leading HFO-burning marine GenSet design.

MAN L21/31 GenSet power for marine applications

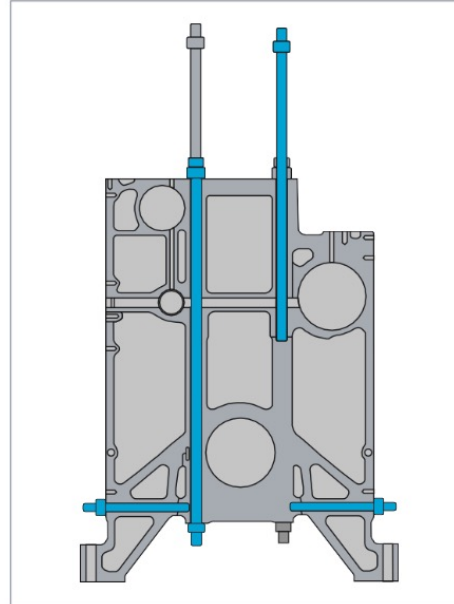

Engine block cross section




The GenSet is designed as one unit, on a tailored and integrated base frame, complete with alternator and engine, with built-on auxiliary systems.

The hydraulically tightened tie rods are specifically positioned to maintain a static preloading of the engine block to absorb the dynamic loads generated by the impact from the combustion process and moving masses.

The complete GenSet is resiliently seated, vibration-analysed and balanced, and enclosed with specially designed covers to transmit minimal structure-borne and air-borne noise to ship and engine room.

Economic advantages

The MAN L21/31 units are characterised by reliable and HFO-based GenSet power, delivered at the lowest possible accumulated costs during the entire life cycle. A safe investment.

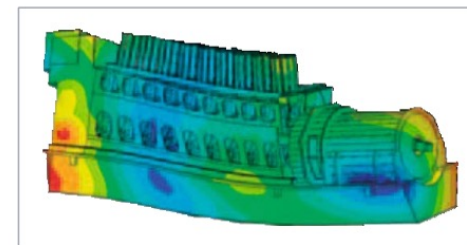



Harnessing Energy for Life

Robustness and Reliability for long-term trouble-free operation

Careful focus on key components

Fuel injection pump. The fuel injection pump, with integrated roller guide, is designed for safe cam contact. High injection pressure ensure perfect atomisation and efficient combustion of the heavy fuel oil. Low smoke values – 'invisible smoke' – is obtained over the entire load range.


Camshafts. The camshafts are located for individual and direct activation of the fuel pump and valve gear respectively. Twin camshafts offer timing flexibility and special adaption possibilities. Surface hardened camshaft sections, optimally profiled for perfect activation, ensure good performance and long-term reliability.

Cylinder liner with flame ring. A thick-walled liner casting, which is cooled at the top, ensure stable geometry and good piston operating conditions under varying loads. The flame ring prevents bore polishing, ensures long liner life and low lube oil consumption.

Piston and ring pack. A robust composite piston design, with bore-cooled steel top, is the optimal choice for modern, high performance heavy fuel oil engines. The piston rings employ a special shape and material that control the wear properties for optimal long-term engine performance.

Crankshaft and counter-weights. The crankshaft is stiff and robustly designed, e.g. large crank pin diameters for large bearing surfaces. The finely tuned counter-weights on all crank webs reduce bearing loads and ensure a balanced and vibration-free engine.

Bearings. The long lifetime of bearings in general has been achieved through the use of the latest bearing materials in over-sized dimensions throughout the Gen Set. Reduced stress, low specific bearing loads and large safety margins for the oil film improves the reliability of all components.

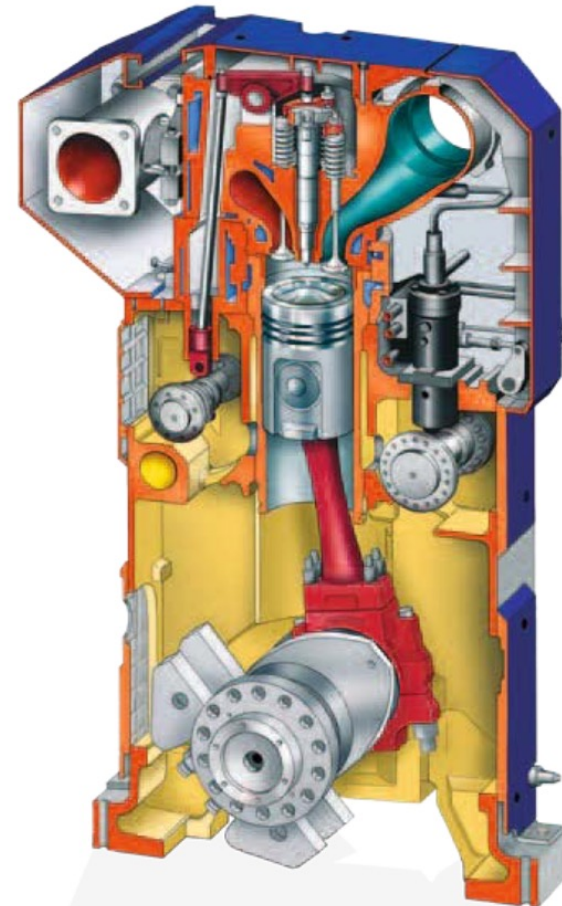



Harnessing Energy for Life

Unique Design Features and key component benefits


Crossflow cylinder head

The unique, crossflow designed cylinder head geometry, together with flow-optimised charge air and exhaust gas ducts produce the combustion chamber swirl-effect. This is the basis for a perfect mix of air and atomised fuel, optimal gas exchange and efficient combustion.

Efficient MANTurbocharger

MAN Diesel & Turbo's latest TCR design of constant pressure high-efficiency turbocharger, with good acceleration properties, carefully matched with the engine gas exchange system, ensure charge air surplus at all engine loads and ability to handle large step loads with minimal smoke emission.

Long life and easy servicing are key parameters for the turbochargers. Overhaul and simple inspection intervals are extended to follow other routine maintenance of the engine.

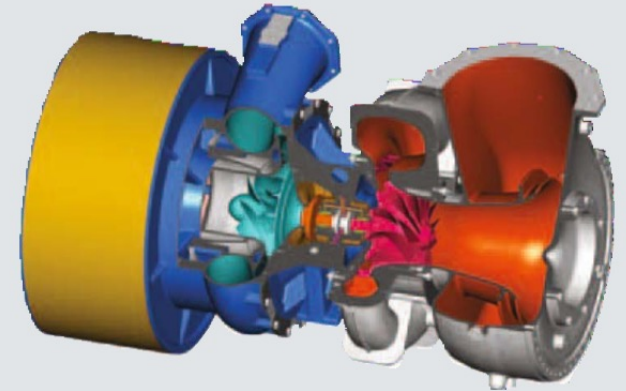

Marine head connecting rod

A unique, 'no compromise' design feature for this size of engine. Due to the optimal flow of combustion forces, the solidly designed connecting rod with marine head offers stiffness and a high safety margin, which ensures an ideal housing for a good and stable long term bearing condition. For safe handling, the connecting rod is fitted with hydraulically tightened nuts. When pulling a complete cylinder unit with piston, the marine head connecting rod is dismantled without opening the big end bearing on the crankshaft.





Harnessing Energy for Life

Integrated Auxiliary Systems

Temperature control, flow and cleanliness

For easy installation and maximum operational safety, the auxiliary systems are integrated and self-supported with the engine. The engine's advanced front-end box, which carries the turbocharger and charge air cooler, also incorporates engine driven cooling water pumps, lube oil pump, lube oil cooler, double full-flow depth lube oil filter and thermostatic valves.

Cooling water system

With only two flange connections, the system is easily handled by the shipyard. Optimal temperatures are ensured at all engine loads by each GenSets' intelligent and self-regulating internal cooling circuits. The charge air cooling/preheating is controlled in a two-stage system. The low temperature circuit controls the charge air (in 2nd stage of the charge air cooler) and the lube oil temperature, whereas the high temperature circuit controls the temperatures in the cylinder heads, the water jackets around the combustion areas and in the 1st stage of the charge air cooler.

Lubricating oil system

For maximum safety against possible contamination, the lube oil system, including filter and cooler, is a completely closed circuit. The full-flow lube oil filter has a mesh-size of 10-15 microns, for maximum operational protection.

- (1) To/from central FW cooler
- (2) Engine driven FW HT pump
- (3) Engine driven FW LT pump
- (4) FW HT thermostatic valve
- (5) FW LT thermostatic valve
- (6) Two stage charge air cooler
- (7) LO cooler
- (8) Electrically driven pre LO pump
- (9) Engine driven LO pump
- (10) LO thermostatic valve
- (11) LO filter – duplex full flow depth type
- (12) Water mist catcher (optional)
- (13) Preheater – electrical
- (14) Preheating valve
- (15) Non-return valve with restriction
- (16) To expansion tank




Harnessing Energy for Life

Maintenance

Easy, simple and safe

- ④ (1) Cylinder unit – complete with piston
- ④ (2) LO by-pass centrifugal filter (optional)
- ④ (3) Two stage charge air cooler
- ④ (4) FW HT thermostatic valve
- ④ (5) FW HT pump
- ④ (6) FW LT pump
- ④ (7) LO cooler
- ④ (8) LO pump
- ④ (9) LO pre pump
- ④ (10) LO thermostatic valve
- ④ (11) FW LT thermostatic valve
- ④ (12) LO duplex full-flow depth filter

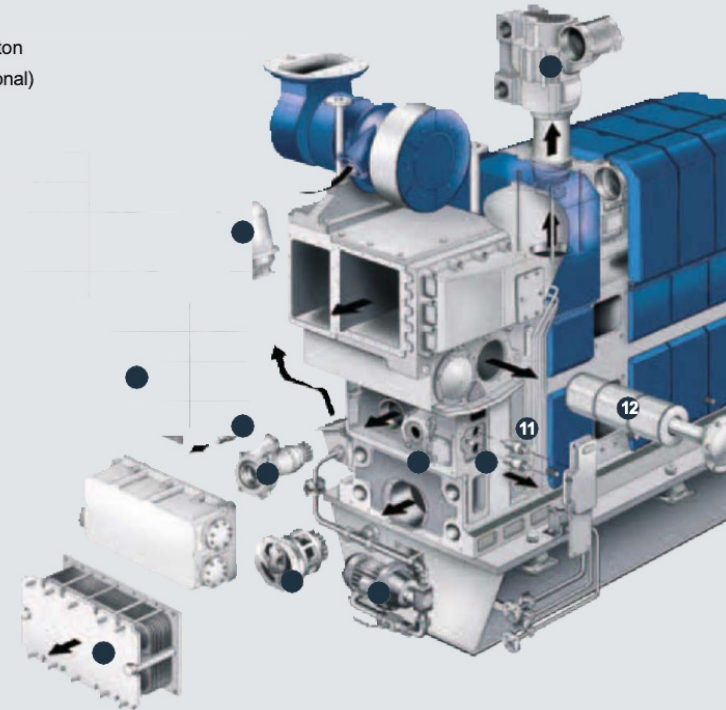

Favoured by operators

The L21/31 engine is designed for minimal daily maintenance, few routine inspections and long time between overhauls. Engine inspections and overhauls can be carried out with a minimum of resources due to the pipeless design, the front-end box and the cylinder unit concept.

The front-end box design and the cylinder unit concept incorporate many features designed to make maintenance safe, easy and quick. Pumps, thermostats and filters are replaced by simple plug-out/plug-in actions.

The cylinder unit is handled as a single, complete removable item including piston and connecting rod, cylinder liner, water jacket and cylinder head.

Large engine covers provide quick, clear and easy access for inspections, overhauls and the necessary tools. Hydraulic tools are standardised for quick, easy and safe dismantling and assembly of, e.g., tie bolts/nuts for cylinder heads and connecting rods.



Harnessing Energy for Life

Maintenance

Easy, simple and safe



Exchange service

The cylinder unit concept is ideal for various exchange service agreements.

A remarkable operator benefit realised by the engine's cylinder unit concept is the very short time needed to bring an engine back into service when replacing/ overhauling the unit components. Maximum availability is ensured since the GenSet quickly can be brought back on the grid with a new set of interchangeable units, while the used set can be overhauled onboard – or, alternatively, be sent ashore for an authorised factory overhaul.

MAN PrimeServ's attractive 'EMC-Pit Stop' containerised exchange service option reduce the number of spares needed on board, including complete cylinder units – the spares being delivered when you need them.

CoCoS

CoCoS-EDS (Engine Diagnostics System) is a software developed by MAN Diesel & Turbo. CoCoS-EDS handles data logging, monitoring, trends and diagnostics. It can be operated with manual data entry or with operating values automatically transferred from the engine's monitoring and alarm system.

The comparison of actual running performance with the ideal situation permits the identification of problems and irregular running conditions. Data – presented as graphs, bar charts or alphanumerically – includes operating and reference values, pressure curves, load diagrams, characteristics maps and performance curves.



Harnessing Energy for Life

Installation

Lift on board, plug and play

System connections:

- (1) Fuel oil
- (2) Cooling water
- (3) Cooling water venting/preheating
- (4) Exhaust gas
- (5) Crankcase ventilation
- (6) To lube oil separator
- (7) Lube oil overflow
- (8) From lube oil separator
- (9) Turbocharger venting
- (10) Starting air
- (11) Control, monitoring and alarm
- (12) Power cables



One compact unit

The L21/31 GenSet is supplied as a compact and very shipyard friendly unit. An efficient power package on an installation-ready common base frame – which takes up less space than comparable long-stroke engine powered GenSets.

Save time and money

Easy seating and alignment simplifies the shipyard's tasks and reduces the man-hours needed to complete the work. Additionally, a minimal number of connecting points for, e.g., electrical cabling and pipe connections to the front-end box are easy accessible and optimally positioned for integration with the ship's auxiliary systems.

10 simple steps

– as part of the installation check list:


- Lift the GenSet on board
- Seat and align the unit on the foundation
- Connect cooling water
- Check lube oil connections
- Connect fuel oil
- Connect starting air
- Connect exhaust gas outlet
- Arrange for ventilation
- Connect electrical power cables
- Connect electrical control and alarm cables



Harnessing Energy for Life

Environmental Characteristics

Well prepared for the future

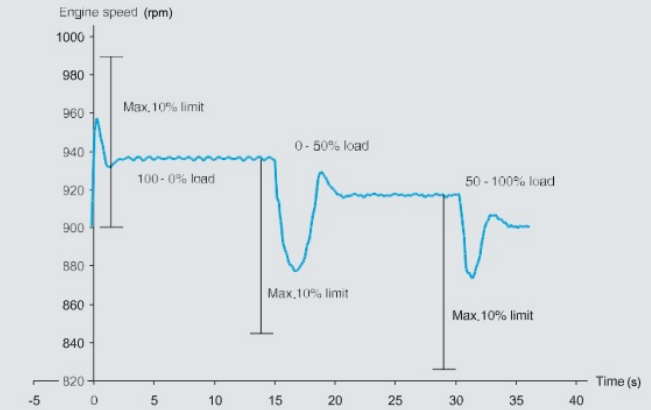

Perfect load respons

Low sound levels

Together with the L21/31 engines' double block structure, special noise dampening engine covers are applied and result in low average sound levels.

Invisible smoke

Low 'invisible smoke' values are obtained within the L21/31 GenSets' operating area. The smoke emission is suppressed at sudden load changes. Due to the lambda controller system, efficient turbo-charging and gas exchange system – the GenSets have proven unique ability to take 100% load in only two steps with a minimum of visible smoke.

Man and machine

Operator safety and handling friendliness have been given high priority, with extensive use of ergonomically correct solutions related to lifting gear, hydraulic tools, flanges and couplings.

Exhaust gas emission

As standard the NO_x exhaust gas emissions from the L21/31 engines are below today's IMO Tier II limits.



Harnessing Energy for Life

Installation

Lift on board, plug and play


Measures for reducing NO_x emissions

The latest step in the development of the MAN engine range is across-the-board compliance with the limits specified in Tier II of the emissions legislation of the International Maritime Organisation, IMO. Reduced emissions of oxides of nitrogen (NO_x) while still maintaining optimum operating economy:

Low swirl cylinder head. A primary line of attack in the fight against emissions is optimising the mixing of the fuel and the combustion air in the cylinder. The new low-swirl cylinder heads now used enable more favourable gas-flow and hence an improvement in the NO_x-SFOC trade-off.

TCR with RCF33 wheel. The use of MAN type TCR radial turbochargers equipped with the RCF33 compressor wheel can alleviate the NO_x-SFOC trade off. The better pressure ratio of the turbocharger increases the efficiency of the engine and thus compensates the increase in SFOC normally associated with the lower NO_x emissions.

Retarded injection. As a counter-measure to the formation of NO_x at high combustion temperatures, injection timing is retarded. Combustion heat release is thus delayed resulting in lower combustion chamber temperatures.

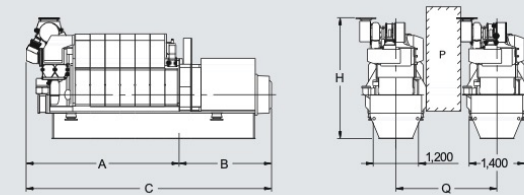

Speed (r/min)	900		1,000	
Frequency (Hz)	60		50	
	Eng. kW	Gen. kW*	Eng. kW	Gen. kW*
5L21/31	1,000	950	1,000	950
6L21/31	1,320	1,254	1,320	1,254
7L21/31	1,540	1,463	1,540	1,463
8L21/31	1,760	1,672	1,760	1,672
9L21/31	1,980	1,881	1,980	1,881

Cyl. No.	5	6	7	8	9
A (mm)	3,959	4,314	4,669	5,024	5,379
B (mm)	1,870	2,000	1,970	2,250	2,400
C (mm)	5,829	6,314	6,639	7,274	7,779
H (mm)	3,183	3,183	3,183	3,289	3,289
Dry Mass (t)	21.5	23.7	25.9	28.5	30.9

Bore	210 mm
Stroke	310 mm
Cycle	Four-stroke
Cyl. configuration	In-line
Power range	1,000-1,980 kW
Speed (60/50 Hz)	900/1,000 r/min
Mean piston speed	9.3/10.3 m/s
Mean effective pressure	24.8-27.3 bar
Power per cyl.	200-220 kW
Max combustion pressure	200 bar
Fuel acceptance	MDO, MGO and HFO up to 700 cSt/50°C


* Based on nominal generator efficiencies of 95%

P: Free passage between the engines, width 600 mm and height 2,000 mm
Q: Min. distance between centre of engines: 2,400 mm without gallery - 2,600 mm with gallery.



Harnessing Energy for Life

MAN L21/31 Genset

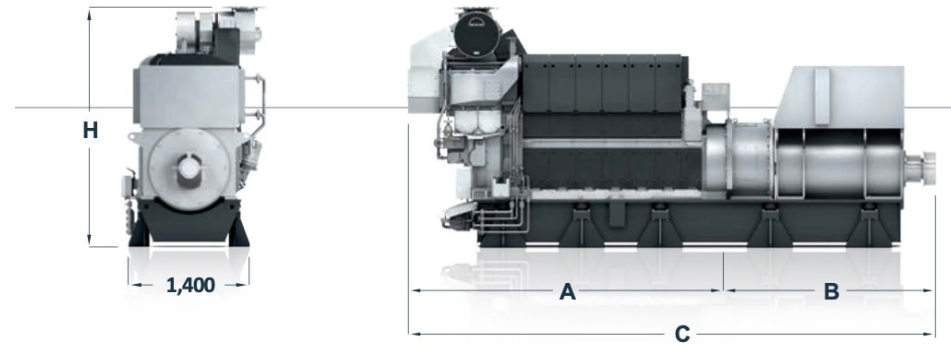

Dimensions

Cyl. No.	5	6	7	8	9	
A	3,959	4,314	4,669	5,572	5,927	mm
B	1,870	2,000	1,970	2,110	2,135	mm
C	5,829	6,314	6,639	7,682	8,062	mm
H	3,183	3,183	3,289	3,289	3,289	mm
Dry mass	22.5	26.0	29.5	33.0	36.5	t

Output

Speed	900	900	1,000	1,000	rpm
Frequency	60	60	50	50	Hz
	Eng.	Gen.*	Eng.	Gen.*	
MAN 5L21/31	1,000	950	1,000	950	kW
MAN 6L21/31	1,320	1,254	1,320	1,254	kW
MAN 7L21/31	1,540	1,463	1,540	1,463	kW
MAN 8L21/31	1,760	1,672	1,760	1,672	kW
MAN 9L21/31	1,980	1,881	1,980	1,881	kW



Harnessing Energy for Life

MAN L21/31 Genset

General

- Engine cycle: Four-Stroke
- No. of cylinders: 5, 6, 7, 8, 9
- Bore: 210 mm – Stroke: 310 mm
- Swept volume per cyl: 10.74 dm³

Fuel consumption at 85 % MCR

- SFOC: 189 g/kWh

Cylinder output (MCR)

- At 900/1000 rpm: 220 kW
- Power-to-weight ratio: 19.4 – 22.5 kg/kW

Compliance with emission regulations

- IMO Tier II
- IMO Tier III (with MANSOR)

Main features

- **Turbocharging system**
High efficiency constant pressure MANTORseries exhaust turbocharging system Jet Assist for improved load response and start up time
- **Engine automation and control**
MAN in-house developed engine attached Safety and Control System SaCoS_{one}

Conventional main injection system Variable injection system for lowest fuel consumption while meeting IMO Tier II emission limits

- **Cooling system**

1-string high and low temperature cooling water systems

- **Starting system**

Pressurized air starter (turbine type)

- **Engine mounting**

Common base frame for engine and alternator with integrated lube oil service tank and resilient mounting

- **Engine design**

“Pipeless engine” design. Cooling water/ lub oil pumps, thermostatic valves integrated in the front end box

Optional equipment

- 100 % PTO on front-end with build on bearing enable Fi-Fi equipment

Asset Images



- Images may be representative, and actuals can be supplied upon request.

Asset Images



- Images may be representative, and actuals can be supplied upon request.



Harnessing Energy for Life