

# SX 10/15 LFP



## Key Features

- Single Phase Output
- User-friendly control and operator interface
- GSM Remote monitoring
- Stackable (up to 2 units)
- Easy handling
- Simple and fast commissioning



## Output Specifications

Nominal Output power (continuous)	kVA	10
Peak Output power (5s)	kW	18
Voltage	V	230
Frequency	Hz	50
Phase (s)		1
Nominal energy capacity	kWh	14.4
Reference ambient temperature	°C	25



## System data

System pass-through capacity	A	32
Operating temperature range	°C	-10.. +50
Degree of protection	IP	44
Sound Power (LWA)	dB(A)	73
Noise pressure @1m (LpA)	dB(A)	55




## Battery specifications

Battery modules quantity	n.	3
Module capacity	kWh	4.8
Battery (Type)		Li-Ion LFP
Battery rated Voltage	VDC	48
Depth of Discharge (DoD)	%	90
Battery design life	cycles	6000
Usable energy @ DoD / AC side	kWh	12.3
Total batteries weight	kg	120



### Instruments, controls & connections

Inverter protection Short Circuit	✓
Inverter protection Overload	✓
Inverter protection Over Temperature	✓
Inverter protection Low Battery	✓
System status control panel	✓
Battery condition	✓
Battery main isolator	✓
Remote monitoring device	✓
Automatic generator auto-start signal	✓
Parallel connector	✓

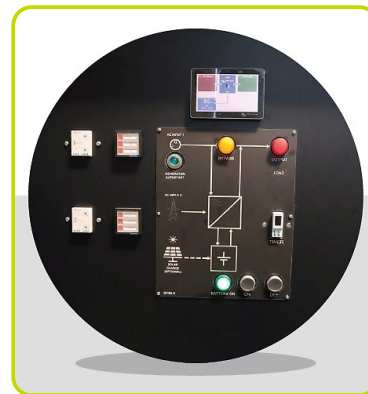

### Input Power Connection

32A CEE 2P+T	1
--------------	---




### Output Power Connection

16A Schuko	1
16A CEE 2P+T	1
32A CEE 2P+T	1
Individual RCD 1phase sockets	✓




### Overall Dimensions

Length	(L) mm	995
Width	(W) mm	595
Height	(H) mm	989
Weight	kg	330

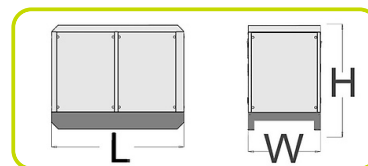

### Optional

1xSolar Charge Controller 5.8kW 250V	MPPT
Cold Weather Kit	CWK

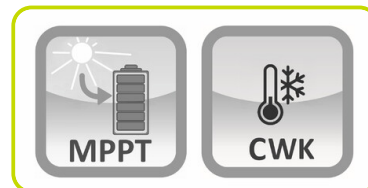

The information is aligned with the Data file at the time of download.  
Printed on 11/03/2025 (ID 194063)

©2025 | PR Industrial S.r.L unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

