

AT200A



FOR NEW EQUIPMENT SALES, CALL  
**800.958.2555**  
TO SPEAK WITH AN ALTEC REPRESENTATIVE  
or visit us online at [altec.com](http://altec.com)

 **Altec**  
TELESCOPIC  
AERIAL DEVICE

# AT200A

## FEATURES

- Non-Insulating Aerial Device
- All Steel Telescopic Boom Construction
- Hydraulically Extended Inner Boom
- Engine Start/Stop at Upper and Lower Controls
- Open-Center Hydraulic System
- 120 VAC Circuit at Boom Tip with GFI Outlet
- Minimum Chassis Requirement of 10,500 lb (4,763 kg) GVWR  
60 in (1,524 mm) CA or 84 in (2,134 mm) CA

## OPTIONS

- Pedestal or Bridge Mount
- Choice of Platform:
  - » Side or End-Mount
  - » Walk-In Round or Rectangular Splicer
- Hydraulic Leveling
- Electric/Hydraulic Single-Handle Variable Speed Upper Controller
- Inverter for 110V Power
- Variable Speed Controls
- Two-Speed Controls
- Choice of Hydraulic Reservoir:
  - » Bed-Mount
  - » Pedestal-Mount
- Airline to Platform
- Canopy and Curtain Assembly
- Manual Lowering Valve
- Heater for Platform
- Seat for Platform
- Tool Pouches and Trays
- Steel and Fiberglass Body Configurations are Available

Recommended safety equipment, available through Altec Supply, include fall protection system, wheel chocks, platform cover and strobe lights on turntable.



## OPTIONAL VARIABLE SPEED SINGLE-HANDLE CONTROLLER




For more complete information on Altec products and services, visit us on the web at [www.altec.com](http://www.altec.com). Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2017 Altec Inc. All Rights Reserved. AIOSAT200A-0315-v3

SPECIFICATIONS	
Ground to Bottom of Platform	
End-Mount	30.1 ft (9.2 m)
Additional Capacity End-Mount	28.4 ft (8.7 m)
Side-Mount	30.1 ft (9.2 m)
Working Height	
End-Mount	35.1 ft (10.7 m)
Additional Capacity End-Mount	33.4 ft (10.2 m)
Side-Mount	35.1 ft (10.7 m)
Maximum Reach from Centerline of Rotation	
End-Mount	22.7 ft (6.9 m)
Additional Capacity End-Mount	21.0 ft (6.4 m)
Side-Mount	20.7 ft (6.3 m)
Platform Capacity	
End-Mount	300 lb (136 kg)
Additional Capacity End-Mount	350 lb (159 kg)
Side-Mount	350 lb (159 kg)
Boom Articulation	-13.5 to 80°
Stowed Travel Height	11 ft (3.4 m)
Rotation	Non-Continuous, 370°

## REACH DIAGRAM

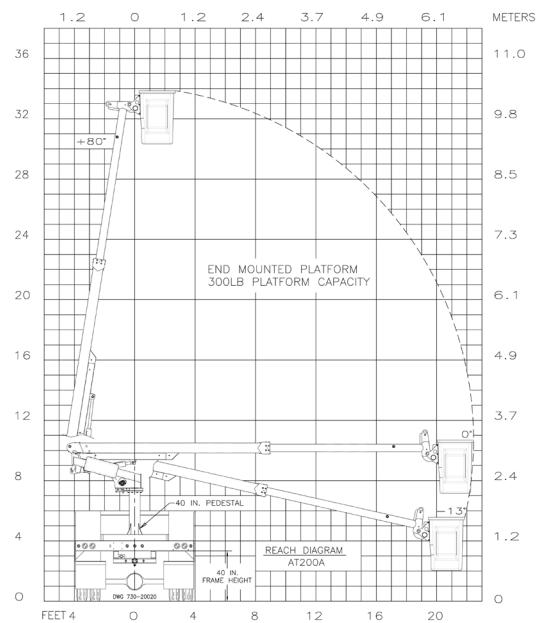

## END-MOUNT SPLICER PLATFORM



## OPTIONAL CANOPY BODY



NEW EQUIPMENT SALES

800.958.2555

SALES@ALTEC.COM

ALTEC.COM