


ATW Engineering Data & Dimensions

Models

ATW 36-3F to ATW 36-5F

ATW 48-3F to ATW 48-5G

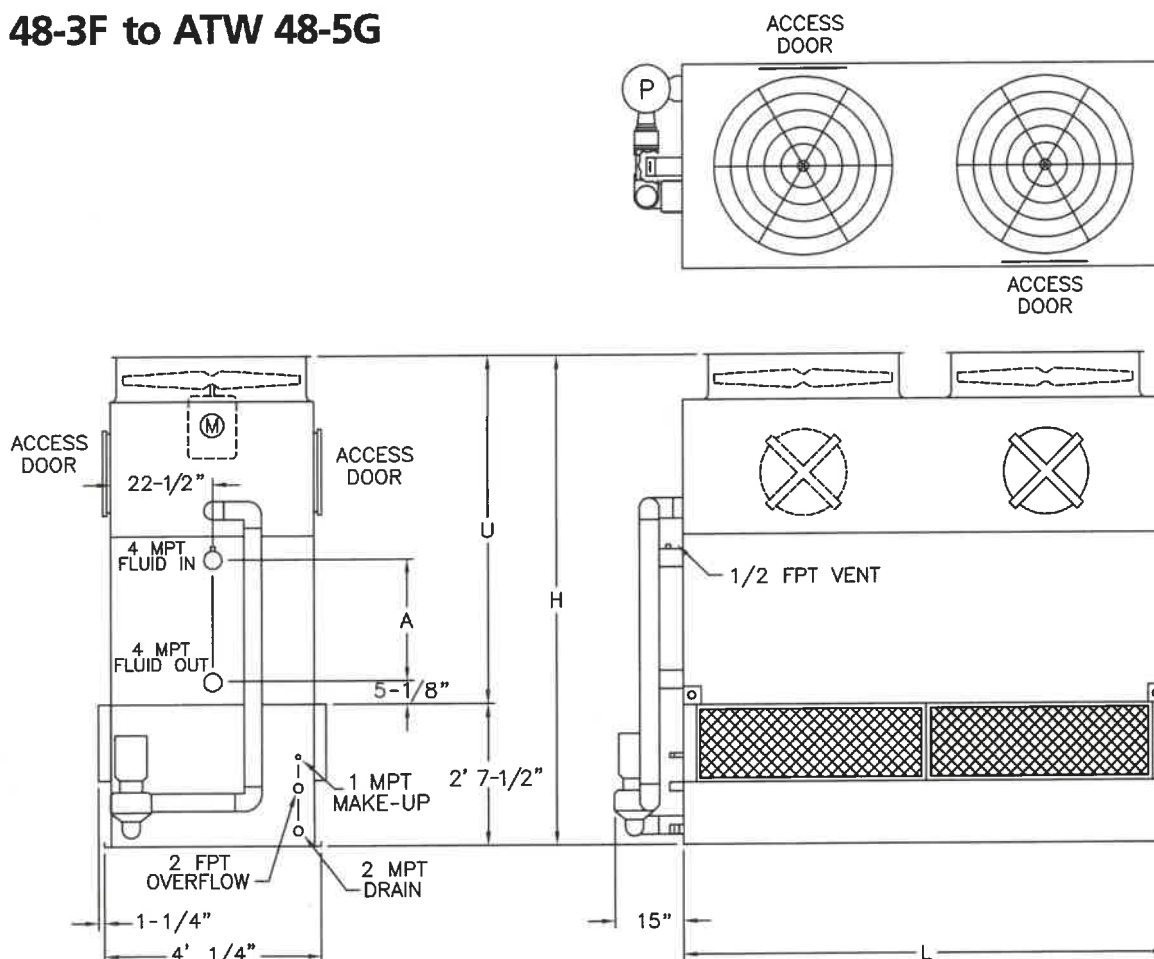

Note: The number of coil connections doubles when the flow rate exceeds 425 GPM on Models ATW 36-3F thru ATW 48-5G.

ATW Model Number	Weights			Fans		Spray Pump		Coil Volume (Gallons)	Remote Sump			Dimensions			
	Shipping	Heaviest Section†	Operating	HP	CFM	HP	GPM		Gallons* Required	Conn. Size	Operating Weight	H	L	U	A
36-3F	3,720	3,110	6,060	(2) 3	20,400	1	200	82	180	6"	5,580	8' 5-1/8"	8' 11-1/2"	5' 9-5/8"	19-1/2"
36-4F	4,330	3,730	6,900	(2) 3	19,800	1	200	107	180	6"	6,420	9' 5/8"	8' 11-1/2"	6' 5-1/8"	27"
36-5F	4,990	4,380	7,780	(2) 3	19,100	1	200	133	180	6"	7,300	9' 8-1/8"	8' 11-1/2"	7' 5/8"	34-1/2"
48-3F	4,750	3,980	7,910	(2) 3	25,300	1.5	270	108	230	8"	7,290	8' 5-1/8"	11' 11-3/4"	5' 9-5/8"	19-1/2"
48-3G	4,750	3,980	7,910	(2) 5	28,580	1.5	270	108	230	8"	7,390	8' 5-1/8"	11' 11-3/4"	5' 9-5/8"	19-1/2"
48-4G	5,620	4,840	9,080	(2) 5	27,700	1.5	270	143	230	8"	8,460	9' 5/8"	11' 11-3/4"	6' 5-1/8"	27"
48-5G	6,450	5,680	10,210	(2) 5	26,900	1.5	270	177	230	8"	9,590	9' 8-1/8"	11' 11-3/4"	7' 5/8"	34-1/2"

† Heaviest section is the coil/fan section.

* Gallons shown is water in suspension in unit and piping. Allow for additional water in bottom of remote sump to cover pump suction and strainer during operation (12" would normally be sufficient).

▲ Unit dimensions may vary slightly from catalog. See factory certified prints for exact dimensions.