

Robust, programmable cutter with hydraulic drive and 5,5" monochrome display.

Customer benefits

- Extensive programming options with a memory capacity of 198 programs
- Easy knife change with automatic interruption in the lower dead end and knife fine adjustment from the front
- Machine frame with optimized stability for optimum absorption of cutting forces and greatest cutting accuracy
- Minimal maintenance requirements due to the use of novel materials



Description of the machine

The cutter MOHR 66 is designed for one-shift operation. The precise and gentle swing cut is carried out hydraulically. Thus, the time of the knife spent in the lower dead end can be adapted to the material. The ultra-smooth stainless table surface allows an easy handling of the material even without air jets. Within a wide setting range the clamping pressure can be adjusted infinitely to each cutting material by means of a turning knob with scale. Bright LEDs mark the cutting line clearly visible for the operator.

The operation of the machine is done via an ergonomically positioned control panel with 5.5" monochrome display and additional membrane keypad. Recurring cutting sequences can be memorized (memory capacity 198 programs) and adapted at any time. The creation of the cutting programs is done either manually or menu-driven and intuitively via block programming. To optimize the cutting quality the pre-clamping time can be adjusted according to the material.


Technical data

| | |
|---|---|
| Cutting width | 670 mm 26.38 in |
| Feeding depth | 670 mm 26.38 in |
| Feeding height max. | 80 mm 3.15 in |
| Clamp pressure min. | 180 daN 397 lbs |
| Clamp pressure max. | 1,500 daN 3,307 lbs |
| Backgauge speed on return way (0 - ...) | 70 mm/sec 2.76 in/sec |
| Smallest cut, automatically, without false plate | 15 mm 0.59 in |
| Smallest cut, automatically, with false plate | 50 mm 1.97 in |
| Dimensions (w x d x h) | 1,250 x 1,825 x 1,500 mm 49.21 x 71.85 x 59.06 in |
| Weight | 675 kg 1,488 lbs |
| Electrical power input (apparent power) | 2.4 kVA |
| Fusing (Supply Voltage rotary current 360V - 420V 50/60 Hz) | 3 x 16A |
| Fusing (Voltage supply single phase AC 180 - 240, 50/60 Hz) | 1 x 32A |

Robust, programmable cutter for integration into the digital workflow with 18.5" touch-screen display, barcode reader, Compucut® and process visualization.

Customer benefits

- Barcode reader for automatic cutting program creation and loading of the assigned program via Compucut®
- Process visualization for the graphical display of the material handling to minimize the risk of errors
- Machine frame with optimized stability for optimum absorption of cutting forces and greatest cutting accuracy
- Minimal maintenance requirements due to the use of novel materials

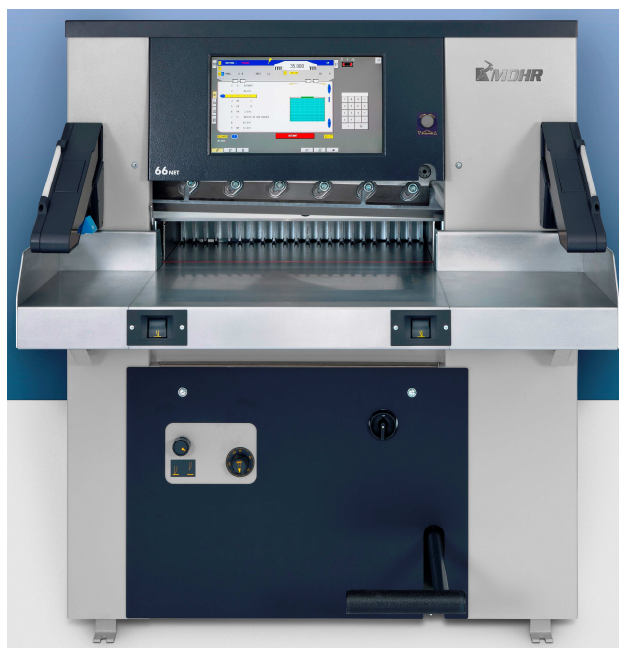

Description of the machine

The cutter MOHR 66 is designed for one-shift operation. The precise and gentle swing cut is carried out hydraulically. Thus, the time of the knife spent in the lower dead end can be adapted to the material. The ultra-smooth stainless table surface allows an easy handling of the material even without air jets. Within a wide setting range the clamping pressure can be adjusted infinitely to each cutting material by means of a turning knob with scale. Bright LEDs mark the cutting line clearly visible for the operator.

The operation of the machine is done via an ergonomically positioned 18.5" touch-screen display. Recurring cutting sequences can be memorized (memory capacity 1,998 programs) and adapted at any time. Integrated in the digital workflow the cutting data is taken over directly from pre-press into Compucut® as ppf- or jdf-file. Then Compucut® generates automatically the cutting program. To start the cutting program automatically the machine is equipped with a barcode reader. Hence, the set-up time can be reduced to nearly zero. With the process visualization the handling of the material is displayed graphically and so the risk of errors significantly downsized. To optimize the cutting quality the pre-clamping time can be adjusted according to the material.

Technical data

| | |
|---|---|
| Cutting width | 670 mm 26.38 in |
| Feeding depth | 670 mm 26.38 in |
| Feeding height max. | 80 mm 3.15 in |
| Clamp pressure min. | 180 daN 397 lbs |
| Clamp pressure max. | 1,500 daN 3,307 lbs |
| Backgauge speed on return way (0 - ...) | 70 mm/sec 2.76 in/sec |
| Smallest cut, automatically, without false plate | 15 mm 0.59 in |
| Smallest cut, automatically, with false plate | 50 mm 1.97 in |
| Dimensions (w x d x h) | 1,250 x 1,825 x 1,500 mm 49.21 x 71.85 x 59.06 in |
| Weight | 675 kg 1,488 lbs |
| Electrical power input (apparent power) | 2.4 kVA |
| Fusing (Supply Voltage rotary current 360V - 420V 50/60 Hz) | 3 x 16A |
| Fusing (Voltage supply single phase AC 180 - 240, 50/60 Hz) | 1 x 32A |