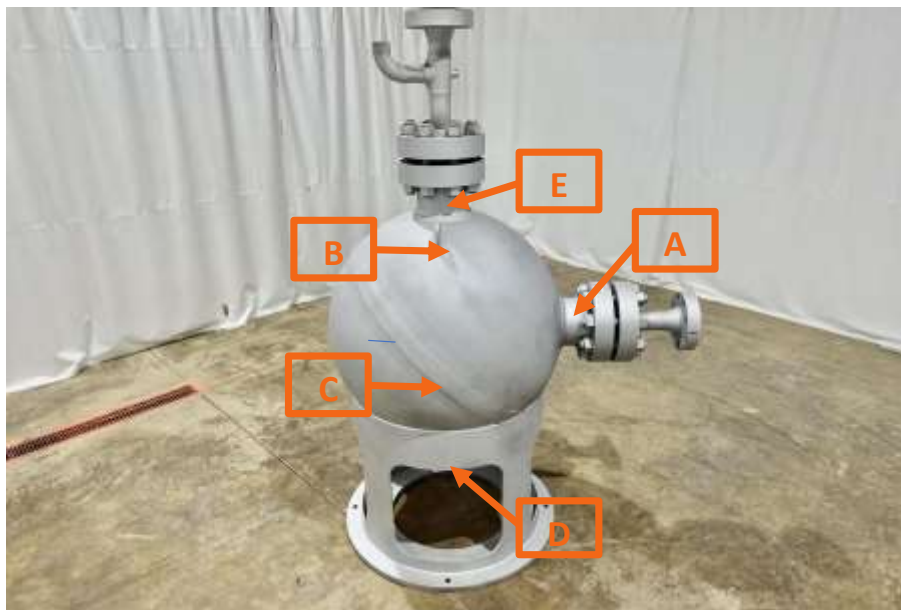


Date	ASSEMBLY	TRI-LOGIC WO#	MANUF. S/N	UT TECHNICIAN
7/21/2025	Sand Trap	1462-01	NB-2545	Bob O'Hara
UNIT DESC.				
Sand Trap, Spherical, 48", 5000#				


ULTRASONIC THICKNESS TESTING RESULTS

General Location	Specific Location	Rotational Location	Nominal Diameter (in.)	Thickness Measurement (in.)
Inlet	A	0 deg	6	2.837
Inlet	A	90 deg	6	2.823
Inlet	A	180 deg	6	2.796
Inlet	A	270 deg	6	2.827
Shell	B	0 deg	14'7"	3.741
Shell	B	90 deg	14'7"	3.930
Shell	B	180 deg	14'7"	3.565
Shell	B	270 deg	14'7"	3.366
Shell	C	0 deg	14'7"	3.665
Shell	C	90 deg	14'7"	3.192
Shell	C	180 deg	14'7"	3.731
Shell	C	270 deg	14'7"	3.788
Drain	D	0 deg	2	1.559
Drain	D	90 deg	2	1.554
Drain	D	180 deg	2	1.559
Drain	D	270 deg	2	1.559
Outlet	E	0 deg	6	2.799
Outlet	E	90 deg	6	2.799
Outlet	E	180 deg	6	2.794
Outlet	E	270 deg	6	2.799