


GREENMAX MELTER MARS C200E



**Compression
Ratio:**
90:1



> Screw melting technology enables continuous output at a ratio of 90:1. High-density ingot weights up to 25T per 40HQ container load.



> Equipped with reputable PHOENIX, SCHNEIDER, NSK components, GREENMAX ensures great safety, reliability and durability.



> Three stages of temperature control manipulate output color as white as possible.



> Easy operation. No Additional adjustment required during operation. Just start and stop.



> Easy 5S, Less foam scraps blow out and scatter on the ground during operation.




> UL /CSA certifications available upon request.

>APPLICABLE MATERIAL:

POLYSTYRENE		POLYETHYLENE		POLYPROPYLENE
EPS/ EPS DUST	EPS CUPS&TRAYS/ XPS	EPE	EPE ROLL/ EPE SHEET	EPP
				
				

>DIMENSIONS

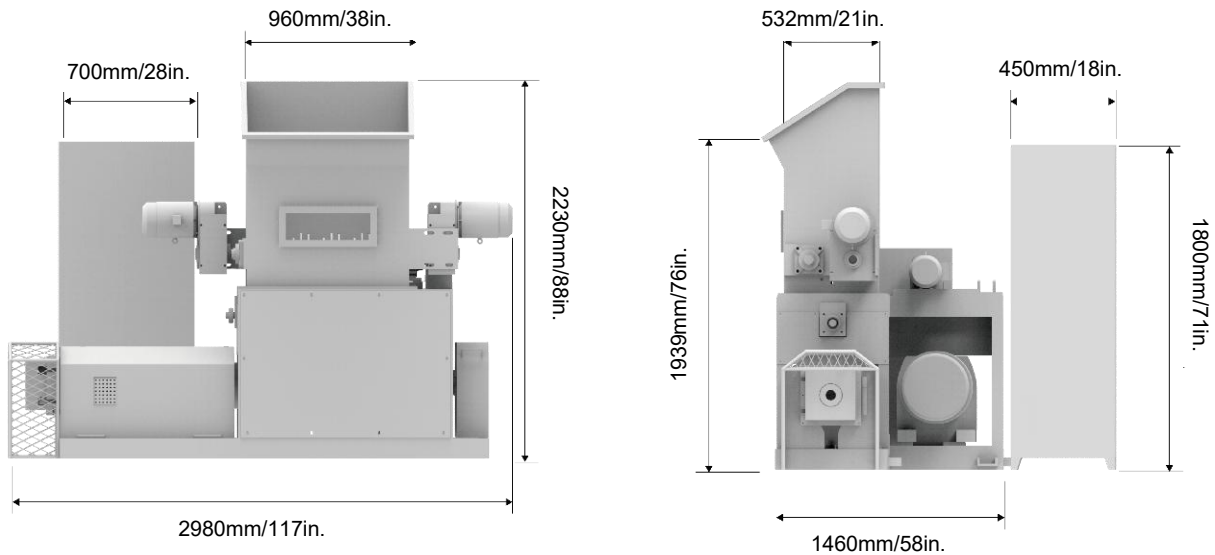

>TECHNICAL DATA

ITEM	M-C200E
Total Power Consumption	68.5 kW / 91.9 hp
Crusher Motor Power	2*4 kW / 2*5.4 hp
Screw Motor Power	30 kW / 40.2 hp
Agitator Motor Power (Compactor)	1.5 kW / 2 hp
Exhaust Motor Power	2.2 kW / 3 hp
Heating Power	26.8 kW / 35.9 hp
Production Capacity	Up to 200 kg per hour / 440 lbs per hour
Compression Ratio	90:1
Compressed Foam Density	600-800 kg per m ³ / 1011-1348 lbs per cu.yd.
Feed Hopper Dimension	960*532 mm / 38*21 in (L/W)
Dimensions	2980*1460*2230 mm / 117*58*88 in (L/W/H)
Shipping Dimensions	3080*1560*2480 mm / 121*61*98 in (L/W/H)
Weight	2550 kg / 5620 lbs