



RUNI A/S

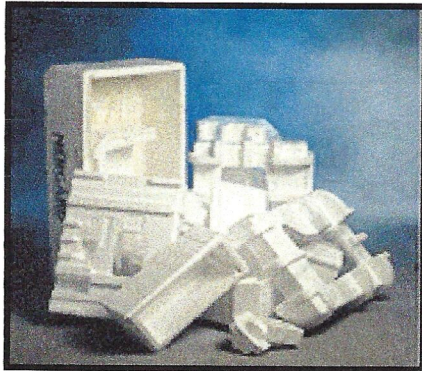

Compacting EPS RUNI SK240

Compacting Expanded Poly Styrene with a mass of 10g/l to 100g/l or 0,77 lbs/ft³ to 7,7 lbs/ft³ at a ratio up to app. 50:1

The results may vary depending on the quality of the EPS.

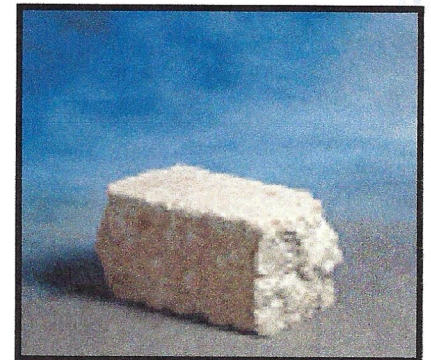

Production Data

Capacity per hour
Density achieved
Block measurement

Europe

app. 75 kg
app. 270 kg/m³
app. 24 cm x 24 cm

USA

app. 160 lbs
app. 16 lbs/ft³
app. 9.4" x 9.4"

Energy Consumption

Main motor
Hydraulic pump
Pre-crusher

5,5 kW
0,55 kW
1,1 kW

8.8 HP (6.6 kW)
0.88 HP (0.66 kW)
2.1HP (1.6 kW)

Electrical requirements


3 phase 400V ; 50 Hz 40 AMPS
3 phase 400 V; 50 Hz (HEAVY DUTY) 40 AMPS
3 phase 480 V; 60 Hz 40 AMPS
3 phase 480 V; 60 Hz (HEAVY DUTY) 40 AMPS
3 phase 230 V; 60 Hz 40 AMPS
3 phase 230 V; 60 Hz (HEAVY DUTY) 63 AMPS
3 phase 575 V; 60 Hz 32 AMPS
3 phase 575 V; 60 Hz (HEAVY DUTY) 32 AMPS

40 AMPS
40 AMPS
40 AMPS
63 AMPS
32 AMPS
32 AMPS


Dimensions (model 09-50059)

Length: 4,30 m
Width: 1,20 m
Height: 2,09 m
Weight : app. 1000 kg


14 ft
3 ft 11 inch
6 ft 10 inch
app. 2200 lbs



09-50059
SK240 for manual feed



09-50036
SK240 w HEAVYDUTY
pre-crusher for manual feed

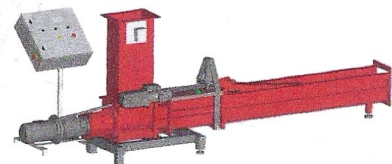

09-1882
SK240 for EPS dust