
International Baler Corporation

CLOSED DOOR HORIZONTAL BALERS

Features Include:

- Heavy duty welded construction
- Heavy duty hydraulic system with TEFC motor
- Integrated disconnect providing for lock-out/tag-out procedures
- Adjustable striker
- Spring loaded retractable bale retainer dogs
- Automatic cycling
- Multi-material capabilities
- PLC equipped electrical panel <u>UL Listed</u>
- Easy bale tie off
- Adjustable photo cell control
- Meets or exceeds all current ANSI Z 245.5 safety standards
- Safety release "Hydraulicly Operated Clam-shell" door lock
- Easy to operate controls

SPECIFICATIONS

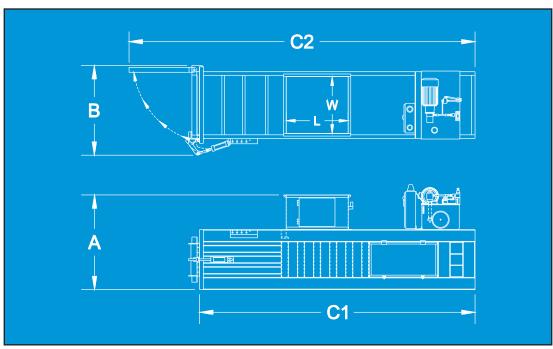

DIMENSIONS											
	NA-500	NA-1260	NA-1260HD	NA-1272	NA-1272HD	NA-1295	NA-1295HD	NA-1296	NA-1445-42		
Feed Height "A"	64 3/8	72	72	72	72	76	76	76	83		
Overall Width "B"	41	53	55	53	55	67	72	71	56 1/2		
Overall Frame Length "C1"	137	206	208	218	220	222	234	277	225		
Overall Length "C2"	178	246	250	258	262	276	292	334	266		

SPECIFICATIONS											
	NA-500	NA-1260	NA-1260HD	NA-1272	NA-1272HD	NA-1295	NA-1295HD	NA-1296	NA-1445-42		
Bale Size (inches)	42 X 30 X 30	60 X 30 X 36	60 X 30 X 36	72 X 30 X 36	72 X 30 X 36	72 X 44 X 36	72 X 44 X 36	72 X 44 X 36	60 X 30 X 42		
Main Motor Size	10hp	20hp	30hp	20hp	30hp	30hp	30hp	40hp	50hp		
Oil Reservoir (gallons)	20	80	120	80	120	130	130	200	216		
Main Cylinder Bore											
Total Force (lbs)	25,140	57,900	86,500	57,900	86,500	86,500	113,000	113,000	235,620		
Ram Face Pressure (psi)	28		80		80	54	71	95			
Feed Opening (inches)	28 X 30	28 X 50	28 X 50	28 X 50	28 X 50	42 X 50	42 X 50	42 X 60	28 X 50		
Cycle Time (no load) in seconds	15	20		20	23	23	30				
Shipping Weight* (lbs)	4,000	8,350	9,350	8,500	9,500	11,500	21,500	23,000	24,000		

NOTE: THE MODEL NA-1445-42 IS DESIGNED FOR ALUMINUM CANS AND PLASTICS.



INTERNATIONAL BALER CORPORATION

5400 Rio Grande Avenue, Jacksonville, Florida 32254 P.O. Box 6922, Jacksonville, Florida 32236 (904) 358-3812 * (800) 231-9286 * FAX (904) 358-7013

/ISIT US ON THE WEB: www.intl-baler.com

Or email us at: sales@intl-baler.com

* Weights given are approximate

As part of our continuing product improvement and quality assurance programs, specifications are subject to change without notice and without incurring responsibility to units previously sold.